Stereo Review

BUYING GUIDE


Features, Specs, and Prices of Receivers, CD Players, Speakers, Amplifiers, Tuners

GET IT
TOGETHER:
SYSTEMBUILDING
PRIORITIES




TESTED Marantz A/V Receiver, RD Speakers, Or Tuner, and mo





Imagine, for a moment, what it would be like to have your own private movie palace. No crowds. No \$15.00 boxes of popcorn. No beehive hairdos blocking your view. Just you, screening films in their original glory for your

family and friends. Well, that's precisely what it's like to own a JBL Home Theater System. Now unlike those trying to pass off glorified stereos as home theater systems by claiming "it's just like being there," JBL has, in fact, been there. Since the very first "talkie" in 1929,



And now we've transferred our experience and real-theater technology into a full line of components and systems for your home. Equipment that delivers the kind


of experience you once could get only by waiting in line and paying \$7.50 a ticket.

So unless your favorite theater happens to be on the market, visit a JBL dealer.

Once you've listened to our systems, it won't be long until you're sold on them.

Most Subwoofers Give You 25% More Than You Bargained For!

"Muddy' or "boomy' sounding bass is the by-product of TONAL HARMONIC DISTORTION (THD), the result of an increase in sound pressure level and a decrease in definition. THD is caused when a speaker is unable to accurately reproduce the required musical signal, creating extra harmonics that don't belong in the music. And surprisingly, 25% THD is a typical accepted distortion specification for most of the substooflers on the market today.




"It is the cleanest low-frequency reproducer I've ever heard." *

Velodyne solves the distortion problem with their patented "Motional Feedback – High Gain Servo" System. Unlike most "Servo" systems, which are based on voice coil impedance fluxuations and offer little improvement, Velodyne's system is based on a motion sensing device called an accelerometer.



This device is mounted directly to the speaker's voice coil, specificially to measure the acceleration of the speaker cone. The information is then sent to a comparator circuit, which compares the differences between the pure signal from the source and the signal derived from the speaker's motion. These differences rebresent distortion.

The signal going to the woofer is then corrected (at 3500 times per second), to match the source signal. The result – clear, powerful bass with virtually no distortion – is the sound of a Velochne.



"...the Velodyne produced no distortion I could hear or see on the scope...This placed it in a class by itself."*

Velodyne invented high-technology, low distortion subwoofers over ten years ago, receiving such critical acclaim from the audio press worldwide that it remains the standard by which others are judged.

Which is exactly what you bargained for.

"...If you want it all, the Velodyne is the subwoofer of choice." *



The Bottom Line In Be Velodyne Acoustics, Inc.

1070 Commercial St., Suite 101 San Jose, CA 95112 408/436-7270 800/835-6396

* Graphs & quotes reproduced from "THUNDER IN THE LISTENING ROOM by D.B.Keele, Jr. - Audio Magazine, Nov. 1992



Cover
Among the hundreds of components in our
annual Equipment Buying Guide, starting on page
71, are (clockwise from top right) the Marantz
AV500 preamplifier, Technics SL-PD947
five-disc CD changer, Pioneer Elite VSX-97 A/V
receiver, Acurus Model 200X3 power amplifier,
Mirage M-990 speakers, and Polk RM3000
three-piece sub/sat speaker system.

Photograph by Roberto Brosan

	_	-	-	-						
BULLETIN										
LETTERS										8
NEW PRODU I										
PERIPHERAL										
SIGNALS										
A&D OIDUA									2	4
TECHNICAL T										
POPULAR ML										
CLASSICAL N	IUSI	C						1	4	2
TIME DELAY								,	6	,

COPYRIGHT © 1994 BY HACHETTE FILIPACCHI MAGA ZINES, INC. All rights reserved. Stereo Review, February 1994, lune 59, Number 2. Stereo Review (ISSN 0039-1220) is pub lished monthly by Hachette Filipacchi Magazines, Inc. at 1633 listed monthly by fraction Purpose in Magazines, Inc. at 1633 Benadusty, New York, NY 10019, telephone (212) 767-6600, Oneother countries, \$23,94; cash orders only, payable in U.S. currency Second-class postage paid at New York, NY 10001, and at add tional mailing offices. Authorized as second-class mail by the Post Office Department, Ottawa, Canada, and for payment of postage in cash. POSTMASTER / SUBSCRIPTION SERVICE: Please change-of-address forms and all subscription correspondence to treo Review, P.O. Ben 55627, Boulder, CO 80322-5627. Please allow at least eight weeks for the change of address to become of fective. Include both your old and your new address, enclosing, if possible, an address label from a recent issue. If you have a cription problem, write to the above address or call (303) 447 9330. PERMISSIONS: Material in this publication may not be re produced in any form without permission. Requests for permission New York, NY 10019. BACK ISSUES are available. Write to Segro Review-Back Issues, P.O. Box 2003. Brick, NJ 00723. Enclose a check for the cover price of each issue you want plus \$1.75 each for shipping and handling. For telephone credit-card orders, call (908) 367-2900. EDITORIAL CONTRIBUTIONS must be accompanied by return postage and will be handled with reasonable care, but the publisher assumes no responsibility for the return or safety of unsolicited manuscripts, art, or photographs

Stereo Review

CORPORATING HIGH FIDELITY

EOUIPMENT

Equil ment	-
Equipment Test Reports	i
RDL Acoustics F-1 and FS-1 loudspeaker systems, page 30	
Nakamichi MB-4s MusicBank CD changer, page 33	
Onkyo T-450RDS AM/FM tuner, page 36	
DGX Digital Deconvolution Audio System, page 42	
Marantz SR-73 A/V receiver, page 51	0
Getting It Together A sten-by-sten quide to system building • by Daniel Kumin	b
A step-by-step guide to system building • by Daniel Kumin	-

1994 Equipment Buying Guide
Features, specs, and prices of hundreds of audio and audio/video components • by Bob Ankosko, José Garcia, and staff

Receivers, page 72 Amplifiers, page 78 CD Players, page 93 Tuners, page 101 Speakers, page 103 Directory of Manufacturers, page 129



Page

133

MUSIC



Record of the Year

Awards
The 12 best releases of 1993 and some very honorable mentions

Disgraceland

The 10 worst pop albums of 1993

Best Recordings of the Month

A Velvet Underground reunion, rediscovered Baroque master Johann David Heinichen, Cassandra Wilson's "Blue Light "Til Dawn," and a real Roman Tosca

Page 134



JUMBO CHANGER

BOOM? CD changers are big sellers these days-especially carousel models that spin five or six discs on an LP-size platter. Now it appears that there may be a market for changers that spin-and store-as many as 100 discs. TVC's XL-MC100 (\$1.100) is the latest 100-disc model to hit the scene, joining Sony's 100 disc CDP-CX100 (\$1,200) and Fisher's 24-disc Studio 24 (\$499), among others, Actual selling prices of these changers are much lower than list in some parts of the country, which no doubt is fueling sales; Fisher's Studio 24, for example, has been advertised in New York-area papers for \$299. It's too soon

BMG GETS ACTIVE

BMG New Technologies, a new division of the \$3 billion Bertelsmann Music Group (BMG), has forged a joint venture with the multimedia publisher Ion that aims to develop "groundbreaking" interactive programs. The first release is a CD-ROM based on David Bowie's "Jump They Say" video that lets users edit their own video using raw footage.

In cooperation with cable giant Tele-Communications Inc. (TCI). BMG is also planning a midvear launch of an interactive cable-TV channel that will enable viewers to vote for favorite videos and to order concert tickets. T-shirts, and other musicrelated products. CD's won't be offered—at least initially.

to tell whether the reported flurry of sales activity in iumbo changers is a bona fide boom or an electronic

hula hoop.

KNOCK ON NAK In response to reports from Japan that one-time high-end cassette leader Nakamichi is abandoning the analog tape format to focus on CD components, a company spokesperson in the U.S. said the reports were based on a misinterpretation: "What they said [in Japan] was, 'As long as there is a market for cassette decks, we will produce them, but the market is shrinking."

MAINSTREAM MULTIMEDIA

Blockbuster Entertainment, the 3,000-store national video chain, recently began testing the sale and rental of CD-ROM-based multimedia hardware and software in fifty-two video stores and five music stores in San Francisco, More than 200 titles are being offered for five hardware systems: CD-I, 3DO, Sega CD, IBM PS/1, and Apple's new Macintosh TV. The TV-based CD-L 3DO, and Sega CD systems are available for rental, at the rate of \$14.95 for three evenings. The rental rate for individual software titles is \$4 for three evenings. For \$19.95, customers can rent one of the players and three titles. The program will be

MUSICAL LEGENDS

The Musical Theater Hall of Fame has inducted George and Ira Gershwin, Jerome Kern, Alan Jay Lerner and Frederick Loewe, Ethel Merman, and Richard Rodgers and Oscar Hammerstein II. . . . Musicians to be honored with stamps issued by the U.S. Postal Service in 1994 include Mildred Bailey, Nat King Cole, Bing Crosby, Billie Holiday, Robert Johnson, Al Jolson, Ethel Merman, Ma Rainey, Jimmy Rushing. Bessie Smith, Ethel Waters, Muddy Waters, and Howlin' Wolf.

evaluated at the end of March, according to Mike van der Kieft. Blockbuster's director of business development. Then we'll recraft it and hopefully roll it out nationally."

GET SMART WITH MOZART

Researchers at the University of California, Irvine, have demonstrated that listening to 10 minutes of Mozart's piano music before taking intelligence tests improved students' test scores significantly regardless of sex and musical tastes. The influence of country music, rap, rock, and jazz has vet to be tested. The recording used in the UC Irvine research Mozart's Sonata for Two Pignos, K. 448, played by Murray Perahia and Radu Lupu (Sony 39511)—is available over the counter without a prescription.

AUDIO JOURNAL

Perreaux, a highly regarded New Zealand-based maker of separates, is making o comeback in the U.S. market following a higtus of several years. Five power amplifiers and two preamplifiers are now available under the twenty-year-old brand name. Call (716) 894-7183 for a brochure....DCM, maker of the Time Windows speaker line, is celebrating its twentieth anniversary this year.

MUSIC ON TV

This month's lineup of artists on the popular Saturday night PBS show "Austin City Limits" includes Bruce Hornsby and John Mayall (February 5), John Anderson and Billy Dean (February 12). and Patty Loveless and Monte Warden (February 19). The Best of Merle Haggard, a retrospective, will air on February 26.

This year's Grammy Awards show put on by the National Academy of Recording Arts and Sciences will originate at Radio City Music Hall in New York City on March I and will be telecast by CBS.

POCK 'N' POLL MODELS A recent survey conducted by

the tape division of Fuii Photo Film U.S.A. indicates that two out of three 18- to 24year-olds think musicians should do more than just make music. According to Fuii's latest "Voices of Young America" survey, 69 percent of young adults think musicians have a responsibility to be positive role models for their fans Only 26 percent of those surveyed said they are involved in some kind of community-service activity but 71 percent of those who are involved spend three hours or more per week in volunteer work

Fuji itself participates in many community-service projects. Besides sponsoring sports activities for young people, the company supports the U.S. Marine Corps Reserve's Toys for Tots drive and has established college scholarships for aspiring young filmmakers and videographers.

All the controls you need to operate a high performance stereo system.



Ditto.



Obedience. Some people think the only way to get it from a stereo system is to stand there and fiddle around until it finally gives them what they want.

Until they try a Bose^o Lifestyle^o music system.

Then they're amazed at how such a small, elegant system could respond so quickly with so little effort.

The secret is the radio frequency remote control. And the highly selective receiver designed to catch the very narrow band of

narrow band of radio signals. So, unlike the signals of a portable telephone for instance, there's no cross talk.

Communication happens almost instantaneously and virtually errorfree. No matter where you're standing – in the same room, on a different floor, or even outside.

The obedient remote control, Virtually Invisible' speaker design, and the elegant one-piece AM/FM tuner and CD player are results of the research Bose has invested in the Lifestyle' music system. But the best result is the spacious stereo image and the true-to-life performance the Lifestyle' system delivers. And that, we think, is what you really want from a high performance stereo system.

Once you see it and hear it, we think you'll be convinced.

Visit your Bose dealer and

listen to a Lifestyle® 5 music system.



hassle – any serious music lover could want.


For the name of a Lifestyle[®] music system dealer near you, call Bose toll free:

1-800-444-BOSE (1-800-444-2673) Ext. 329

Monday - Friday 9AM - 9PM: Saturday 9AM - SPM



©1994 Bose Corporation, The Mountain, Framingham, MA 01701-9168 Covered by patent rights issued and/or pending. JN94753

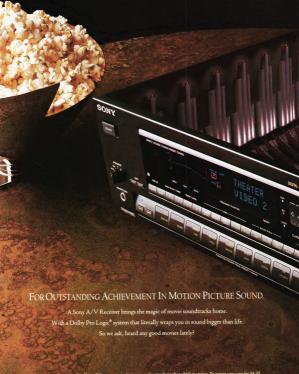

For you complete personal guide to all Sony comment electronics, with attroducing Sont Style magazine. To receive your copy for \$4.50, plan \$1.50 deeping and handling, all, \$1.500-\$48.5500. Vir, and MC. Offer appears \$4.56.000 \$5.000 plans the strength of the plans of the style of the strength of the style of the s

SONY



Stereo Review.

Vice President, Editor in Chie LOUISE BOUNDAS

Executive Editor
MICHAEL RIGGS
Art Director
SUE LLEWELLYN

Director, Hirsch-Houck Laboratories
JULIAN HIRSCH
Senior Editor Technical Editor
BOB ANKOSKO DAVID RANADA

DAVID STEIN
Popular Music Editor Classical Music Editor
STEVE SIMELS ROBERT RIPPS

MINDY OSWALD

Associate Editor Assistant Editor

MARYANN SALTSER JAE SEGARRA

Editor at Lorge

WILLIAM LIVINGSTONE

Contributes: Robert Ackart, Chris Albertson, Rebects Day, Richael Freel, Jase Garcia (Buyers Guides), Phyl Garland, Ros Greens, Devid Hall, Byna Harrdt (Todyn), Roy Horming, Raiph Hodges, Googy Jellinek, Sonkhard Lincale, Ian Manten, Alaran Nah, Henry Pleasant Calondon, Ken Palmanan, Parke Parerbusgh, Charles Rodrigues, Eric Saltman, Parke Parerbusgh, Charles Rodrigues, Eric Saltman, States and Santh Devid Partick Steams.

> Vice President, Group Publisher THOMAS Db. WITSCHI

Consumer Electronics Group Advertising
VP/Associate Publisher
Tony Catalano

Regional VP/Ad Director, East Coatt: Charles L. P. Watton, (2):27-63-6368 Regional Account Manage, East Coatt: Christine B. Forther, (2):27-67-6325 Regional VP/Ad Director, Midwest: Scott Constantine, (2):27-67-6346 Regional VP/Ad Director, West Coatt: Robert Meth. (2):39-54-4831

Western Advertising Manager: Paula Mayeri, (213) 954-4830 Sales Assistant: Nikki Parker National Record Label Sales Representaives: The Mitchell Advertising Group (MAG Inc.)

The Mitchell Adverting Group (MAG Inc.)
Mitch Herskowltz, (212) 490-1715
Steve Gross, (212) 490-1895
Assistant to the Publisher: Alline J. Pulley
Operations Manager: Sylvia Correa
Adventiting Coordinator: Linda Neuwelle

Tride Show Coordinator: Barbara Alikem Sales Assistant: Yvonne Telesford Classifed Advertising: (800) 445-6066 Production Manager: Vicki L. Feinmel

Production Director: Patti Burns
Business Manager: Christine Z. Maillet
General Manager: Greg Roperti

IHIFM Hachette

hi Storeo Review is published 68 by Hachette Filipacchi Magazines, Inc.

Chairman: Daniel Pilipacchi
Preidiere, CEO, and COO, David J. Pecker
Executive VP and Editectal Director: June-Louis Gishler
Senior VP, Gobbal Adversaing: Paul Du-Lame
Senior VP, Directors of Carponne Sader. Nicholas Manasao
VP, Director of Senegae Planning, Advertaing,
and Carvalations: Patient Lindhal
VP, General Carsaint, Catherine Facility, VP,
General Cansaint, Catherine Facility, VP,
General Catherine, VP,
General Catherine,

VP, Mazufacturing & Distribution: Authory Romano
VP, Circulacion: Leon Rosenfield
VP, Research & Marketing Services: Suam Smollens
VP, Communicacions & Special Projects: Keith Enaberold
VP, Magazine Development: Marcia Sachar

, Magazine Development:

LETTERS

Home Theater Speakers

the watching a couple of movies, including Jurassic Park, at our local THX cinema, I am in agreement with Rahjh Hodges's position ("The High End." November) that well-designed general-purpose loudspeakers are perfectly suitable for of a high-end home theater is at least equal to that of a THX cinema. This view is shared by the director Jumes Cameron (The Aptra, Alkinz, Erminator, and Terminator 2) in the May/June 1993 issue of Wileizeren Review.

Getting the Hum Out

eter Mitchell's article on digital radio in November described [a hum-reducing method using] two balurus connected together (page 108, "Getting the Hum Out"). As he noted, that arrangement will not usually reduce hum caused by ground loops. Replacing the 300-shm line conductors (in his diagram] with 1,000-picofarad capacitors (see sketch), however, creates a very



effective cable ground isolator. The parts required to build it can be obtained for a

few dollars at any Radio Shack store.

JACK PORTER
San Diego, CA

for experiencing low-level hums and bury midraing from my stere system to the for the incoming cable, and the hum and buzz stopped. I called my cable company, other planet. They sent a man down to check the cable signal, which of course was perfect. When I called some repetable asserted. When I called some repetable asshouldn't be happening but gave no bely. The MAGIC Box from Mondial Designs described in Peter Mickels* "Getting the described in Peter Mickels* "Getting the Cable State of the Cable Stat

inks for helping me keep my sanity. Tom D'AURIA West Islip, NY

have been fighting ground-loop hum in my satellite-antenna A/V system for some time. Is there such a thing as a video ground-loop isolator? RICARDO J. VEGA San Jose, CA We don't know of a commercial device, but you might try the hook-up described in Mr. Porter's letter above.

Thanks to Peter Mitchell's article, I am experiencing the greatest broadcast and over vein DaMC, When I had the DMX box installed, the first thing I noticed was an audible hum. The eable folks an audible hum. The eable folks are stumped. After the usual troubleshooting, I are strongly appeared to the proposed of the control of the proposed of the p

BARRY W. MILLER La Crosse, WI

Allison Acoustics

ber a Alisson Acoustics thought readers would be interested in an update to Ralph Hodges's column about Alison loudspacers and our company's founder, Roy Allison ("The High End," May 1993). Mr. Hodges implied that we had stopped producing Allison speakers, Actually, Sanford Acoustics, which acquired Alison Acoustics last winter, had already been manufacturing the Alison lines in its Kennacky plant for several years, and the acquired Mission and the Alison lines in the Alison Acoustics last work and the last acquired manufacturing the Alison lines are the Alison Alison Acoustics and the Alison account of the theory of the Alison Acoustics and the Alison Alison account of the Alison Acoustics and the Alison Alison and the Alison Ali

Last summer we introduced new Allison speakers, notably our surround-sound systems, and we'll continue to add models that meet our high standards. We're also servicing all existing Allison speakers and honoring all warranties. Tom Resslers VP/General Manager, Allison Acoustics

Danville, KY

Ode to Billy Joe

axiated to see the Billy Joe Shaver "Best of the Month" review in November. Had to write to say there is a previous CD of his, called "Salt of the Earth," and it's great. I found it in a bargain bin two or three years ago, it's a Columbia release, looks like 1987 from the fine print. Anyone who likes Billy Joe Shaver should own this. RITR MACKIO Ridefield. WA

Flip-Flopped Brass

n some circles it has been claimed for years that Canadians are different from Americans. The photograph accompanying Roy Hemming's article on the Canadian Brass in December proves it. David Ohanian's rare right-handed French horn is illus-





MISCONCEPTION #3. A surround is a surround. Hope. By firing sound forward and rear, the dipics 97th, surround washins your walls with sound. Thereby transporting you to the middled or carryon, a city street, or the forest planet famole planes don't feed the Revelle, in fact, we believe the 875th in the finest surround speaker.

true space is achieved with Boston 575x surrounds. These dipolar speakers, unlike conventional ones, use walls to reflect sound several times before it reaches your ears. So the sound envelops you and you feel like



Actually, meet of what THX is lise in the the speakers are configured. Take our State our State

you're right in the middle of the scene. And finally, what's a move without an explosion or two without an explosion or two shows built the sight, powerful Boston 95% subwooders to deliver the visceral side of a movie's sound effects and music. All of which can be heard at your local Boston dealer. Stop by for a demo. New that you know what you're listering to.

Boston Acoustics
Just what's important

ston and Beston Acoustics are trademarks of ston Acoustics, Inc. All other trademarks are th spetty of their respective holders.

What the heck is this THX thing? A running shoe? A dessert top-

ping? Misconceptions abound.

But here's the skinny. THX is a
system designed by the folks at
Lucas Entertainment. Its aim:
to make a film sound just as

impressive from your easy chair as it did from the director's chair in his fancy high-tech dubbing suite.

MISCONCEPTION #1. Most people think THX uses a new and different encoding method. Not so. In fact, at its heart, the THX controller has a Delity ProLogic decoder, so it accepts any Delby encoded TY program video tape or laser disc (unfortunately, that includes stabled. We like to think of it as Delby Pre-domin. reflore stabled. We like to think of it as Delby Pre-domin. reflore

MISCOMERPTION 42. Some felix thinky you need to buy the entire system all at once. But, le foct, the pieces of the Boston THX system are available separably. You can even power them with your existing Dotby ProLogic receive and upgrade to the THX electronics later.

The system consists of six THX speakers, and a THX controller/ amplifier combo. Boston Acoustics THX speakers offer a great deal more than conventional speakers

when it comes to home theater. Specifically, dialog is clearer,

effects are more readily localized

cos across he screen sounds as such,
with a smooth transition from side
in to side). All of the shaws to the
555x speaker's narrow-vertical
dispersion pattern. Sound travels
did to your ears without ricocheting
off the floor or ceiling, which can
blur crucial dislage and effects.
Another advantage, a series of

on and off screen, and panning is

more natural (a horse galloping

receive a free copy of Number, the Boston Acoustics measures of music, circle Reader Service No. 9

trative of the difference. And Gene Watts's trombone appears to be custom-made as well, no doubt to accommodate a southpaw slide action.

GORDON C. WILEEN Alexandria, VA

Only one member of the Canadian Brass is actually Canadian, but all five of them were "Rapped" in production. Sorry.

Digital Connections

In January "Letters," David Ranada's reply to a query about recording CD to MDC to a query about recording CD to MDC to the potential problem of the MDS-101. The MDS-101 does not have a MDS-101. The MDS-101 does not have a standard Tostlink fiber-optic input and output that can use Sony's Optical cable POC-15, which it has made for years. The monstandard POC-MZI optical cable Mr. Ranada referred to is for Sony's MZ-1 and other portables.

Coxul Mess. CA.

Coxul Mess. CA.

Technical Editor David Ranada replies: Mr. Garwood is entirely correct, and we apologize for misreading the original letter. But that doesn't absolve Sony and other manufacturers from requiring the separate purchase of "accessory" cables for what is an essential function of a digital recorder: di-

rect digital dubbing (eliminating a cycle of digital-to-analog-to-digital conversion).

"Catfish Row"

n his December review of the Levine/ Chicago Symphony recording of Gershwin's orchestral music, Eric Salzman praised the Cat/ish Row suite and asked, "Where has it been all this time?" The St. Louis Symphony under Leonard Slatkin has recorded it twice, first in 1974 for MMG, then in 1987 for EMI. DAVID WEISSTOCK St. Louis MO.

eiji Ozawa recorded the Catfish Row suite with the Berlin Philharmonic ten years ago, and it was issued on LP by EMU, Angel. According to the liner notes, the first performance was in 1936, but it was not called Catfish Row until it was revived in 1958 and given that title by In Gershwin. WILLIAM I. BERNELL SAN FIRENELCS.

Used CD's

en Pohlmann's comments on the sale cof used CD's in his December "Signals" column, "As Good as New," hit a chord with me. Entertainers' objections, and those of their publishers, to the resale of used CD's are greedy and self-serving. If I record a selection off the air onto MD, for example, the artist gets paid several times: for the original recording, for the broadcast, and as part of the purchase prices of my MD system and bank MD. Now they want the same protection from the marketplace for CD's. That wond "protection" reminds me of Chicago during the Al Capone era. It's a payoff for doing nothing, and they're even getting. Congress to provide the strong-arm tactics.

ALAN R. APPLEGATE [city and state withheld by request]

Penultimate Power

recently received an invitation from a local audiophile store to listen to the "penultimate power amp." I can only assume either that the store is going out of business and can't move its last two amplifiers, or that they'd like me to plan ahead and buy the second-to-last amp I'll even own. I'm twenty-four. Do these guys know something I don't?

Wynn Maxtmi
Husston TX

We welcome your letters. Please address correspondence to Editor, Stereo Review, 1633 Broadway, New York, NY 10019. You should include your address and telephone number for verification. Letters may be edited for clarity and length.



FOR \$699 YOU CAN BRING HOME THE BEST IN THEATER SOUND. AND LEAVE THE WORST OF IT BEHIND.

Introducing the highly affordable Ashert Home Theater System. Five proudly crafted speakers that will awaten your ining room with the runthle of a passing chopper. Or the grumble of a syrannosaurs in the brush. With the only coughing, crying and gabbing coming from the set. Just 5909 gets you the Video Shelded Protigy." Towers in black cask for front speakers, Mini-Advent rear channel speakers for special effects and the Advent Audrof Focus" shielded center channel for falsague.

But if you already own speakers, you can mix and match any of these pieces. So you only pay for the speakers you need.



For free literature and the name of your nearest dealer, call 1-800-477-3257.

C 1993 Advent is a registered trademark and Prodigy and Audio Focus are trademarks of international Jensen Inc. in Canada, call SCL Products 604-273-1095 (B.C.) 416-890-0298 (ONT).

ASERDISCS FOR THE PRICE OF With nothing more to buy ever!





The Bodyguard

Groundhog Day

Lost in New York

2001: A Space C

Passenger 57 E.T.: The Extra-Ti

Lethal Wespon

Lethal Weapon

Lethal Weapon:

Sneekers

The Godfathe My Cousin Vinny

Indecent Propos



The Hunt For

Allene Allen 3

Robin Hood:

"Get Back

1071504 Supermen: The Movie
 10000003 Ferror World

Patton

Apocalypae Now

Beetleiuice

The Empire Of T

Conen The Barbarian







a 0844209



Buy only what y ou want! If you want the Director's Selection, do nothing—it will be sent auto-matically. If you'd prefer an alternate selection, or none at all, just mail the response card always provided by the date specified. And you'll always have 14 days to decide: if not, you may then return the selection at our expense 10-Day Risk-Free Trial, We'll send details of the Club's operation with your introductory package

n of your far sc! Start by choosing a laserdisc from this ad! You agree to buy a laserdisc at regular Club prices (currently as low as \$29.95) within a year, and you can then choose a third laserdisc

If not satisfied, return everything within 10 days and no further obligation **SAVE UP TO 50%**

After you get 3 laserdiscs for the price of 1, enjoy instant savings. For every disc you buy at regular Club price, get another at up to 50% off.

-800-538-2233 Deg

SEND NO MONEY NOW-JUST MAIL THIS COUPON!

Columbia House Laserdisc Club Dept. CF6, P.O. Box 1117 Terre Houte Indiana 47811-1115

Yes, please enroll me under the terms outlined in this advertisement and send me the laserdisc indicated below. As a member I need only buy just one laserdisc at the regular Club price during the next year—after which I can choose one more laserdisc free! That's three for the price of one, with nothing more to buy ever! Shipping and handling charges are added to

Send me this laserdisc now	
Nome	
Address	Apt.
City	State

Phone No. () _ Have you bought anything by mail in the past? ☐ Yes ☐ No (27)

How have you paid for your mail-order purchases? (Check all that apply) □ Cosh ⁽²⁸⁾ □ Credit Cord ⁽²⁴⁾
□ Check ⁽²⁰⁾ □ Money Order ⁽³⁰⁾ This offer applies to first-time Laserdisc Club

members only. Limit one per household. Note: Columbia House Laserdisc Club reserves the right to reject or concel any membership. Offer limited to continue the reject of concel any membership. Offer limited to continue the reject of concel any membership. Offer limited to continue the reject of concelling Alaska). Applicable sales to added to all orders.

Letterbox



NEW PRODUCTS





WAK SOUND

MAK's 12-inch-tall S-90 sneaker is designed to reproduce music or movie soundtracks. Frequency response is given as 72 Hz to 20 kHz ±2 dB and power handling as 200 watts. Price: \$750 a pair in oak or black oak. M&K Sound. Dept. SR, 10391 Jefferson Blvd., Culver City, CA 90232. · Circle 121 on reader service cend



A JVC

The latest CD "jukebox" comes from JVC in the form of the XL-MC100, a two-piece system featuring a standard-componentsize controller and a 14-inchsquare transport module that holds 100 discs: the two units are linked by a coaxial digital cable.

Discs can be stored and accessed by title or artist name as well as classified according to music type or other user-specified criteria. Up to ten user files can be created, each capable of storing information for sixteen discs. including tracks to be deleted

during playback. Disc searches can be done using the supplied remote control, which has an LCD nanel. An album to hold CD liner notes is included, Price: \$1,100. JVC. Dent. SR. 41 Slater Dr. Elmwood Park, NJ 07407. . Circle 120 on reader service card



▼ REEL TO REAL DESIGNS

The Legacy power amplifier from Reel to Real Designs is a Class A/AB device rated to deliver 220 watts ner channel into 8 nhms or 380 watts into 4 ohms. The amplifier uses zero negative feedback and is said to be stable

into 2 ohms. It supports biwiring and has both balanced and standard RCA inputs. Price: \$1.995. Reel to Real Designs, Dept SR, 3021 Sangamon Ave... Springfield, IL 62702. Circle 122 on reader service card



A AIWA

A follow-up to the AMD-100 portable MD player/recorder introduced last year. Aiwa's playonly AMD-50 weighs less than 11 ounces and is small enough to tit in a shirt pocket. It features repeat and random play modes, a hass-hoost switch and a 3second buffer memory said to

prevent gaps in playback when the unit is joited. A miniature, full-function remote control with an LCD panel is wired into the cord of the supplied headphones. Price: \$550. Aiwa, Dept. SR. 800 Corporate Dr... Mahwah NJ 07430 · Circle 123 on reader service card

Introducing The Next Best-Selling Loudspeaker Of All Time.

More than 30 years ago, Henry Kloss designed the now-legendary KLH Model Six, the first speaker to fully exploit the potential of two-way design. By using the then-new principle of the acoustic suspension woofer, as well as creating a new type of long-throw integral-dome tweeter, he was able to make a speaker that provided outstanding performance at a moderate cost. A decade later, he took these principles still further with the Advent loudspeaker, one of the best selling speaker models of all time. Both speakers were considered industry benchmarks for price/performance. We are now pleased to announce

Cambridge SoundWorks' Model Six, a twoway system named in honor of Henry Kloss' first ground-breaking two-way system.

Not An "Extension Speaker."

Model Six is not an "extension speaker." It's a serious main speaker with sufficient frequency range and power-handling to satisfy serious listeners. Model Six speakers, when combined with a good receiver and CD player, comprise a music system for \$500-\$600 that seriously outperforms typical pre-packaged "shelf" or "rack" systems

Two-Way Design Advantages.

We believe that when lowest cost is not the ultimate consideration, the best speaker design is a subwoofer-satellite system like our Ensemble® and Ensemble II systems. But a properly designed subwoofer-satellite system requires three-way design, which entails the cost of two more drivers and a third cabinet. While neither Ensemble system is "high end" in price, a complete stereo system starts at about \$800, still too much for music lovers on a budget.

"...the Model Six is truly a high-quality speaker...It has an 'all there' sound quality that belies its amazingly low price and does credit to its heritage...At only \$119 each, the Model Six is an exceptional -Stereo Review



Model Six continues a long tradition of best-selling, high performance, high value, two-way speakers by Henry Kloss. Very natural, accurate, wide-range sound-only \$119 each!

What does Model Six give up compared to our Ensemble systems? With big amplifiers in large rooms, Ensemble and Ensemble II can play louder, and they have greater low-bass extension. They also give you tremendous room-placement flexibility, which allows you to optimize performance, with little impact on the decor of your room.

Costly Components. Thoughtful Design.

At the heart of Model Six are its drivers. a 1%" cone tweeter with center %" dome (the same tweeter we use in Ensemble), and a newlydesigned 8" acoustic suspension woofer. While classic in their simplicity, these drivers differ greatly from other moderate-cost speakers.

Model Six's crossover frequency is 2,000 Hz, much lower than many other two-way designs. This makes it possible to ensure smooth, uncolored upper midrange with wide dispersion. Such a low crossover frequency would not work with conventional tweeters. But Model Six's tweeter uses a suspension that allows the "long throws" necessary to reproduce music in this range.

The 8" woofer cone is larger than those usually found in speakers of Model Six's size and price, allowing it to move substantial amounts of air at low frequencies. And Model Six puts emphasis on very low frequencies instead of the mid-bass "rise" common in marry speakers. The result is bass that is more accurate and extended than similar systems.

But most important is how Henry Kloss went on to "voice" the system-painstakingly fine-tuning the octave-to-octave balance. This is the most important factor in determining the overall sound of a speaker.

Elegant Cabinet Design. We devoted considerable time and effort

to making Model Six visually appealing. Convincing simulated wood finishes were chosenin oak, teak and black ash. A subtly rounded "bullnose" molding frames a medium charcoal grev grill that was custom-woven for Model Six.

Factory-Direct Price: \$119 each!

Because we sell factory-direct, Model Six sells for far less than it would cost in stores. At \$119 each, in your choice of three finishes, it is the value in today's loudspeaker market. If you aren't satisfied, you can return Model Six within 30 days for a full refund.

For A Free Catalog, Call 1-800-FOR-HIFI

To Make Loudspeakers.

CAMBRIDGE SOUNDWORKS

154 California St., Suite 102F, Newton MA 02158 1-800-367-4434 Pax: 617-332-9229 Canada: 1-800-525-4434 Outside U.S. or Canada: 617-332-5936 day Sound Horto.

The make is neglected codern to be a supported codern to be a supported codern to be a supported by the support of Cambridge emark of RJU, by. Advers is a codernact of Internation in the support of the support o

CIRCLE NO 6 ON READER SERVICE CARD

NEW PRODUCTS

TWELVE DESIGNS

Twelve Designs' CD Catacombs wall storage system comes in unfinished maple, natural maple (shown), black, solid walnut, and solid cherry. Prices vary according to finish and capacity:

91 discs, \$55 to \$155; 169 discs, \$85 to \$275; 286 discs, \$125 to \$375. Twelve Designs, Dept. SR, 1314 NW Irving, #308, Portland, OR 97209. • Circle 124 on reader service card



▼ JAMO

Jamo's stylish SW 500 system includes a pair of 8½-inch-tall satelilies (shown with ST 52 stands) and a 21-inch-wide bass module that's rated down to 30 Hz. The satelilites' finish is

smoked ash, the subwooler's black-ash-stained wood with a smoked-glass top. Price: \$799. Jamo, Dept SR, 425 Huehl Rd., Bldg. 8, Northbrook, IL 60062. • Circle 126 on resder service card





MONITOR AUDIO

Monitor Audio's 41-inch-tall Studio 50 speaker employs only ceramic-coated-alloy drivers, including two subsenciosed 5'v-inch woofers, and is rated down to 25 Hz. A selection of matched woodveneer linishes is available. Price: \$9,900 a pair. Monitor Audio/Kevro, Dept. 58, P.O. Box 1355, Butfalo, NY 14205.

▶ PYL

Pyérs Nedome car twester is available in the mounting configurations: the 0-21th, for available in the mounting configurations: the 0-21th Available in the work of the CS pairly; the 0-21th/M, with a vivivel base (SSS a pairly; and the 0-C21M, with a third the obsessing, All relative a 1-lisch chemically laminated littles of the obsessing obsessi




BOSTON ACOUSTICS

The Tempo 3.1 is Boston Acoustics' first computer speaker. Only 7½ inches tall, it features magnetic shielding and an amplifier with line-level inputs and outputs and active equalization circuitry built into one speaker. Available in black or gray. Price: \$150 a pair. Boston Acoustics, Dept. SR, 70 Broadway, Lynnfield, MA 01940. • Circle 128 or reader service card







In the theater of the mind, anything is possible. But in Energy's complete home-theater speaker system, only reality counts. Two satellites in front and two behind immerse you in refreshing sound. A dialogue speaker at front and center places you face to face with the actors on the screen. Radical dual subwoofers extend all the way down to 35Hz, the bass enveloping you in sonic swell. This is one heart-pounding ride. Catch it if you can at your Energy showroom.



NEW PRODUCTS

V CHASE TECHNOLOGIES

Chase Technologies' Trio system comprises two 9-inch-tall satellite sneakers and a compact bass module whose built-in 60watt amplifier has volume, bass, and treble controls and line-level inputs. Low-frequency limit is 38 Hz. Price: \$399, Chase Technologies, Dept. SR, 13509 E. Boundary Rd., Suite F. Midlothian, VA 23113. Circle 129 on reader service card



A DZURKO ACQUISTICS

Dzurko Acoustics' 49-inch-tall Shadow speaker is divided into two modules: one containing a soft-dome tweeter and two 5-inch midrance drivers, the other housing two 9-inch woofers in their own subenclosures.

Frequency response is 42 Hz to 20 kHz ±2.5 dB. Standard finish is cherry veneer as shown. Price: \$8,250 a pair. Dzurko, Div. of Audio Concepts, Dept. SR, 981 S. Fourth St., LaCrosse, WI 54601. . Circle 130 on reader service card



The KBA-75 THX power amplifier from Kinerpetics is part of the company's THX-certified High Performance Home Theater series. The high-current, "pure Class A" steren amnlifler is rated to deliver 130 watts per channel into 3 ohms and more

than 400 watts into 2 nhms. Highlights include fan-cooled internal heat sinks and a platinum finish. Price: \$1,995 Kinergetics Research, Dept. SR. 4260 Charter St., Vernon, CA 90058-2596.

. Circle 131 on reader service card

W GO VIDEO

Go Video's Epic GV-3060 combines two four-head VHS Hi-Fi VCR's in one box. It features one-button recording, patented circuitry said to produce copies that are "indistinguishable" from the original, and front-panel camcorder inputs. Price: \$899. Go Video, Dept. SR, 14455 N. Hayden Rd., Suite 219. Scottsdale, AZ 85260-6949. . Dircle 132 on reader service card



A CLADION

Clarion's MDJ474, an in-dash car MD changer that accepts four MiniDiscs without a cartridge, is slated to hit retail shelves in April. Discs are inserted one at a time and held in an internal stocker mechanism. Technical features include 1-bit digital-toanalog converters, an eighttimes-oversampling digital filter.

and a music-buffer memory to minimize gaps in playback that would otherwise occur when rough pavement is encountered. Track-access time is said to be less than one second, Price: \$1,000. Clarion, Dept. SR, 661 W. Redondo Beach Blvd... Gardena, CA 90247.

· Circle 133 on reader service card



rristopher Parkening: The Great scordings • EMI Classics 64630 A.C. rethoven, Missa Solemnis + John Biot retiner conducts this 1991 Gramophone Record of the Year! Archiv 00048 Grieg & Schumann, Piano Con man, BPO/Karajan, DG 00055 Brahms, Symphony No. 2 + Boston SO/ Haidrik, Also Tragic Overture, Philips 00056 Tchaikovsky, 1812 Overture + Gothenburg Orch / Järvi. Marche slav, more. BG 00060 Grieg, Peer Gynt Suites 1 & 2 Sym/Blomstedt London 00074 Stravinsky, Le sacre du Printemps Also Shostakovich 5. Cleveland Orch Magnel Telarc 00081 C

Dvorák, Slavonic Dances (Complete) Katia & Marielle Labèque, duo piano Philips 00091 C Beethoven, "Moonlight" Sonata Maurizio Pollini, piano. DG 00095 Thomas Hampson: American Dream Songs of Stephen Foster, Annel 00285 C Sarah Chang: Début Recital

EMI Classics 00377 Aldo Ciccolini: Satie, Gymnopédies EMI Classics 00380 James Galway: Mozart, The Flute Quartets + RCA 00430 C

The Reiner Sound + With the Chicago SO RCA Living Stereo 00433 Hi-Fi Fiedler + Boston Pops/Arthur Fiedler. RCA Living Stereo 00434 Viadimir Feltsman: Bach, "Goldberg' Variations + MusicMasters 00442

Yuri Temirkanov: Rimsky-Korsakov, Scheherazade + RCA 00653 C The Baltimore Consort: The Art Of The Bawdy Song • A Billboard best selle Warning! Explicit lyrics! Dorian 00657 Ensemble PAN: The Island Of St. Hylarion + New Albion 00696 Van Cliburn: Tchaikovsky, Plano Concerto No. 1; Rachmaninov, Plano Concerto No. 2 + RCA 63527 Cecilia Bartoli: If You Love Me-Aria Antiche + London 00862 C

Handel, Water Music (Complete) Fireworks DG 00865 C Trevor Pinnock: Bach, Chromatic Fantasy & Fugue • Archiv 00960 Jean-Pierre Rampal: Telemann, 12 Fantasies for Solo Flute • Denso 00970 Pierre Boulez: Bartók, The Wooden

Prince + DG 01210 Ute Lemger: Illusions Songs associated with Dietrich & Piat.

London 01214 Nikelaus Harnoncourt: Haydn, The Seven Last Words + Telde: 01222

Audition the world's greatest orchestras with no strings.



10-Day Risk-Free Offer!



Dvorák, Sym. No. 9 "From The New-World" • N.Y. Phil Masur J he Telder. 01223 Sir Charles Mackerras: Delius, Sea Drift Argo 01228 Empire Brass: Class Brass: On The Edge • Telaic 01298 Empire Brass: Music for Organ, Brass & Percussion + With Michael Murray, organ. Sibellus, The Swan of Tuonela + Finlandia, more. Allanta SO/Levi. Telarc 01304 Sir Charles Mackerras: Tchalkovsky, Suites from Swan Lake & The Sleeping auty . Telano 01309 Carol Resemberger: Réverie

Periman: Encores + EMI Classics 01387 Emerson Quartet: American Originals Barber, Quartet Op. 11 (Adagio for Strings) & Nes. DG 01393 Glass, "Low" Symphony + Based on music of Eno & Bowie. Davies conducts. Point 01398

Heavy Classix • Classical music's original thunder! Wagner, more. EMI Classics. 01438 Berg, Violin Concerto + Arno-Sophi Muter, Chicago SO/Levine, DG 01442 The King's Singers: Chanson d'amour Beethoven, "Spring" & "Kreutzer" Senatas • Pinchas Zukerman, Top recommendation — <u>Classic Op</u> RCA 01447 Erich Kunzel: American Plano Classics Telarc 01450 Pavarotti And Friends + London 01451 Franck, Symphony in D Minor + N.Y. Philharmonic/ Masur. Teldec 01454 The Demonic Liszt . Mephisto Waltz, more. Earl Wild, piano. Vanguard 01493 Mendelssohn, Octet + Hausmusik or "authentic" instruments. EMI Classics 01536 Offenbach in America . The Boston ops/Arthur Fiedler. RCA Living Stereo 01546 Katia & Marielle Labèque: Posienc, Concerto For 2 Planos → Philips (6623 Gerard Korsten: Tchalkovsky, Souvenir de Florence + DG 10467 Christopher Hogwood: Vivaldi, Oboe Concertos • L'Osser-Lyre 10574 Nigel Kennedy: Sibelius & Tchalkovsky Violin Concertos + EMI Classics 10741 C

Erich Kunzel: Ein Straussfest Erich Kunzel: Offenbach, Gaité Parisienne + Telarc 10783 Van Cilburn: My Favorite Chopin Potoraise in A-Flat "Heroic," Nocturne in B Op. 62 No. 1, Fantaisie in F Minor, etc. RCA 10998 C Mozart, Piano Concertos 9 & 21 Orff, Carmina Burana + S.F. Sym, Blomsledt. A Grammy® winner! London 15283 Orpheus Chamber Orchestra: Coptand, Appalachian Spring • DG 15302 John Williams: The Very Best Of The Boston Pops + Philips 15319 C Mozart, Eine kleine Nachtmusik + Academy of St. Martin-in-the Fields/Marrines.

Jacqueline Du Pré: Dvorák, Cello Concerto + EMI Classics 15555 Kurt Masur: Liszt, 6 Hungarian Rhapsodies + Philips, 19957 Of Eternal Light . Modern charal worl Musica sacra/Westenburg, Catalyst 15558 Kronos Quartet: Górecki, String Quartets 1&2 + "Excellent." — Gramochons

Glinka Choir: Russia Sings • The Glinka Choir of St. Petersburg, Teldec 15584 Erich Kleiber: Beethoven, Symphony No. "Eroica" + London 20700 Rachmaninov, Piano Concerto No. 3 Kissin, BSD/Otawa, Livel BCA, 24718 C Tavener, The Protecting Veil + Steven Isserlis, 'cello. Gramophone Award winner! Vingin Classics 24864 Tchaikovsky, Sym. No. 6 "Pathétique Dutnit London 25092 C

Maria Graf: Harp Recital . Philips 25103 Debussy, La Mer + Chicago SQ/Solti, Also Prélude à l'après-midi d'un faune. London 25234 C













FIRST CLASS MAIL **PERMIT NO. 5071**



POSTAGE WILL BE PAID BY ADDRESSEE

BMG CLASSICAL MUSIC SERVICE PO BOX 91103 INDIANAPOLIS IN 46209-9360

INTHE UNITED STATES

NECESSARY



Preview the world's greatest symphonies, sonatas, concertos, cantatas...risk-free for 10 days.













Artur Rubinstein: The Last Recital For Israel + Live in Pasaderia, 1975. RCA 25236 C Barber & Shostakovich, Violin Concertos fucts. EMI Classics 25252 Albinoni, Adagio + Orpheus Chamber Orchestra, Pachelbel, more, DG 25270 Ravel, Boléro • Cleveland Orchestra/Dohnányi. Teldec 25380 C Andre Watts: The Chopin Recital EMI Classics 25390 C Legnard Bernstein: Somewhere + With you Stade, Kremer, Hampson et al. DG 25461 C

Christoph von Dohnányi: Dvorák, Slavenic Dances (Complete) James Levine: Mozart, Syms. Nos. 40 & 41 "Jupiter" • DG 25497 Saint-Sains, Symphony No. 3, "Organ Preston, BPO/Clames Levine, DG 25505 Tchalkovsky, Symphony No. 4 + Also Roméo & Juliet Cleveland Orch Massel. Telarc 25539 C

Mozart, Overtures + Academy of St. Martin-in-the-Fields/Marriner. EMI Classics 34267 Cecilia Bartoli: Mozart Arias + With András Schiff, piano, London, 34783 Ellot Fisk: Vivaldi, Guitar Concertos Music-Masters 34799 C Canadian Brass: The Essential Canadian Brass • Philips 35043 Kathleen Battle At Carnegie Hall

Cecilia Bartoli: Rossini Hero Grammy® nominee! London 3512 dori: Bach & Vivaldi, Double Concertos + Philips 35143 Riccardo Muti: Prokofiev, Symphony No. 5

Mozart, Requiem + Leonard Bernstein Offer expires February 28.

No strings.



Giden Kremer: Glass, Vielin Concerto Respighi, Reman Trilogy N.Y.Phil/Singpoli, DG 35381 C Michel Plasson: Honegger, Pacific 231

Bryars, Jesus' Blood Has Never Falled Me Yet + Tom Walts, singer, Point 35356 Mendelssohn, Symphonies 3 "Scottish" & 4 "Italian" + S.F. Sym,/Blomstedt London 40143 C Ivo Pegorelich: Liszt, Sonata in B Minor • DG 43308

Kennedy: Vivaldi. The Four Seasons Sensual Classics → Music to get you in a romantic mood. Warner Bros. 44544 Sequentia: Ancient Music For A Modern Age + RCA 44714 Debussy & Ravel String Quartets + Ysaje Beethoven & Brahms, Violin Concertos Jascha Heifetz, violin, RCA 54208 Segovia: Five Centuries Of The Spanish Guitar • MCA 54277

Frederick Fennell: Sousa, 24 Marches Marcury Living Presence 54637 Alfred Brendel: Beethoven & Schumann Variations + Philips 63939 C Schubert, Symphony No. 9 in C "Great" San Francisco SO/Blomstedt, London 64157 C egovia: The Baroque Guitar

Julianne Baird: Greensleeve A Collection Of English Lute Songs + With Ronn McFarland

Holst, The Planets • Chicago Symphonyl pyine, Fantastic sound! DG: 64373

Rossini, 8 Overtures + Montréal SO/Dutoit. Gershwin, Rhapsody in Blue Chicago SO/L DG 64384 C Levine plays & conducts Sibelius, Symphony No. 2

Osto Phill/Jarsons Plus Valse Triste, more. EMI Classics 64477 James Galway: Greatest Hits RCA 73233 C Pavarotti: Amore • A Biltoard-charting Grieg, Songs • Anne-Solie von Otter.

Gramophone Record of the year! DG 74269

Mario Lanza: The Great Caruso Stephen Kovacevich: Brahms, Plano Concerto No. 1 • EMI Classics 83595 C Riccardo Muli: Tchalkovsky: The Dance Album • EM Classics 92853 Mussergsky, Pictures At An Exhibitio Philadelphia Orch./Muti. Philips 93885 C Leonard Bernstein: Mahler, Symphony No. 9 + DG 01182 ↔

Sir Neville Marriner: Amadeus - Original Soundtrack + Fantasy 01458 & C Paul McCreesh: Venetian Vespers

Start with	0	FREE CDs or cassettes now.
		at half the regular club price within a year
then get	3	more selections of your choice, FREE.
Enjoy	10	CDs or cassettes for the price of 1/2 erg and handling charge is added to each selection.
	N	othing more to buy, ever!

HERE'S HOW TO GET AMERICA'S BEST CLASSICAL MUSIC OFFER! • Free 10-Day Trial. First, choose any 6 CDs (or cassettes) from this ad. Enjoy them for 10 days with no obligation. If

you're not completely satisfied, you may return them at our The 6-1-3 Formula. The 6 CDs or cassettes are FREE if you choose to keep them. You simply agree to buy 1 selection in the same format within a year, at half the requiar Club price (currently \$14.98 and up for CDs; \$8.98 and up for cas You'll then receive your choice of 3 more free. A total of 10 for the price of 1/2. You pay only shipping and handling

 Club Mailings. About every three weeks, you'll receive Encore, the BMG Classical Music Service suide. filed with handreds. "best-choice" recordings, plus a Featured Selection. . If you want the Featured Selection, do nothing, It will be

sent to you automatically. If you prefer an alternate selection or none at all, simply return the Notification Card provided, by the date specified We give you at least 10 days to return the card. If you

should have less time and, as a result, receive an unwonted Featured Selection, you may return it at our expense.

• No long-term commitment required. After you pay for you half-price selection, you may cancel your membership simply by writing to us. Or you can stay on and enjoy the many b efts of membership, such as the convenience of finding the

classical music you want at great savings.

If the repty card is missing, please write to:
BMG Classical Music Service, P.O. Box 91103,
Indianapolis, IN 46291-0025

Dog and hom are trademarks of General Electric Company, USA. The BMG Logo is a trademark of BMG Music. Other trademarks used in the advertisement are the property of various trademark owner BMG Music Service, 6550 E. 30th St., Indianapolis, IN 46219-1194 C1994 BMG Direct



conducts, DG 35231

INSTANT 50% OFF You start out as a Preferred Member

From day one, nautar Club price, you're entitled to buy another one of equal or lesser value at half price. With other clubs usually you must first buy 6 or more at full price to qualify for extra savinos

Start Saving! Mail This Postage-Paid Card Today! Please accept my membership in the BMG Classical Music Service and send my 6 FREE

applied Clab price within a year. I will then receive 3 more choices FREST That's 10 for the price 147, 2480 and part of Apr., and 11 contention that a shipping and handling charge will be titled for each selection. J					
At another second	on Many series when		the same 40 da	. en abitantian	estados e

J Mr.						
) Mrs I Ms.	First Name	6994		Last Harne		(PLEASE PRINT)
ddress					Apt.	
By			State		δp	
elephon	e, please ()				
	Area	Code				

c Designates two-disc sets, which count as two selection Photocopies of this reply card are acceptable: MAIL TO: BMG Classical Music Service, P.O. Box

We reserve the right to request additional information, reject any application, or cancel any membership. Limited to new members. Local taxes, if any, will be added. Other available in continental USA and under special arrangement in Alaska and Hawaii.

(A) DBLE

PERIPHERALS

RODUCTS AND TRENDS

THAT GO BEYOND

MAINSTREAM AUDIO/VIDEO

CD-ROM: Multimedia on a Silver Platter By CARY LU

magine a compact disc that stores not only music but movies, video games, and the contents of hundreds of books, complete with photographs, illustrations, and text. its contents in many new ways—with instantaneous access to broad caterial contents in many new ways—with order to be content of the content o

While most of us know compact disc as a digital storage medium for music. CD's can also be used to store many other kinds of information. Hence, a whole family of computer and computer-like products based on compact discs have become available in just the past couple of years. Some, such as the Compact Disc-Interactive (CD-I) players and the Sega and 3DO game machines, attach to a television set. Then there are CD-ROM drives that interface with a computer; most are outboard modules, but a growing number of computers now include a built-in CD-ROM drive. Think of a CD-ROM drive as a playback-only adjunct to the floppy drives and harddisk drives common to most computers. The difference is, it plays CD-ROM discs (not to be confused with CD-I's or the discs used by TV-based systems like 3DO) that are capable of storing far more data than standard floppies or diskettes. How much more? One floppy can store the contents of an average-size novel, while a CD-ROM can hold 500 novels, or about 300,000 pages of text. What's more, the text is fully searchable, meaning you can find any word or phrase within seconds.

Audio, CD-ROM Style

All CD-ROM drives, except for a few discontinued models, can play ordition to the multimedia CD-ROM discs mentioned earlier. CD-ROM drives usually have only two controls -a disc-eject button and a volume control for a headphone iack. Other controls, such as play, stop, skip, and so forth, are handled by the software, which displays an image that resembles the faceplate of a CD player on the com-

puter screen; a few programs even let you key in track numbers to assemble your own play lists. Most CD-ROM drives have a line-level output in the rear, but the connectors are usually nonstandard (a few drives have rearpanel phono jacks) and often not easily accessible, which is why many people take the "easy" way out and connect the drive to a stereo system via the headphone jack. Nevertheless, a CD-ROM drive isn't really a good replacement for a CD player, even in an office setting, except for background music. For one thing, computer fans are noisy. For another, if the computer's operation is interrupted for any reason, the CD stops playing. Most CD-ROM drives also require the use of a caddy to hold and protect the disc. That's fine for CD-ROM's, but at \$9 a pop it's unlikely that you'll buy a caddy for each music CD you want to play. Besides, caddied discs are a nuisance to load and unload.

Compared with conventional CD players, CD-ROM drives employ faster and more robust mechanisms. Although most people probably don't care whether it takes I or 2 seconds to



NEC's MultiSpin 3Xp and 3Xe triple-speed CD-ROM drives.

go from one music-CD track to another, access time is very important to CD-ROM because you may have to iump around the disc dozens of times within a few seconds to retrieve information. Also, the latest CD-ROM drives can spin the disc faster to increase the data-transfer rate: Doublespeed CD-ROM drives are now common, and triple- and quadruple-speed drives are available. (All of these fast drives slow down to the relatively low speed required to play back a CD audio track on a CD-ROM or an ordinary CD.) CD-ROM drives are still very slow compared with a computer's internal hard-disk drive, however, Even the fastest drives take twenty times longer to find tracks and retrieve data at only one-third the rate of a hard-disk drive.

This relatively slow playback rate limits the quality of any video contained on a CD-ROM, which usually appears in a tiny window in the corner of the computer screen and is accompanied by monaural sound. The motion tends to be jerky, too, recalling a bygone era when "the flicks" really did flicker. Still, even tiny, less-than-

PERIPHERAI S

perfect moving images add a valuable dimension to the information on a CD-ROM.

Sound Quality

Audio is stored on a CD-ROM in one of several ways:

 As standard 16-bit CD audio tracks when the highest quality is desired; 1 minute of 16-bit stereo sound takes up about 10.5 megabytes.

 In low-quality 8-bit monaural form (with low sampling rates) to conserve storage space. Depending on the degree of compression used, 8-bit recording formats require from 0.5 to 2 megabytes of disc space to store 1 minute of audio, allowing more than 10 hours of monaural sound to be stored on a single CD-ROM.

 As a MIDI (Musical Instrument Digital Interface) file with instructions that tell a MIDI playback device which notes to play and how to play them, rather than storing the actual sounds. MIDI files can be played back through a MIDI instrument such as a keyboard (with a suitable MIDI interface), or the computer can synthesize MIDI sounds, provided it has a suitable sound circuit. (A variety of add-on sound cards are available for PC's, but some of them cannot synthesize MIDI sound; Apple Macintosh computers have a built-in sound generator that does not require MIDI-specific circuitry.) MIDI is a very efficient format; a typical minute of MIDI music takes up only 10 kilobytes of disc space (1,024 kilobytes equal 1 megabyte).

To play back 8-bit soundtracks and MIDI files, an IBM PC or compatible computer needs a sound card (built into some newer computers) as well as an interface board for the CD-ROM drive; sometimes the two functions are combined in one board. Either way, installation can be difficult because of many arcane technical details you need to know to properly install one. Also, most CD-ROM software for IBM-type machines requires Microsoft Windows to run. It's much easier to install a CD-ROM drive in a Macintosh because all Macs have resident sound and CD-ROM interface circuitry. For an IBM PC or compatible, prices start at \$200 for a regular-

speed drive (without a sound card) that is designed to be inserted into the computer: outboard drives start at \$400. Multimedia accessory packages that include a CD-ROM drive, a sound card, and a modest pair of powered speakers are also available for \$450 to \$900. For the Macintosh, double-speed drives range from \$325 for an internal drive to \$400 for an external one.

While an ordinary CD player can play the CD-format audio tracks contained on a CD-ROM, it cannot play the 8-bit and MIDI audio tracks mentioned earlier. And no CD players, not even the fancy units with a digital output, can play a CD-ROM's data tracks, because they lack the necessary circuitry and computer interface. Newer CD players automatically mute if you try to play a CD-ROM's data tracks; older players will reproduce the data tracks as shrill noise.

CD-ROM Titles

Many general-interest CD-ROM's are available, ranging from encyclopedias to educational titles. Children's fare, such as the interactive book "Just Grandma and Me" (Broderbund Software) and "Microsoft Dinosaurs," typically sell for \$30 to \$60. Specialized reference titles sell for much more: The Oxford English Dictionary. for example, goes for \$895 (a bargain nevertheless-the print edition costs \$2,750), CD-ROM and multimedia are still relatively new concepts, so many titles are mediocre in terms of design and content. None of the many travel-guide CD-ROM's I've seen, for example, can match even the cheapest paperback guide.

Among the best CD-ROM titles are those that deal with music. Adding a musical accompaniment to related text and images can result in an extremely satisfying multimedia experience.

Microsoft's outstanding "Musical Instruments" (for Mac and PC) lets you hear, see, and read about over two hundred instruments from around the world. You can, for example, compare five different bagpines or browse among African instruments such as the kuge or sistrum.

There are at least a dozen CD-ROM's that explore classical music.

Interactive versions of Beethoven's Ninth Symphony and Stravinsky's The Rite of Spring combine excellent annotations with full CD audio recordings of the music (from Microsoft for PC's, Voyager for Macs), If you have been baffled by modern "serious" music, Morton Subotnick's All My Hummingbirds Have Alibis (Vovager, Mac only) may not win you over but at least it lets you read the composer's intentions while you're listening, which may help put things in perspective.

Pop music CD-ROM's are also beginning to appear. Unfinished segments of "Freak Show," with music by the mysterious San Francisco rock group the Residents, show wildly quirky imagination with sophisticated graphics (Voyager, Mac only). Going back three decades, Voyager's version of A Hard Day's Night (Mac only) contains the entire Beatles film with much supporting material.

For jazz lovers, "The Multimedia History of Jazz" from Compton's NewMedia (PC and Mac) contains the full text of the 1993 book Jazz: From Its Origins to the Present. It also includes TV clips of classic jazz performances and 120 musical examplesunfortunately in MIDI form rather than original recordings.

The Future

CD-ROM technology is going in several directions at once. Recording drives for computers now sell for under \$4,000 and write-once blank discs for \$39 apiece. Such drives can be used to produce CD-ROM or CD audio discs one at a time. New quaddensity CD's can store more than 2 gigabytes of data (a gigabyte is 1,024 megabytes) on one disc-but they're incompatible with all current CD-ROM drives. And then there are the new compression chips that promise full-screen, full-motion images on a CD-ROM with approximately VHS tape quality. By comparison, the audio world seems very stable.

Cary Lu. a former editor of High Technology magazine and now a contributing editor of Macworld, writes about computers and is involved in TV production.

Buy this.



Get a free trunk and glove compartment.

The 3-CD in-dash changer receiver.


Having a multi-disc CD changer in your car has always meant giving uvaluable space in your trunk or glove compartment.

M's sories with a triple play, a three-disc Cb changer receiver that fits smartly into your dashboard to give you everything in car stereo without sacrifice. With the KD-GTP, your yea oit it all. Three Cbs totally out of sight but right at your fingertips, brilliant sound reproduction, JVC quality, and a place to keep your glovers.





After going round and round about how to improve our CD player, it finally hit us.





thas been, perhaps, Adcom's toughest act to follow. The GCD-575 CD Player achieved breakthroughs in musicality unsurpassed by CD players at almost any price. Stereophile writes, "...in the under \$1000 class the Adcom to buy." Stereo Review credits the GCD-575 with "in general pushing the state of the art in digital-disc playback." but the GCD-575 with "in general pushing the state of the art in digital-disc playback." but the GCD-575 with "in general pushing the state of the art in digital-disc playback." but the GCD-575 with "in general pushing the state of the art in digital-disc playback." but the GCD-575 with "in general pushing the state of the art in digital-disc playback." but the GCD-575 with "in general pushing the GCD-575 with "in

So when the engineers at Adcom went back to the drawing board to try to top their latest success, they were hard-pressed to find areas for improvement. The electronics and sound reproduction were already near perfect. And then, Voila! The idea: add a carousel changer.

Round and round she goes.

One disc, superbly reproduced, was a magnificent accomplishment...but five discs mean five times the enjoyment. In typical user-friendly fashion, the Adcom GCD-600 lets you change four discs while one is playing, offers true random capability for one disc or all five, allows direct clockwise or counter-clockwise access for faster searches, and plays 3" discs without an adapter. The standard remote control gives you complete access to all playback features—including variable volume control—from the comfort of your favorite chair.

Class "A" without compromise.

The GCD-600's Class "A" analog audio amplifier section uses very fast, low noise, linear gain semi-conductors. These no-compromise audio circuits — based on the proprietary amps used in Adcom's

GFP-565 preamplifier — more clearly define low-level information for superior resolution and dramatically more musical CD reproduction. You will not find such superb component parts in any other CD player at any price.

The cure for "digititis".

The GCD-600's technically advanced analog and digital circuits and the user-selectable polarity inversion switch are designed to overcome the problems inherent in CD sound. Midrange harshness and glare dramatically reduced. Sound stage imaging is deeper, more focused, more musically natural. The benefits of digital sound are realized, without the accompanying drawbacks.

Take the GCD-600 for a spin.

If you've been searching for a CD player that offers the convenience of a canusel changer and the sonie superiority of high-end single-disc models, take the GCD-600 for a spin at your authorized Adcom dealer. You won't have to go round and round to decide which CD changer gives you the most sound for your money.

*Peter W. Mitchell, Stereophile, Vol. 12 No. 6, June 1989 ** Stereo Review, 1989





Your Worst Nightmare

s chairman of a major corporation that makes audio equipment and recordings, you are no stranger to cataclysm and all upber and the straight of a straight of a straight tridges, you survived the debacle of quadraphonic discs, you swedted through the death throes of the LP and you've been handsomely readed by the remarkable rise of the CD, Where others hesitated and were lost, you have profited. Now, suddenly, you future is gloomy and confused.

Just a month ago, your life was good. CD profits were spiraling upward, and the new DCC and MD formate were off and running. Now the the roof has caved in. Your desk is strewn with as many strategies and charts as a general's in the midst of battle. Your employees are scared—you can see it in their eyes. A few are even openly

talking of MAD. . . In Athens, back in 1989, a group of major audio hardware and software companies agreed not to market any new formats until all had agreed on terms. Now a bunch of companies have announced their intent to launch a consumer-oriented write-once recordable CD format (CD-R) that lets people copy prerecorded CD's digitally and play the copies on conventional CD players. That could blow away the balance of power, upsetting your ability to profit from hardware sales as well as prerecorded-CD sales. Some speculate that CD-R recorders may soon sell for as little as \$950. Sure, you could take part of the profit from that new manufacturing market, but it would be at the expense of your cash cow-the \$9 billion recordedmusic market. CD-R breaks the most important rule: You simply cannot launch a new format that does not add a new music medium.

And CD-R is not the worst of your 22 STEREO REVIEW FEBRUARY 1994 worries. The rumors are already flying about, and it's only a question of time before the public gets wind of it. For years, your hardware labs have been sitting on low-cost erasable-CD (CD-E) technology. The problem of making a fully recordable and erasable CD was solved back in the 1980's. Take a look at a MiniDisc recorder. It plays polycarbonate prerecorded MD's, manufactured alongside full-size CD's, and it records magneto-optical discs as well. The format's small size necessitates the use of data compression, but anyone can see that MD is essentially a CD-E recorder in disguise. Just vank out the data-compression chips, plop in a full-size disc, and you'd have a CD-E recorder that would also play any existing prerecorded CD. The only limitation would be that CD-E discs could not be played on conventional CD players. Not that anyone would care-CD-E machines would still be compatible

with existing CD libraries.

You collapse in your chair, running your fingers through your suddenly graying hair. Clearly, the CD-R an-

MAD isn't a new format; it is Mutually Assured Destruction. When CD-R recorders are cheaper than DCC and MD recorders, those formats will begin to falter. The DCC and MD companies will nervously eve one another, waiting to see who will pull the plug first. Not too fast, because you don't want to lose facebut not too slowly, because enormous profits are at stake. Finally, as sales plummet, one format's plug will be pulled. The owner of the defeated format will have no choice but to go "MAD" by immediately launching a full-blown CD-E format to annihilate both its own floundering erasable format and the competitor's still-surviving erasable format. The only ultimate survivor will be CD-E, and the chance for a new software market, an alternative to conventional CD, will be lost.

Your phones are ringing, vice presidents are pounding on your locked office door, the fax machine is spilling over onto the carpet. You raise your head from your desk. The press releases say the CD-R launch is now officially under way. There is already

You are the chairman of a large audie corporation.


Some of your competitors have just

announced the launch of recordable CD. Now what?

nouncement has started the clock on a time bomb that will blow the entire industry to pieces. Once a few companies launch CD-R, all the major players will have to follow suit-the CD-R market is far too important to miss. When competition sets in, the prices will fall. Suddenly, the DCC and MD formats will seem too expensive. Although they offer erasability and excellent portability, those features will not be enough to counter CD-R's compatibility with existing CD players and literal CD sound quality. And that will bring the industry to the brink of MAD.

talk of CD-E. The analog cassette is clearly terminal. A host of cable, communications, and entertainment corporations want to merge and let the consumer have direct data access, doing away with prerecorded media altogether.

You tried to run an orderly industry, You tried to manage technological evolution wisely. You fought against obsolescence. You tried to protect the consumer, and your shareholders. Now it has come to this: your worst mightmare. You reach over to the corner of your desk, your finger poised over a flashing red button.



Room-Matched Loudspeaker Systems with our famous Convex Diaphragm tweeters.

Sounds Like Life.

CIRCLE NO 52 ON READER SERVICE CA

Proudly made in the U.S.A. 470 Business Hwy. 150 Danville, KY 40422 Tel: (606) 236-8298 Fax: (606) 236-7476 Dealer Inquiries Welcome



Underpowering Speakers

I still haven't got this straight. You have offen suid that it's okay to hook speekers up to an amplifier with greater output than the speekers are raised for, but an autistic that I can severely much sight of a dearmon instits that I can severely much sight to underpower them—with, say, a 60-want amp owering 100-want speekers.

Which is correct?

JAY DUCHARME
EASTHAMPION, MA

It does seem natural to suppose that the more power you put into a speaker, the more picker you put into a speaker, the more likely you are to blow it apart, and that is true in extreme cases. But the rated power capacity of a speaker, however the number may have been arrived at (and methods vary widely), is approximate at best and usually refers to the power the speaker can handle more or less continually over some name of frequencies. For

brief periods, almost all speakers can handle much more, and musical peaks tend to be very brief. Thus, using an amplifier with higher output than the speaker is rated for is unlikely to damage it in normal (nonabusive) operation and has the added benefit of handling peaks cleanly.

When a modest 20-dB musical peak comes along, the demand on the amplifier will suddenly be one hundred times the average power—in the range of 100 watts or possibly more. A 60-watt amplifier may be able to deliver that briefly, but it may not. And it's very unlikely that it could cope

with a 40-dB peak.
When an amplifier runs out of power, it "clips": It chops off the top of the waveform, leaving a type of square wave. By its nature, such a waveform contains high-level high-frequency elements that can be difficult for tweeters to handle. Instead of the fraction of a watt the tweeter is used to

(most of the power is normally absorbed by the woofer), it may receive many times that. An underpowered amplifier usually spends a lot of time clipping, as you try to push it to a saltsying output level, and that can mean trouble for your tweeters. It's true that a higher-wattage amplifier will briefly feed more power to the speaker than a moded one, but it will have the sort of spectral balance the speaker was designed for and may thus be safety.

Video via Receiver

Today's AV receivers provide inputs for video sources such as VCR's and videodisc players. Obviously there are reasons to feed the audio of these components to the receiver, but how about the video signals themselves? Does the receiver enhance the video in some way? If not, what's the advantage in routine video signals.



SHOCKINGLY DEEP BASS. Add our SUB-712 powered subwoofer to your system and you'll be struck by the impact of its low end. Call 1-800-878-TiME.



nals through the receiver rather than feeding them directly to the TV's video inputs? STEVE SWEENEY Houston, TX

It's mainly a matter of switching convenience. When you select between videoassette and videodisc, for instance, you need only hit a button on the receiver or its remote, rather than having to select the audio on the receiver and the video on the TV. It also cuts down on the number of cables. as there need only be a single wire from the receiver to the television, rather than individual wires for each video component-a particular advantage if the TV is at one end of the room and the source components at the other

Also, most A/V receivers provide some on screen indication of what functions have been selected, and this may be useful (although sometimes it gets jumbled up with the source component's own on-screen info, or even that of the TV). As for enhancement, a few receivers do provide some, but of a fairly rudimentary sort; you can always switch it off, however.

Rear Stereo

I understand that the rear speakers in my surround system are useless unless I'm actually watching an encoded movie, so I would like simply to feed the front signal to the rear speakers as well when listening to other sources. Is there a way to install a switch to make the reconnection easier? DEAN FOXWELL Richmond, British Columbia

A simple double-pole, double-throw (DPDT) switch, available for pennies at any electronic-supply store, should do what you want. Make sure it's a "break-before-make" type that disconnects one amplifier before connecting the other; otherwise you will be briefly connecting the front and rear amplifier outputs in parallel, which is not a good thing to do even for a

Before you go to that trouble, however, try listening to some music in the various modes offered by your surround decoder. Far from being "useless" with anything other than encoded material, a surround system can extract sonic information that adds depth to conventional stereo recordings. And even the simplest decoders usually provide at least a rudimentary ambience mode for enhancing music. Give it a listen-it will probably sound a lot better than simply duplicating the stereo signal unmodified in the rear of the room.

CD Wasteland

In my business, I receive a lot of computer programs on CD-ROM. Updates always include the earlier material, so the older discs are not needed anymore. I have been saving these CD-ROM's in the hope that one day there will be a way to record over them with music. Am I wasting my time? MICHAEL PATINELLA Glendale, AZ

I'm afraid there's no good reason to save them, so you might as well pitch them. Although recordable CD does exist, it requires special discs for recording. You are no more likely to be able to overwrite your CD-ROM's than to put new music on your old vinyl LP's. Even MiniDisc. which is recordable, uses very different kinds of discs for home recording and for prerecorded releases. Prerecorded MD's resemble CD's and can't be reused.

Getting the Lowdown

I am considering adding a powered subwoofer, but my main speakers are already rated down to 36 Hz. Would the extra low-frequency speaker provide a significant improvement, or would the change be subtle? JON BUTCHER Waltham, MA

It could go either way, depending on circumstances. For instance, your speakers may indeed produce some output at 36 Hz, but not very much. In that case, a subwoofer might be just the ticket. Or they may be only 3 dB down at that frequency and put out considerable sound even an octave lower (18 Hz), in which case the sub might be unnecessary.

If you think your system is shy on very deep bass (and remember that most music contains little or nothing below about 50 Hz) try a subwoofer, but make sure the dealer will take it back if it doesn't do what you want. Before you trot it back to the store, however, experiment with crossover settings, if possible, and a number of different locations in your listening roomplacement will influence any speaker's low-frequency extension and smoothness to some degree, and in the case of a subwoofer, it will affect the blend with the main speakers as well.

If you have a question about audio, send it to Q&A, Stereo Review 1633 Broadway, New York, NY 10019. Sorry, only questions chosen for publication can be answered

STEREO REVIEW FEBRUARY 1994 25

FREE



Remember when shopping for a stereo was fun? So do we. Get our catalog and get excited again!

- Hundreds of components
- Dozens of top brands
- Packed with buying tips Low discount prices
- ▶ Computers and video, too
- ▶ It's free! Call now. You'll be glad you did.

Call Now! 1-800-955-9009

or mail this coupon

Apr. # CRUTCHFIELD

Address



Terminology Translated

very technical activity has its own jargon, familiar to its practitioners but often meaningless to outsiders. Sometimes a vocabulary is precisely defined as it applies to a particular specialty but may be used more loosely or even incorrectly by people operating outside that field.

For example, consider the matter of amplifier power ratings, which received considerable attention about twenty years ago when the Federal Trade Commission stepped in to control the ridiculously inflated claims being made for the power outputs of many amplifiers and receivers. At the time, it was not uncommon for amplifiers to be rated by combining the nominal continuous power output capability of all channels, doubling that figure (sometimes justified as a "peak power" rating), and adding a bit for emphasis. By this tortured logic, a 30watt-per-channel stereo receiver might be advertised with a "125-watt" rating.

After a series of hearings, the FTC issued a ruling that served to stabilize the wattage war that was rampant in the audio industry. It is now the accepted standard in home audio.

The primary power rating for a supposed to be stated first and most supposed to be stated first and most rently defined as the maximum continuous output that one channel can diverse to a given range of frequencies without too, all specified by the manufacturer and spelled out in the published rating. This allows the performance of the companion of the companion of the performance of the companion of the compani

The FTC's ruling also called for measuring amplifier distortion while driving all channels simultaneously at full rated power into the specified load impedance as well as at lower power levels. Another requirement was that the amplifier be "preconditioned" before measurement by simultaneous operation of all channels at one-third of rated power at 1 kHz for one hour. This step was intended to bring the entire amplifier to its highest

operating temperature. For many years I adhered to the FTC requirements as closely as possible, but the current trend toward morethan-two-channel amplifiers and receivers has made it impractical (and technically unnecessary) to drive all amplifier channels simultaneously to rated power. A surround receiver usually has at least five power amplifiers, which would only very rarely, if ever, be driven to rated power simultaneously while reproducing actual program material. The surround-channel signals in most cases are not in phase with the main channels, so that even if they were driven to rated power, the amplifier would never have to deliver the sum of two or more maximum-signal power outputs at the same instant.

For the same reason, there is no need to bring all channels to a high

pilfer (or one channel of a multichannel ampilfer) that can be specified and measured, plus five more that are peculiar to multichannel ampilfers. Measuring a stereo ampilfer with strict adherence to all the test specimidable and time-consuming process, even with the fast computer-driven test instruments available today. It have no doubt, however, that more reputable manufacturers do just that reputable manufacturers do just that

But as a reviewer I have to look at things from a slightly different viewpoint. The time required to evaluate a product as complex as a modern integrated amplifier or receiver is considerable, and unlike a development engineer, who may devote his working time to a single product for an extended period, I have to divide manning as diverse and constantly changing array of components.

My goal is to sort out a product's pluses and minuses, not so much from the perspective of the manufacturer's engineering staff, but rather from the standpoint of a potential user (not

Twenty years age, an amplifier's rated power might be the combined outputs of all channels, doubled

to arrive at the "peak power," plus a bit for emphasis.

temperature for preconditioning. Most surround receivers get hot enough in normal operation that the preconditioning is effectively accomplished by normal test procedures.

The procedures I follow for testing amplifiers, whether separate components or part of a receiver, are based on EIA (Electronic Industries Association) Standard RS-490, "Standard Test Methods of Measurement for Medio Amplifiers," and generally adhere to its provisions and intent. RS-490 is a comprehensive standard defining some twenty-one different characteristics of a single-channel am-

necessarily technically minded). To this end, I rely on an extensive, but not exclusive, use of laboratory tests, in combination with some decades of experience with electronic instruments and audio components.

In future columns, I will describe in more detail the measurements I make on various products, roughly how they are made, what their results mean, and how they relate to commonly used audio terms. Even readers with virtually no technical knowledge of audio measurements should gain a better understanding of the process and its terminology.

Product of the Year!

THE STUDIO MONITOR

"DOES THE STUDIO MONITOR MEET IT'S GOAL OF KEEPING UP WITH THE BIG GUY, HIGH-END SYSTEMS AT ONLY HALF THE PRICE? YOU BET! CHECK THEM OUT FOR YOURSELF."

"THIS IS A TRUE MONITOR LOUDSPEAKER."

> AUDIOVIDEO INTERNATIONAL GRAND PRIX PRODUCT OF THE YEAR AWARD WINNER



SOUND&VISION CRITIC'S CHOICE AWARD WINNER.



iscover the StudioMonitor's compelling musical ability, superb engineering and refined elegance for yourself.





For more information on the Straton Montroz as well as after five Pur union. speakers trisit your nearest AUTHORIZED PARADIGM DEALER, or write. AUDIOSTREAM, MPO Box 2410, Niggara Falls, NY 14302 In Canada: Ракалисы, 101 Hanlan Rd., Woodbridge, ON L4L 3P5



INSPIRED BY GENIUS.

It is a passion for detail.

A quest to elevate performance beyond even the extraordinary.

It is this inspiration that has produced the unparalleled clarity and richness

of the Sony ES series of ultra high fidelity components.

To honor this same dedication to excellence

in gifted young musicans, Sony has created the "ES Award for Musical Excellence"

in concert with The Juilliard School. For a complimentary brochure

on the ES series, dial 1-800-847-SONY.





TEST REPORTS



RDL Acoustics F-1 and FS-1 Loudspeaker Systems

HIRSCH-HOUCK LABORATORIES

lthough its name is new in the audio world, RDL Acoustics has its roots in the early days of hi-fi. One of its principals, Edgar Villchur, founded Acoustic Research in 1954 and was responsible for such seminal developments as the acoustic-suspension loudspeaker and the dome tweeter. A few years later. Roy Allison went to work at AR, where he was responsible for the design of a number of now-legendary speakers, including the AR-3a and the AR-LST. He also developed a unique tweeter whose convex dome has since become a hallmark of Allison products.

Allison made an intensive study of the interaction between the bass output of a speaker and the adjacent room boundaries that showed how to optimize a system's low-frequency response by establishing a correct relationship between its woofers and the

room boundaries. In 1974 he founded Allison Acoustics to produce a line of speakers based on that research. Now together again, Allison and Villchur have set up RDL (for Room-Designed Loudspeakers) Acoustics.

RDL Acoustics sells its products, as well as complementary electronic products from other manufacturers,

> DIMENSIONS 11 INCHES WIDE, 251/4 inches high,

FIRESH LACQUERED CHERRY AND BLACK

> \$549 A PAIR


MANUFACTURER RDL ACOUSTICS, DEPT. SR. 26 PEARL ST., No. 15. Bellingham, MA 02019: TELEBRONE 1,800,227,0390

directly by telephone or mail, offering a five-year warranty and a thirty-day no-strings-attached return policy if a customer is dissatisfied for any reason. (The company even maintains a computer bulletin board that you can use to obtain information, ask questions, and order by modem.) Each of its speakers is optimized for a specific placement in the room, in accordance with Allison's findings in his research on room-boundary effects.

Since most of the models in the RDL line are designed to give essentially the same, or at least very similar, performance when properly placed, we thought it would be interesting to see how close the company had come to achieving this difficult goal. The largest of the five models currently available are the F-1 and FS-1. In almost every respect, these two speakers are identical, using an 8inch acoustic suspension woofer with a 11/2-inch voice coil and a 1/2-inch linear-excursion capability together with a 1-inch convex-dome tweeter whose 1/2-inch voice coil is damped and cooled by ferrofluid. Both models use a 2-kHz crossover, with 6-dB-per-octave slopes, and have a rated sensitivity of 87 dB sound-pressure level (SPL) at 1 meter with a 2.83-volt input. The nominal system impedance is 8 ohms, with a 5-ohm minimum. The speakers are recommended for use with amplifiers rated between 15

and 150 watts per channel. The F-1 and FS-1 also have the same dimensions, styling, finish, weight, and price. Indeed, there is only one difference between them: The FS-1 is a conventional floorstanding system with both drivers on the front panel and the woofer close to the bottom, whereas the F-1 has its woofer on the top, facing upward. Where the FS-1 has a black wooden top plate, the F-1 has a black removable grille. Both have a removable front grille, plus a special panel section that positions the tweeter about 1/2 inch forward of the front baffle.

The instructions that come with the speakers are specific as to the recom-

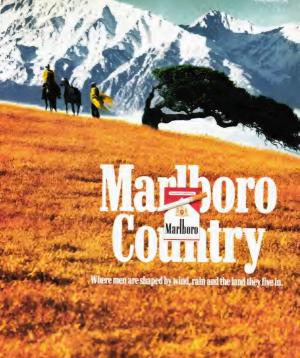

SURGEON GENERAL'S WARNING: Smoking Causes Lung Cancer, Heart Disease, Emphysema, And May Complicate Pregnancy.

TEST REPORTS

mended placement for each model. The FS-1, the more "conventional" of the two, is designed to be placed on the floor well away from any wall. The F-1, on the other hand, must have its back close to a wall but can be at floor level or anywhere above it.

oth speakers are handsomely finished in lacquered cherry, with black cloth grilles. Their input connectors, five-way binding posts, are recessed into the back panel. They are supplied with 50 feet of 16-gauge connecting cable and a wire cutter and stripper for installation, plus a Phillips-head screwdriver that enables the user to replace any driver, should that ever be necessary, without returning the entire speaker to RDL.

We installed the RDL FS-1 and F-1 speakers according to the manufacturer's recommendations. The FS-1's were placed about 6 feet apart, 4 feet from the side walls and about 3 feet in front of the wall behind them. The F-I's were placed on shelves against the wall, 26 inches from the floor and respectively 28 and 44 inches from the side walls. We used these locations to measure the room responses, averaged for the left and right speakers, and we also used them for our listening tests. Other measurements, including quasi-anechoic MLS response and close-miked woofer response, were taken on individual speakers moved to convenient positions.

The averaged room responses of the two RDL speakers were essentially alike, and their woofer responses were absolutely identical (within about 0.5 dB) from 20 Hz to 1.2 kHz. Thus, the composite frequency-response curves for the two were alike for all practical purposes. Unfortunately, this measurement technique, though convenient and capable of giving a good sense of a speaker's potential bass performance, does not give a fully realistic description of its actual performance in any particular room.

Nevertheless, the composite response curves confirmed the speakers' generally excellent performance. Relative to the 1-kHz level, the woofer output was flat within 2 dB down to 150 Hz, rose another 2 dB to its maximum between 60 and 70 Hz. and returned to its 1-kHz level at 45 Hz, falling at 12 dB per octave below that point. In the tweeter range, the output varied only ±2.5 dB from 2 to 20 kHz. But though the average output of the speakers was exceptionally uniform over almost the full range from 45 Hz to 20 kHz, there was a dip of 4 to 5 dB in the octave from 1.1 to 2.2 kHz. The dip showed up in room-response measurements and in the close-miked woofer measurement as well as in several of the MLS measurements, and it seems to be real, although not specifically audible with normal program material. The horizontal dispersion of the Allison-designed tweeter was exceptional, with the response 45 degrees off-axis diverging only slightly from the on-axis response above 4 kHz, by -2 dB at 10 kHz and -8 dB at 20 kHz.

The impedance curves of the two speakers differed only slightly, with bass resonance peaks of 16 or 17 ohms at 52 Hz, an overall maximum of 25 or 27 ohms at 1.5 kHz, and a minimum reading of 7 ohms between 100 and 200 Hz. Sensitivity was 87 dB, as rated. Driven with 4 volts (corresponding to a 90-dB SPL), the woofer distortion was between 0.6 and 1 percent from 60 Hz to beyond 1 kHz, rising at lower frequencies to 2 percent at 50 Hz and 4 percent at 38 Hz. This is exceptional performance for an 8-inch driver in a modest-size enclosure and reflects the heritage of

these speakers.

Equally impressive was the pulse power-handling ability of the F-1 and FS-1 systems. The woofer did not overload audibly with a single-cycle 100-Hz input of some 860 watts (the clipping point of the amplifier into the speaker's 7-ohm impedance at that frequency). The speakers easily withstood pulse inputs of many hundreds of watts at 1 and 10 kHz.

We were most curious to evaluate the sound quality of these two systems, with their different driver configurations but very similar basic performance measurements. On most (but not all) program material, the FS-1 and F-1 systems sounded distinctly different. Most often the F-1's (against the wall) gave a markedly wider spread of sound than the floor-mounted FS-1's. That was not entirely surprising, since the F-1's actually were spaced a couple of feet further apart. The upward-firing orientation of the F-1 woofers may also have been a factor, since presumably that would cause more of the system's midrange output to reach the listener by way of reflections from the walls and ceiling than would be the case with a conventional front-firing driver. On the other hand, the FS-1 system had a distinctly warmer sound, which was not explainable by any of the measurements we were able to make.

hese sound characteristics were not always apparent (as often happens in speaker evaluation, they were program dependent). Sometimes the two systems sounded alike, but more often than not there was no difficulty in identifying which was being heard. We also tried interchanging the speakers, putting the FS-1's against the wall and the F-1's in a free-standing position. They still sounded different, but in a different way. All in all, we pre-

ferred them in their correct locations. It is possible that these effects were simply the result of too little distance between either pair of speakers and a reasonable listening position or of their different heights (floor level vs. about 30 inches off the floor). In the end, we don't think it matters very much, since both of these systems are truly excellent, with a smoothness of response and low distortion that do credit to their lineage. That they do not always sound exactly alike simply reflects a point I have been making for many years: Loudspeakers will always sound different in different rooms or different locations in the same room, even if they have been carefully designed to minimize those differences. In a more optimal room layout, these two might have sounded more similar. Even under the imperfect conditions of our tests, however, the RDL speakers always sounded first-rate, and since the company's sales policy gives you the benefit of an extended at-home audition, we would not hesitate to recommend giving them a try.



Prince—The Hits 1 (Paisley Park) 466-523

Judgment Night* Orig. Soundtrack nortal/Epic) [1 aze Featuring renkle Beverly—Back



The Cranberries verybody Else Is Doing So Why Can't We? 485-559 es Taylor-Live 463-687/393-686

y Toni Toné-Sons Dr. Dre-The Chronic

De La Soul—Buhloone Mindstate (Tommy Boy) 468-963

Another Bad Creation



PLUS A CHANCE TO GET EVEN MORE MUSIC FREE! SOP DETRIES (Gelfen) 485+526 Kenny Loggins—From The Redwoods Donald Fagen Kar kirisd (Reprise) 458

Billy Ray Cyrus-Won't Be The Last 465-385 Bob Dylan—The 30th Anniversary Concert (Giant) Genesia Live: The Way We Walk, Vol.1 Fourplay (Ritenour, Mason, James, East) —Between The Sheets (Wamer Bros.) 464-578 Genesia Live: The Way We Walk, Vol. 2: The Longs (Atlantic) 467<381

D J Jazzy Jeff & Fresh Prince—Code Red (Jive) 467-001

Salgon Kick-Water

Melissa Etheridge— Yes I Am (Island)

Conway Twitty—Final Touches (MCA

rede - BE1 Lan... Party (Giant/Reprise) 465-690

Orig. Snotrik. (Epic 458-430

The O'Jays-Heart-breaker (EMI) 454-495 466-763 Jean Luc Ponty—No Absolute Time (Atlantic) 464-297 Babyface—For The Cool in You (Epic) 454-222

Kris Kross—Us (Aufhouse/Columbia) 463-763 Miles Davis & Quincy Jones-Live At Montreux (Warner B 463-554

MARIAH CAREY

Music Box, Mariah's latest album shot to the top of the charts. Dreamlover; Hero; more. (Columbia) 465-435 MTV Unplugged. Acoustic concert EP w/Lackson 5 classic Pl Se There; plus others. (Columbia) 441-790 Emotions. #1 stle hit; plus
"If The find Of Time: If #8
Over; Can't Let Go and still
more. (Columbia) 428-029 Meriah Cerey, Debut album with I Don't Wanne Cry; All In Your Mind; Alone In Love; more. (Columbia) 407-510



Mark Cheanutt-Almost The Black Crowesdonsymaker (Del Dave Koz-Lucky Man (Capitol) 481-848 Sndtrk. (Epic Soundtrax/ MJJ) 461+731

cury) 423+780/393+785

Roy Orbison—The All-Time Hits, Vols. 1 & 2 (CSP) 377*945

Aaron Neville—The Grand Tour (A&M) You Gonna Go My Way
457-200 (Virgin) 456-782 Inner Circle—Bad Boys (Big Beat/Mtantic) 458-610 In Utero. Serve The Servants;

> 455-550 Ten Summoner's *4Mn 454-561 Sting-Ten St Tales (A&M) AC/DC—Live (ATCO) 453-217 lade Love Deluxe Epic) 449-439

448-142 Unplugged (Reprise/Duck) 446+187 Alice In Chains—Dirl 445-833 (Columbia)

Van Morrison-Moondange (Wa

0 442-0 Bros.) (Epic/Assoc.) CLASSIC ROCK



450-353 Bell Bly DeVoe-Hootie Mack (MCA) 450-312





ORE OF TODAY'S BEST MUSIC

Robert Plant-Face Of

Nations (Es Paranza) #59-024

Anthrax—Sound Of

Dave Grusin—Homago To Duke (GRP) 458-47

458-489

459-406

457*192

White Noise (Flekt

Diane Schuur-I 450-323

oby Keith-(Merc 459-315

Jeff Lorber-Worth

Intro (Atlantic) 458-091

Yanni-In My Time (Private Music) 458-018

Luther Vandross--Never Let Me Go (Epic/ LV Records) 457*176

(Reprise)

hris Issak

Primus-Pork Soda

David Bowne bowie (Rykodisc) 412-247 John Lennon Collec-tion (Capitol) 405-308 Lynyrd Skynyrd— Skynyrd's Innyrds/Grt. Hits (MCA) 381+129 485-97 Grateful Dead Skele-tons From The Closet Hits 1969-79 (Polydor) 430-439 (Warner Bros.) 378-406 The Byrds-20 Essential Tracks 1965/1990 The Very Best Of The Columbia/Legacy) 426-940 Righteous Brothers— Unchained Melody (Verve) 423-772 Fleetwood Mac-Grt. 375-782

> Marvin Gaye's Grt. Hits (Motown) 367-565 Porno For Pyros

wight Yoakam—This ime (Reprise) 456-913



Best Of The Doobles (Warner Bros.) 291-278 A Decade Of Steely Dan (MCA) 341-073 The Care Greatest Hits Engles—Hotel C nia (Asytum) Hell (Epic) 279+13 Jim Croce Photo graphs & Memories: Grt. Hits (Seja) 246-868 Boston (Epic) 269-209 James Taylor's Grt. Simon & Garfunkei's Joe Henderson—So Near, So Far (Verve) #55-535

Shel—If I Ever Fall in Love (Gasoline Alley/ MCA) 4534324 Faith (Jamboo/Mero 451-310 Rage Against The Machine (Epic/ Associated) Ell 451-138

lie Cole-Take A (Elektra) 460-741

Entertaining America...One Person at a Time.® MORE SELECTIONS

ooks & Dunn-Hard

vement (Columbia) 453-910/393-914













nley Clarke-Fast ive (Epic) hil Collins-Serous Hits. Live (Atlant 448-944 Believe In You (MCA)

10,000 Maniacs-Our

Noria Estefan-Gri

Guns N' Roses-Use our litusion II (G G 442-038

Billy Ray Cyrus—Some Gave All (Mercury) 441-451 lary Chapin Carpenter —Come On, Come (Columbis) 440 440+560 Nell Dismond—Gri Hits 1956-92 (Columbia) 439-778/399-774 ob James & Earl

439-232 rate Rallroad 439-158 (Atlanto) Jon Secada (SBK) 438-184 ZZ Top—Grt. Hits (Warner Bros.) 438-010 Arrested Development

3 Years, 5 Months & 2 Days (Chrysalis 438-204

end Beyond 447-524 Best Of Count Basie (Roulette Jazz) 435-990 alking Heads onna Judd-1992 (Sire/Warner Bros.) 445-841/395-848 435-906 Michael Bolton— Timeless (The Clas 445-49 Ugly Kid Joe

448-522

448+506 The Very

Mercury) 445-375 Kenny Rogers Hits (Reprise) 444-489 442-251 Brian McKnight 442-236 ins N' Roses-Use

445+510

En Vogue Funky Divas (eastwest) 435-750 k.d. lang-Ingenue (Sire/Warner Bros.)

with two numbers contain 2 CDs and count as 2—so write in both numbers

Broadway, Some Enchanted Evening: etc.(Columbia)461*988 PLUS A CHANCE TO GET EVEN MORE MUSIC FREE!

The Best (Capitol)
433-342 nya-Shepherd Moons (sprise) 431•718

Frank Sinatra—Sinatra Reprise/The Very Good Years (Reprise) 430+363 Stevie Ray Vaughan & Double Trouble—Tho Sky is Crying (Epic) 429-258

ed Hot Chill Peppers -Blood Sugar Sex lagik (Warner Bros.) 428-361 Ozzy Osbourne
More Tears (Epic/
428-128 Barry White—Grt. Hits Combined 428-102 ublic Enemy-

m/Columbia) [3] 428-003 tom Of The John Cougar— American Fool (Rin nnie Reitt-Luck Of

423-186 Van Halen—For Unlaw-ful Carnel Knowledge (Warner Bros.) 420•273 Madonna—The Immaculate Collection 05.) 414-557

COLUMBIA HOUSE, 1400 N. Fruitridge

Ave., P.O. Box 1129, Terre Haute, IN 47811-1129

icit lyrics which may be objectionable to sor

highharmony (M 424-754 411+587

man (Reprise) Janet Jackson Rhythr (A&M) 388-918 Don Henley The End 383-602 alis) 382-036

Patsy Cline—Grt. Hits (MCA) 365-924

uns N' Roses Appette For I (Geffen) New Edition-Vol. 1 (MCA) 359-984 Valuation (Tommy Boy) (3) 429-991 U2-The Joshua 354-449 The Police—Every Breath You Take-The Singles (A&M) 348-318 Bob Marley & The Wallers-Legend (Tulf Gong/Island) 337-857

ruce Springsteen Ichael Jackson 318-08 AC/DC Back In Black Rickie Lee Jones (Geffen)

BILLY JOEL

Plane Of Present His lates #1 album! Title cut; No Man's: Land; Blonde Over Blue; The Great Wall of China; plus more. (Columbia) #83-995 Greatest Hits, Vol. 1 & 2. Just The Way You Are: Uptown Girt; She's Got A Way; many more! (Columbia) 336-396/396-390 Storm Front. Shameless; I Go To Extremes: And So II Goes: 387-902 The Stranger. She's Always A Women; Just The Way You An others. (Columbia) 277-46



362+541

Est The Rich; Livin On The Of Home; I Wonder; Soak The Edge; etc. (Getten) 458-075 Sin; more. (Capitol) 447-995

Branford Mars Ravel: Bolero; Pavane Sym. (Erato)

438-99

Grt. Hits, 430-066

Paul Simon-Graceland (Warner Bros.) 345-751 Dr. Hook's Grt. Hits 317-49 Gordon Lightfoot Pearl Jam-Ten (E

Tracy Law (Atlame) Best Of Joe Cocker 455/790 Blik-Lose C Kela/Elektra Tongue 454-926 Duran Dura (Capitol)

uciano Pavarotti-more (London) 455-022

455-01

Cecilia Bartol

Classical ean-Pierre Rampal-valdi: Four Seasons

(Sony Classical) 481475 Beethoven: Violin

Leonard Berns 455-147 Classics) Kingsley (Philips) 455-09

Viadimir Horowitzawn Upshaw, sop

The King And I'-

423-418 Yo-Yo Ma/Bobby Kathleen Battle-At 432v930 8 CDs, plus \$1.85 to cover shipping and handling).

455-04 HERE'S HOW TO GET 8 CDs FOR 1¢... the coupon with check or money order for \$1.86 (that's 1¢ for your

 You agree to buy just six more selections in the next three years, at regular Club priose currently \$12,98 to \$16.98 and you may cancel membership at any time after doing so. (A shipping and handing charge will be added to each shipment) . Free Music Magazine sent every four weeks (up to 13 times a year), describing the Regular Selection for your listening interest, plus hundreds of alternates. And Special Selection mailings up to six times a year (total of up to 19 buying opportunities). . Buy only what you want! If you want the Regular or Special Selection, nothing—it will be sent automatically. If you'd prefer an alternate selection, or none at all, just mail the response card always provided by the date specified.

. You always have 10 days to decide; if not, you may return the Selection at our · New "Buy More - Pay Less" Bonus Plan. If you continue your membership after thilling your obligation, you'll be eligible for our morey-awing bonus plan. It lets you get a single CD for as little as \$3.99 (or a single cassette free) for each CD you buy at regular Cbb price. . 10-Day Risk-Free Trial. We'll send details of the Club's operation with

introductory package. If not satisfied, return everything within 10 days for a full refund and no further obligation · Extra Bonus Offer: you may take one additional CD right now at the super-k price of only \$6.95—and you are then entitled to take an extra CD as a bonue, FREE! And you'll receive your discounted CD and your bonus CD with your 8 introductory selections—10 CDs in all



Entertaining America... One Person

Rush me these

CDs woll me in the Club unde der lot \$1.85 (halfs 1e for ny latt 8 CDs, plus \$1.85 sho-ng and handing). I agree to buy 6 CDs, at regular Cub tions, in the next these years—and may cancel mamber-tions, in the next these years—and may cancel mamber.

Bonus Also send this CD now: I've onclosed an additional \$6.96

CHECK ONLY ONE) The music

Mr. Mrs.				Age
Mes	Print First Name	Pitial	Last Name	
Address				Apt
				_

Do you have a telephone? (1) \(\begin{array}{l} \text{Disc } \\ \text{Disc } \text RWC-8F-RN

© 1994, The Columbia House Co



Nakamichi MB-4s MusicBank Compact Disc Changer

akamichi's MusicBank CD changers, introduced several vears ago, have a unique mechanical design that enables a multidisc changer mechanism to be built into a cabinet of normal dimensions. The disc loading slot and drawer appear and operate like those of any conventional single-disc player. But after a disc is placed in the drawer and loaded, the drawer can be opened again (even while a CD is playing) to receive another disc, up to a total of seven.

The new line of Nakamichi MusicBank CD players consists of four models, varying in refinement and priced accordingly from \$349 to \$1,200. The least expensive of the group, the MB-4s, uses dual 16-bit digital-to-analog (D/A) converters with four-times-oversampling digital filters (the other models use 18- or 20-bit converters and eight-timesoversampling filters). Although some of their performance specifications differ, all of these players should be capable of delivering excellent sound

Apart from its disc-changing capability, the MB-4s is a relatively barebones CD player. The front panel is almost starkly simple, with buttons for forward and reverse fast scan and track skipping, play, stop, and pause. A row of seven buttons provides direct access to any disc, and an adjacent larger button opens and closes the disc drawer. There are no control knobs. A modest display window provides

the usual information on disc and

The power switch and disc drawer occupy the left portion of the panel. The rear apron is even simpler, containing only the two audio output jacks. In spite of its spare appearance, the

track numbers, plus indicators for the individual MusicBank slots that light when the corresponding slot is filled.

Nakamichi MB-4s provides most of the programming versatility found in other modern CD players. The programming features can be operated only via the supplied wireless remote control, however. This compact handset, less than half the size of typical remote controls, duplicates the frontpanel disc-transport controls and offers direct numerical access to tracks. Discs are selected by means of a pair of buttons that step sequentially up and down the MusicBank stack.

The MB-4s's programming system enables playback of as many as fifty tracks in any order from any combination of the seven discs. The entire programmed sequence can be repeated indefinitely, as can the normal disc sequence. The tracks on all discs can be played randomly, and this mode can be extended indefinitely (with a newly randomized sequence after each completion of the loaded discs).

Nakamichi advises that the MusicBank units will accept 3-inch CD's (very rare in this country, anyway) only in Disc Position 1. Attempting to

DIMENSIONS 16% inches wide, 3% inches high 10% inches deen PRICE

NAKAMICHI AMERICA CORP., DEPT. SR, 19701 S. VERMONT AVE., TORRANCE, CA 90502

use one in any other slot can cause jamming, with possible damage to disc and player. Accessory "disc sta-

bilizers' are also not recommended. The Nakamich iME-18 was as easy to use as any convention il imE-18 was as easy to use as any conventional single-plan machine (easier than most, in fact), thanks to its simple and obvious panel design. The instruction booklet (only five pages) provides all necessary operating information for the four models in this series of players. We had to study the part dealing with programming the player, but the actual process was straightforward and simple.

was stangittorward ano simple.

The MB-48's measured performance, which conformed closely to the measurement data provided by Nakamichi, was not as advanced as that claimed for its more expensive siblings (or many other more convenional CD players). But our results—which are still quite good—are consistent with what was clearly. Nakamichi's design goal for the MB-4s, to bring the convenience of the MusicBank system to a price range affordable by a much larger number of fordable by a much larger number of

people.

Typically, the MB-4s's distortion ratings were about an order of magnitude greater, its noise ratings about 10 dB greater, and its channel-separation ratings about 12 to 22 dB less than the corresponding ratings for the three higher-priced MusicBank models, two of which also have digital outputs and headphone jacks. Otherwise, the four changers are similar in operation.

When judging these CD players, it is well to consider the performance attained by the most expensive and refined record players, tape decks, or tuners offered to the audio consumer market. The fact is that almost any decent CD player is so far superior to most of the other electronic components and to many of the available recordings and broadcasts that there is a tendency to look down on one that has a signal-to-noise ratio (S/N) as "poor" as 87 dB, distortion as "high" as 0.035 percent, or channel separation of "only" 78 dB-all much better than what one could expect from consumer hi-fi components of the analog era. My point is that the MB-4s sounds about as good as any other



. FASHDEMENTS

٨	Maximum output level1.86 volts
	requency response
	20 Hz to 20 kHz +0.03, -0.4 dB
	hannel separation
ı	00 Hz
1	kHz78 dB
2	0 kHz
S	ignal-to-noise ratio
0	A-wtd., L/R)85.6/90 dB
E	lynamic range (L/R)87.3/89.4 dB
¢	Quantization noise (L/R)82/87 dB
E	histortion (THD+N)
ı	kHz (-70 to 0 dB)0.008 to 0.028%
2	0 Hz to 20 kHz (0 dB)0.035 to 0.8%
L	inearity error (at -90 dB)+3.6 dB
٨	Max. interchannel phase shift+1"
c	lefect tracking
0	Pierre Verany #2 test disc)750 µm
c	lise-change time
h	mpact resistance
10	эрА
8	ides B

high-quality CD player, regardless of price or technical sophistication, and is considerably more versatile and easy to use than most of them. If you think you can hear a difference between it and some other model, ask yourself how much that difference really matters to you.

Overall, the MB-4s gives you a lot more than it sacrifices in respect to utility, ease of operation, and appearance. The MusicBank is unquestionably the easiest-to-use, most intuitive CD-changer mechanism that I have encountered, and its realization in a relatively low-price player is a note-worthy achievement.

Definitive Technology Authorized Dealers

As bother framework promoted forwarding and a consecutive content of the dark distinguishment of the consecutive content of the c

18. South Studies Doren Newski, Meningdon E. Associate South Writer Plant Andio Chir P. Lauderdak Audio Video Talebassee Audio Talebassee Audio Video Vi

Custom AM: Cadar Rapider Hewkeye: Iowa City, Cedar Falls

[]- Good Ear: Soies.

[]- United Audio Centera: Chicago & Suburbs- Cars & Starr
or: Rockfort- Jon's Norm Center: Calvoy- Stereo Studio:
Palatines-Select Sound: Naperviller Starling Elect.: Sterling:
Sundown One: Springfield.

[]- Question audio: Criticalite, Inchangedia.

KS: Accent Sound: Overländ Park Advance Audio: Wich Audio Junisides, Juniside (20); XX: Overläne Audio: Lessypiet, Losioville, LE: Alterman Audio: New Orleans, Metalán, Covingion-LE: Alterman Audio: New Orleans, Metalán, Covingion-Jan Goodwine Audio: Boston, Streesbury: Nantucket Sound-Hyanine, Miller Boston, Streesbury: Nantucket Sound-Hyanine Carriago Hose, Silv. Elector (20); Sound-Elect. Caudio-Harian Cytampo Hose, Silv. Elector (27); Sour

Elec. Camberland-Gramsphone: Balt, Elecot Cly-Soursage Balt Sound Studio: Salisbury:

ME Praces Central, Toyo Classical Jazz Holand-Front
AV-Finth-Father Sound Yopkarth Court St. Ustening
Room: Moland, Saginas.

MC Dispersion Averages: Mylona-Audio Particillor. Minnaud
MC Brogenstein AV. Nobelproches St. Central St. Ustening
St. St. Court St.

Tri City Elect.: Convert
MC Preteion Audio Crand Forks.
MLF Castom Electronics: Onabe, Lincoln.
MLF Castom Electronics: Onabe, Lincoln.
MLF Castom Electronics: Onabe, Lincoln.
MLF Castom Electronics: National Market. Notificion. Salem, S.
MLF Mail Science. Tentino Sound Waves. Notificio: Salemanna Charry File Woodbridge Starrec: W. Caldwell. W.

URL West Coast Sound: Abuquerque, Santa Fe.
NV: Upper Ear Las Yegas.
NY: Upper Ear Las Yegas.
NY: Audio Breakthroughe: Manhassee Audio Den: Lake
Gitowe Audio Expressions: Newburgh Chemung Elect;
Corring, Elmina-Clurk Music, Mahny, Synosses-Stereo E:
change Marrhattan, Nanuel-Hart Elect. Vestal: Innovalida
Audio Produkter Listalein Boom Scanstons, James Comment

Rochester Sound Mill: ME. Kisco, Yorkfown His. • S Shop: Amherst, Butkio. QK: K Labs Premium Audio: Tulsa. QK: Audio Craft: Abron, Cleveland, Mayfeld His., Audio Etc. Dayton-Speaker Shop: N. Lima. QB: Bredford's HIFE Eugene-Chalese AV. Ports

P.J. CM I States: Lancaster Hart Electronics: Balonly, Kingston-Litering Post: Pittipurgh & suburge Sassaffare: Brym Mortgomerysie, Whitehall-Stareoland: Nationa Heighter Studio One: Ein. B): Eastern Audio: Notth Providence. SC: Dashboard: Charleston-Upstaire Audio: Columbia, ITA: HI FI Buys: Nastwider-Lindage Ward Knowlie Moder Masic: Namphies New Ware Elect. Januario Sound Room

einer Bjorn'is: San Antonio Don'is HEF Amarillo High Fide y Lurbock Home Enterfalment Dulias: Houstor Marein Electronics: FL Worth-Sound Towns: Teadstra. UT-Audio Works: Salt Lako Chy-Stokes Bros: Logan. UA-Audio Associates: Antonio, Fartax-Audiotronics: Poanotes-Digital Sci. Vs. Both-Stereotypes: Charlotteswile VT-Audio Videa Authorius: Sudiotronics:

VIT-Audio Video Authority: S. Bullings Chainclisswii WA. Audio Wares. Evenit- Definitive Audio. Bellinne, Se tor DESCO Electroniste. Olympia: Evergizen Audio. Sirecular Pacific Sight & Sound. Wenatcher-Sound Mart. Spolkare: Tin Ear. Kennewick.

> Resource and a system. Sheolygam Audio Emportis Melautee. serio Bigo-Precision Audio: Rio Piedras. grada Advance Electronica: Winnipery Audio Ctr.: Monto Olitava, Cubabo Chyr Bay Boor. Toctorio Digital Dynam in Cleatrook B.C.+ Great West Audio: Lonoon Peak Audio

Definitive Technology

"Bipolar Systems are as Close as We've Come to Finding the Holy Grail of Home Theater."

– Video Magazine

Experience the Miracle of Bipolar Technology with Definitive's Revolutionary BP8,10 & 20!

"Truly Outstanding"

— Stereo Review

Experts agree that Definitive's revolutionary bipolar BP8, BP10 and BP20 are three of the world's finest speakers and are sonically superior to any conventional

speaker regardless of cost. These American-made, advanced technology bipolar (front and rear radiating) systems combine lush spacious soundstaging, lifelike depth-olfield, razor-sharp resolution and pinpoint 3-D imaging with powerful subwooter-like bass (to below 20 Hz), high efficiency, wide dynamic range and easy-to-position consumerse. The dramatorie reproduction so real that it has been called. "3- sonic miracle!"



The Ultimate Home Theater Combine the BP8s,10s, or 20s with our C/L/R 1000 or C1 cen-

with our C/L/R 1000 or C1 center channel and BP2 bipolar surround speakers for the ultimate in home theater sound. Visit your nearest Definitive

dealer and experience the absolute sonic superiority of these truly extraordinary ViVA Gold Product-of-the-Year, Audio Video Grand Prix and CES Design & Engineering Award winning loudspeakers.

Definitive's remarkable new PowerField™ 1500 250-watt powered 15" subwoofer is now available (\$995).

Definitive Technology®

11105 Valley Heights Drive • Bultimore, MD 21117 See dealer list on facing page (410) 363-7148

CIRCLE NO 15 ON READER SERVICE CARD



Onkvo T-450RDS AM/FM Tuner

JULIAN HIRSCH . HIRSCH-HOUCK LABORATORIES

he moderately priced Onkyo T-450RDS AM/FM tuner is the first we have tested that is designed to work with the Radio Broadcast Data System (RBDS, or, more familiarly, RDS), the North American version of the RDS system already in wide use in Europe. RDS enables transmission of additional information on an FM carrier, simultaneously with the program, which can then be picked up and displayed by an RDS-aware receiver tuned to that station. For example, RDS can show the category of the current program (such as news. sports, jazz, classical, and so forth) or display test or alert announcements. The T-450RDS supports the following RDS information categories: the station call letters, program category, traffic information, frequencies of stations carrying the same program in a given area, scrolling text (when the information requires more than an ab-

breviated fixed display), the time, and emergency alert warnings. RDS also enables the tuner to scan for stations broadcasting a particular category of programming or to choose for best reception among several stations transmitting the same category.

The T-450RDS provides a number of other convenience features as well. including several station-tuning modes and a thirty-station preset memory (for both FM and AM bands). Its auto-tuning system can, at the touch of a button, scan and memo-

> DIMENSIONS 8 INCHES WIDE, 31/2 inches high

> >

ONKYO, DEPT. SR. 200 WILLIAMS DR. RAMSEY, NI 07446

rize for instant recall the frequencies of the twenty strongest receivable FM stations. You can also program each preset with the call letters of the station assigned to it, which will then be displayed whenever you select that preset, Onkyo's Classified Memory system enables you to assign each preset to any of six groups, identified as Class A through Class F, which can be used to categorize the presets and scan by type of programming, for ex-

On the right side of the front panel is a large tuning knob, which turns with an impressively smooth feel. It has two operating modes. In one, it works much like the tuning knob of an analog tuner, moving from channel to channel as you turn it, clockwise going up in frequency, counter-clockwise going down. In the other, a slight turn of the knob either way initiates a scan, stopping on the next receivable signal found in that direction.

The T-450RDS has a feature that Onkyo calls Automatic Precision Reception (APR), which chooses wide or narrow IF (intermediate-frequency) bandwidth and mono or stereo operation based on the signal conditions.

Definitive's Award-Winning Center Channels and Bipolar Surround Speakers for Your Ultimate Home Theater

Absolute sonic superiority and unequalled value make Definitive loudspeakers your obvious choice.



CL.R 1000 - 8150 ca.

The C/L/R 1000, the world's finest center, is also a superb left and right main speaker high definition articulate clarity and Voted #1 for Quality &

Enthusiasts and world renowned experts acknowledge the dramatic sonic superiority of Definitive loudspeakers for both the superb reproduction of music and the dramatic special effects and dialogue of home theater surround sound.

World's Finest Center Channel Speakers

Optimum surround sound reproduction places heavy demands on the center speaker, the most important speaker because it handles 50% or more of the program material. It is no place to settle for second best. Definitive's C/L/R 1000 and C1 are the finest shielded, low profile, high resolution center channel/main speakers available. They use superior state-of-the-art components and technology for extraordinary ultra

high power handling (C/L/R 1000: 300 watts, C1: 200 watts).

The BP2's Bipolar Advantage BP2s are unique ultra compact

BY2s are unique ultra compact high resolution bipolar (front and rear radiating) systems intended primarily for use on the rear/side surround channels of the finest surround channels of the finest home theater systems. Experts agree that Definitive's bipolars provide a perfectly diffuse sound source which is ideal for these anoitications.

The use of BPZs results in a much more lifelike, dramatic all-enveloping listening experience than is possible with conventional speakers. In addition, because of their superb performance characteristics, the BPZs also make exceptional main channel speakers.

ORDER SOLD SOUR SECRET SERVER CARD

Voted #1 for Quality & Reliability

Definitive speakers are consistently top-rated and were chosen by experts in Stereo Review for their home theater "Dream System." A survey of U.S. cealers voted Definitive speakers #1 for quality and reliability among all speakers sold in the U.S.!
Visit your pearest Definitive

visit your nearest Dennitive dealer today and hear why our superior sounding loudspeakers have won the industry's most prestigious honors, including the CES Design & Engineering Award, Video Magazine's ViVA Gold Product of the Year Award and the AudioVideo Grand Prix.

Definitive Technology
11105 Valley Heights Dr. • Baltimore, MD 21117
See dealer list on page 34 (410) 363-7148

Normally, a strong stereo signal that is free of interference will be received in stereo with the wide IF bandwidth. If there is interference from an adjacent channel, the APR system switches the tuner to its narrow IF bandwidth for greater selectivity. If the signal is too noisy for proper reception (or if it is broadcast in mono), the tuner automatically switches to mono. These characteristics can also be set manually, but the APR system is designed to always give the best reception possible.

The T-450RDS's front panel has small buttons for such functions as direct frequency input, IF-bandwidth selection, stereo/mono switching, muting, band selection (AM or FM), and tuning mode. Larger buttons below the display window in the center of the panel call up the programmed classes of channels, and others control the RDS functions. The display window shows the tuner's complete operating status, including any RDS infor-

mation that may be receivable. On the tuner's rear apron are a 75ohm FM antenna jack, spring clips for connecting the supplied AM loop antenna, audio outputs, and jacks for connection to other compatible Onkyo components for system operation from a single remote control (the tuner does not come with a remote).

All of the tuner's programming functions worked well in our tests, and the APR system operated reliably and unobtrusively. Some stations triggered selection of the narrow IF handwidth, but most were received in the wide mode. The stereo threshold (the signal strength required to switch the tuner from mono to stereo) was fixed at 28 dBf-high enough to insure reasonably quiet and listenable stereo reception.

Our laboratory measurements dramatically demonstrated the considerable difference that the IF-bandwidth selection made in the tuner's FM performance. Switching from wide to narrow IF bandwidth greatly increased adjacent-channel selectivity. from a fairly typical 7.3 dB to 30 dB (the highest we have ever measured). Such high selectivity can be valuable when you are attempting to receive a distant station close in frequency to a

MEASUREMENTS

All figures are for FM only except frequency response; "wide/narrow" refers to IF bandwidth

50-dB quieting sensitivity mono (wide/narrow) 19/17 dBf stereo (wide/narrow). 40 3/37 //RF Signal-to-noise ratio (at 65 dBf) mono (wide/narrow). 79/79.3 dB

stereo (wide/sarrow). 71/71.5 dB Distortion (THD+N at 65 dBf) mono (wide/narrow) 0.105/0.28% stereo (wide/narrow). .0.115/0.65%

Conture ratio (at 65 dBf) wide/narrow 1.6/10.8 dB AM rejection (at 65 dBf)

wide/narrow 62/66 AB Selectivity alternate-channel (wide/narrow)....65/84 dB adjacent-channel (wide/narrow) ...7.3/30 dB

Pilot-carrier leakage 10 PH--75 dB 38-kHz none detectable Hum none detectable (<-85 dB) Channel separation

100 Hz (wide/narrow) 32/23 dB 1 kHz (wide/narrow) 40/27 5 4B 10 kHz (wide/narrow) 32.5/30 dB FM 30 Hz to 15 kHz +1.3. -0 dB

-6 dB at 110 Hz and 2 kHz

AM

local one. As we would expect, some other performance characteristics suffered from the change, which is why the tuner uses the wide mode whenever it can without suffering interference from adjacent-channel stations. Capture ratio, in particular, went from very good in the wide IF-bandwidth mode to poor in the narrow. Other measurements were good or better, and it is noteworthy that the powerline hum in the tuner output was (for the first time in our experience) too low to detect, let alone measure, AM performance was much like that of almost every other tuner we have tested, with perhaps more restricted frequency response than most

At the time of our tests, only one FM station in our reception area was transmitting RDS information, which appeared in the tuner's display window a few seconds after the station was tuned in. We hope RDS comes into wide use, since it offers significant benefits; if it does, the T-450RDS is ready to take advantage of them

Overall, the Onkyo T-450RDS is a very fine tuner. Most of its features truly enhance its listening performance and ease of use. Best of all, this combination of performance and features is available for a very affordable price.



"Oh, that's nice, dear. My first husband Noel's preamplifier had oxygen-free-copper Litz wire."

NOT ALL100 DISC CHANGERS COME IN

EXTRA ARGE

The new JVC XL-MC100 Disc Changer's two-piece design ofters innitiess placement flexibility, writile the rack busting dimensions of evert large one-piece units. Just place the XL-MC100's Transport/Storage unit where convenient, while the Controller comfortably fils into your existing estup.

The system is packed with JVC's latest cutting-edge technology and features, such as 1-Bit DIA conversion and a wide range of programming functions including instant access to

any disc or track and multiple disc classification by file. And JVC's smart, alphanumeric remote control always remembers the exact location of each disc—even when you forget.

The JVC XL-MC100 is also the only 100 Disc Changer that comes with a bound CD Booklet with sleeves for cataloging liner notes, giving you a handy visual

giving you a handy visual reference for finding your favorite music. The XL-MC100: At JVC, "XL" doesn't stand for "extra-large."



The XL-MC100 CD Controller is a standard-sized component that fits into any existing rack or stack of home entertainment equipment, connecting via sighat cable to

JVC

...the XL-MC100 Transport/ Storage unit, which can be placed anywhere that's convenient and unobtrusive—in a cabinet or closer, or the floor, even in a

The Critics Love Ensemble And Ensemble II. What's The Difference, Anyway?

Cambridge SoundWorks changed the audio world when we began direct-marketing Ensemble* by Henry Kloss. Ensemble is a revolutionary dual-subwoofer/satellite speaker system offering all-out performance, without cluttering up your room with huge speaker cabinets. Available only factory-direct from Cambridge SoundWorks, with no expensive middle-men. Ensemble is priced at hundreds less than it would have sold for in stores. Audio magazine savs Ensemble "may be the best value in the world."

And Then There Were Two.

Now Cambridge SoundWorks has introduced Ensemble II, a more affordable version of Ensemble using only one cabinet to hold both subwoofer drivers. Ensemble II has joined Ensemble in the ranks of the country's best-selling speak-



The real difference is in the subwoofer.

ers. We believe Ensemble II is a better system than its best-known competitor. And because we sell it factory-direct, it's half the price. Stereo Review said "Ensemble II performs so far beyond its price and size that it can be compared only with much larger speakers at substantially higher prices." We agree with the writer who said, "It's hard to imagine going wrong with Ensemble." The question is, which Ensemble system is right for vou?

The Same Satellite Speakers.

When you listen to either Ensemble system, almost 90% of the music you hear is being reproduced by the satellite speakers. Both Ensemble and Ensemble II use satellite speakers that are virtually identical.* Unlike many competing systems, Ensemble's satellites are true two-

way speaker systems, each containing a high performance tweeter and a 4-inch woofer. Stereo Review said, "The Ensemble satellites delivered a smoother output than

Thus acoustic sealed subwoofer





many larger and more expensive speakers." Small (8%"x5%"x4") and unobtmsive, they'll fit into the decor of any room. They're available in scratch-resistant gummetal grey Nextel, or primed so you can paint them any color you wish.



Ensemble satellite speakers are available primed for painting, so they can match your decor exactly.

The Same Overall Sound.

In many rooms, Ensemble It sounds virtually the same as Ensemble, especially when Ensemble's two subwoofers are placed right next to each other. The real difference between the two systems is that Ensemble, with its rwo ultra-compact subwoofers (12"×21"×48"), gives you ultimate placement flexibility.

The Same Attention To Detail.

Ensemble and Ensemble II are constructed with the very best materials and no-compromise workmanship. Their subwoofers use heavy-duty woofers in rue acoustic suspension enclosures. The satellites are genuine two-way systems with very high quality speaker components. Individual crossover networks are built into every cabinet for maximum wiring flexibility. Robust construction is used throughout, featuring solid MDF cabinets and solid metal grilles.

The Same Factory-Direct Savings.

Cambridge SoundWorks products are available only factory-direct. By eliminating the middle-men, we're able to sell Ensemble and Ensemble II for hundreds less than if they were sold in stores.

The Same 30-Day Total Satisfaction Guarantee.

Choosing a loudspeaker after a brief listen at a dealer's showroom is like deciding on a car after one quick trip around the block. So we make it possible to audition our speakers the right way—



Stereo systems featuring Disemble and Disemble II speakers with Pioneer or Philips electronics start at only \$799, including CD player, Dolby Surround Sound systems start at only \$999.

in your own home. You get to listen for hours without a salesman hovering nearby. If within 30 days you're not happy, return your speaker system for a full refund. We even reimburse original UPS ground shipping charges in the continental United States.





The only difference in satellities is that the original Ensembles use gold-plated connectors that allow use of even the heaviest gauge wire.

The Real Difference: The Ultimate Placement Flexibility Of Dual Subwoofers.

Placement of bass and high-frequency speakers in a room-and how those speakers interact with the acoustics of the room-has more influence on the overall sound quality of a stereo system than just about anything. As an alternative to spending hundreds (or thousands) of dollars on this or that "latest" amplifier or CD player design, you should invest some of your time experimenting with various speaker positioning schemes. Ensemble's two ultra-slim (41/2") subwoofers give you more placement flexibility than any speaker system we know of (including Ensemble II), and is most likely to provide the performance you want in the real world...in-your room.

How To Order.

The dual-subwoofer Ensemble system is available in two versions. With hand-some black-laminate subwoofers for \$590 or with black viryl-dad subwoofers for \$690. Pissemble II is priced at \$3590. For more information of to order call or more information of to order call or year. Well-send you car of page capers, 24 hours a day, 365 days a year Well-send you car of page concurrences and systems from Camilso, Denomation of the send of the

For A Free Catalog, Call

We Know How To Make Loudspeakers. CAMBRIDGE

SOUNDWORKS

© 1913 Cambridge Sound Norks. Extentible is a registered trademark of lambedge Sound Norks. A Rindstern and The Sommand are trademarks of cambridge Sound Norks. A R. in Ambient are trademarks of lambedge Sound Norks. A R. in Ambient are trademarks of lose to a registered stademark of Bose Corporation. Prices do not include lapping. "Only the connecting terminals are different. CHICLE NO. 6 ON READER SERVICE CARD.





DGX Digital Deconvolution Audio System

JULIAN HIRSCH • HIRSCH-HOUCK LABORATORIES

he unusually named Digital Deconvolution system is the initial offering of a new company, DGX Audio of Ronkonkoma, New York. It consists of a pair of fairly conventional speakers (DDL-1) meant to be driven by an unconventional amplifier (DDA-1).

As DGX explains in the manual, an ideal speaker should have a flat (uniform) frequency response and zero phase nonlinearity across the entire audible frequency range. Real speakers, however, generate sound that is, as DBX puts it, "blurred" by imper-

DDL-1 LOUDSPLAKE: 15½ x 39½ x 11 inches DDA-1 AMPLIFIES: 16½ x 4¾ x 14¼ inches

ROSEWOOD VENEZ

COMPLETE SYSTEM (DDA-1 AMPLIPIER AND TWO DDL-1 SPEAKERS): \$1,795

MANUFACTURER
DGX AUDIO CORP., DEPT. SR,
778 MARCON AVE.,
RONKONKOMA, NY 11779-7230

fect phase (time) characteristics and irregular frequency response. The language of the United States patent granted to inventor David Chiang (the "D" of DGX) is heavily mathematical, but its principal claim is easily stated: By knowing the amplitude and phase irregularities of a speaker over the audio range it is possible to design a "finite impulse response" (FIR) digital filter that enables the signal to be "predistorted" to compensate for those irregularities. The result, it is claimed, is an acoustic output much closer to that of the original program than would be possible if the loudspeakers were simply driven by a conventional amplifier. The process of measuring the speaker and then generating compensatory digital-filter characteristics goes by the technical term "deconvolution," hence the name of the system.

The loudspeaker portion of the Digital Deconvolution Audio System (DDAS) is a pair of DDL-1 floorstanding, three-way, dynamic-driver systems in floor-standing vented enclosures. Each has a 12-inch woofer with a mica-filled polypropylene cone and a die-cast frame, a 2-inch softdome midrange driver, and a 1-inch soft-dome tweeter, the latter two drivers both cooled by magnetic fluid.

The DDL-1 enclosure stands 39½ inches high and weighs a solid 68 pounds. It is attractively finished in rosewood veneer on all visible surfaces (including the front and back), even though most of the front panel is covered by a removable black cloth grille. The woofer port and the gold-plated binding-post terminals (which accept banana plugs or wires) are recessed into the rear panel.

cessed into the rear panel.

The DDA-1 amplifier has all the basic qualities of a fine conventional amplifier, which it resembles in its dimensions and appearance. Even its basic audio specs are conventional: 100 watts per channel into 8 ohms at less than 0.01 percent total harmonic distortion (THD) and 140 watts into 4 ohms. It is a dual-mono design and incorporates a separate power supply for each channel.

What sets the DDA-1 apart from other amplifiers is its digital circuitry. No, this is not a "digital" amplifier—

its amplifying circuits are quite orthodox analog designs. But deep within is a custom digital signal processing (DSP) integrated circuit whose operations have been designed specifically to complement the characteristics of the DDL-1 speakers.

Because the DSP circuits operate only with digital signals, the DDA-1 amplifier contains analog-to-digital (A/D) converters that enable it to be driven from any conventional preamplifier or other line-level analog source. The amp also has digital-toanalog (D/A) converters to restore the processed signals to analog form for driving its power amplifier section. But you can bypass the internal A/D converters and save yourself half a data-conversion cycle by feeding the amplifier from any consumer digitalsignal source.

The unit's rear apron has standard phono jacks for analog and coaxialdigital inputs, plus an optical digital input. There is also a slide switch that engages the deconvolution filter. Next to this is a three-position slide switch that will enable selection of other (optional) filters in future production units. Also on the rear of the amplifier are the speaker-output binding posts. which on our early-production test sample were spaced too widely for dual banana plugs. DGX says that this will be corrected.

The DDA-1's front panel has a volume-control knob, a smaller balance control, and an input selector for analog, coaxial-digital, and optical-digital sources. There is a power button with a pilot light in its center (green normally and red when the internal protection circuit disconnects the outputs). A red Digital Overflow light on the front panel comes on if the level of the input signal to the deconvolution processor is too high

We measured the DDL-1 loudspeakers the same way we test conventional speakers except that we drove them from the DDA-1. For most tests, the amplifier's analog input was used, driven from the analog output of our Audio Precision System One test system. We usually bypassed the digital filter and processor portions of the amplifier except for certain tests in which we measured the



Foreign orders add \$8 per year.

1(303) 447-9330

STEREO REVIEW P.O. Box 55627 BOULDER, CO 80322

speaker's performance with and without the digital processing. Some of these used digitally encoded test signals generated by the Audio Precision equipment.

The room response of the DDL-1 speakers was flat within ±3 dB from 120 Hz to 20 kHz. The close-miked bass response spliced easily to the room curve, yielding a composite frequency response of ±4.5 dB from 20 Hz to 20 kHz. That includes a slight bass rise in the 60- to 100-Hz range and a gradual fall in output below 50

or 60 Hz. The speaker's horizontal dispersion was good, with the output 45 degrees off-axis decreasing by 2.5 dB at 10 kHz and by 10 dB at 20 kHz. The speaker's sensitivity was exceptionally high, with a 2.83-volt input of pink noise producing a 95.5-dB soundpressure level (SPL) at 1 meter. We measured the woofer distortion with an input of 1.5 volts (equivalent to a 90-dB SPL in the sensitivity measurement). It was between 1 and 2 percent from above 1 kHz down to 100 Hz. falling to a minimum of 0.23 percent at 60 Hz and rising to 3 percent at 40 Hz and 10 percent at 30 Hz.

Although it has no particular significance when the speaker and amplifier are used as a system, the speaker's measured impedance was about 7 ohms at 100 Hz and from 20 to 30 Hz and reached its minimum of 5.6 ohms at 2 kHz. The maximum value of 26 ohms was measured at 56 Hz. Although there was no clear evidence in the impedance curve (or in our acoustic measurements) to indicate the crossover frequencies, the manufacturer gives them as 2.3 and 8.3 kHz.

The speaker's quasi-anechoic MLS frequency response at 1 meter (onaxis) with the deconvolution filter switched off was within 5 dB overall from 300 Hz to almost 20 kHz, although it fell rapidly above about 16 kHz. Switching the digital filter in produced generally minor changes in the curve, but it did flatten out the top end response noticeably. Similar measurements 2 meters from the speaker produced more decisive results. The response over much of the range became markedly flatter with the filter on, showing only a ±2-dB variation

MEASUREMENTS

DDA-1 AM	PLIFIER
All measurements were	made with the digi-
tal deconvolution filter of	ff.
Output at clipping (1)	:Hz)
8 ohms	145 watts
4 ohms	200 watts
Clipping headroom	
(re rated output)	1.6 dB
Dynamic power	
8 ohms	175 watts
4 ohms	310 watts
Dynamic headroom	
8 ohms (re rated output).	2.4 dB
Maximum distortion (20 Hz to 20 kHz)
8 ohms0.021%	(100 watts at 7 kHz)
Sensitivity	
(for a 1-watt output into	8 ohms)80 mV
A-weighted noise (rc	1-watt output)
minimum volume	
maximum volume	60 dB
Frequency response	
20 Hz to 20	

from 450 to 6 kHz. The average level of the higher frequencies, though slightly reduced, was also markedly smoother with the DSP filter, and the overall high-frequency drop-off of 10 dB from 10 to 20 kHz (with the filter off) was essentially eliminated, leaving only a ±1-dB variation between 6

and 20 kHz.

We tested the DDA-1 amplifier with 8- and 4-ohm resistive loads in the usual manner. With the deconvolution filter off, its response was ±0.1 dB from 20 Hz to 15 kHz, falling to -1.7 dB at 20 kHz. Switching the filter on drastically changed the shape of the amplifier's response curve, as expected. Output dropped some 7 dB from its maximum at the lowest audio frequencies to a series of bumps and dips, whose peak-to-trough amplitude was as great as 5 dB, from 100 Hz upward. The linearity of the amplifier's D/A converters, which we tested with digital signals from the Audio Precision system, was very good from a 0dB level to about -87 dB and still acceptable down to -95 dB.

The DDA-1 amplifier's clipping power was well above its rated values into either 8 or 4 ohms, and its dv-


namic power was substantially greater than that. During these tests we frequently drove the amplifier into clipping, which caused it to shut down momentarily with a click of its internal relays. It was none the worse for


this heavy-handed treatment. Listening tests confirmed the dramatic improvement in the upper octave resulting from the digital deconvolution filter. In that frequency range, the effect was to add definition to the program rather than to change its tonal balance. Although we heard no significant differences in the lowand mid-frequency ranges, we were unable to engage in the extensive listening tests that would be needed to detect such modest effects. We were also unable to measure the single-cvcle pulse power capability of the speakers, which exceeded the maximum output of the amplifier.

While using the DGX system, we found that the amplifier's red "digital overflow" light came on when we drove it at low frequencies (40 Hz or below) with a 0-dB digital-maximum signal. Some distortion was audible under these conditions. We assume that this was because of a misadjustment or malfunction of the amplifier (which, like the speakers, was a very early production model).

The DDAS appears to be an excellent value, considering that its price includes a pair of attractive and very listenable speakers and what amounts to a combination power amplifier and control center. Unless you want to include phono capability in your system, you may not even need a conventional preamplifier. And you have the advantage of connecting your CD or any other digital sources directly to the D/A converters in the DDA-1 amplifier, eliminating any possibility of hum or other extraneous signals entering your system.

Viewed as a complete system, the price is definitely right. I found the DGX system combination thoroughly satisfying, even though it is not as "different" sounding as one might expect from its unconventional design. As with any speaker purchase, you should audition it before buying if possible, since only you can decide whether it is right for you.

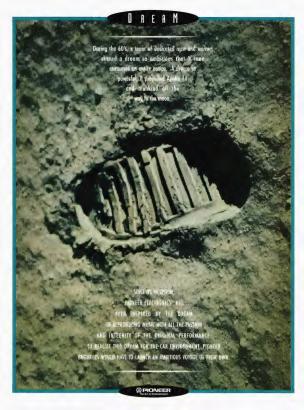



FOR PIONEER, ENGINEERING THE ULTIMATE CAR
AUDIO EXPERIENCE DIDN'T START WITH THE EARS. IT
BEGAN WITH A VISION. A VISION TO CHANGE THE WAY PEOPLE AND
SONIC INFORMATION INTERACTED INSIDE THE CAR AUDIO ENVIRONMENT.

() PIONEER



755 home runs. 4,256 hits. 2,130 consecutive games.
For every record that can "never" be broken, there
is someone with the desire, ability and perseverance to take up the quest.

ANY ELECTRONICS

COMPANY CAN DREAM OF MAXING THE ULTIMATE CAN AUDIO SYSTEM. DIE COMPANY TURBOS.
THE DREAM HITO A QUEST, FOR FOUR TEAS, PHOMES PULSENTLY PURSUED A GOAL NO OTHER MANUFACTURER HAD PHEN ACCOMPILISHED PULK AND NATURAL SOUND COLLECT IN THE CAN ENVIRONMENT.

() PIONEER

ACCOMPLISHMENT

t is simply the finest system of advanced, integrated audio components ever crafted for the automobile.

From the moment you first see the Promier Audio Commonder, you get the sease the Optical Digital Reference experience is like arother leaders of the Common of the sound, from precision sound field correction to 31-band EO adjustment to the "natural sound" qualities of Natural Acoustic Control. In fact, there at your linguetips are more modio control capabilities than are pesent in many small recording studies.

Every component in the Optical Digital Reference System has been medicalously empirected to provide the purest sound quality very respective of inc. An optical digital link provides superior camental backware components since it is impervious to the electrical interference generated inside a car. Moreover, Finneer empiress seated and the optical digital connection further than it had ever been extending the them it had ever been extending the connection further than it had ever been extending the connection further than it had ever been extending the connection further than it had ever been extending the connection further than it had ever been extending the connection further than it had ever been extending the connection of the connection

of before — of the way from the source up to the output stage of the power amplifier.


The Optical Digital Reference
System intraderes the industry's
first digitally-integrated, "perc"
Guss Ampfiler, wided gives the Classes Ampfiler, wided gives the Classes Ampfiler, wided gives the Classes and a Heilite spellity encomment
to digital sampfiler. The system
and is includes speakers that apply
performance technology from Pinnere
professional straffs and consent
drivers, as well as new Innovations developed exclusively for this
system. In short, the Optical Ogital
Reference network makes absolutely
no compressions.

It's not at all surprising that Planer would go to tech lengths to realize a draum. Because Planer wants the same thing from a construction of the same thing from a construction of the same thing from a construction of the same that you do. Seem that size the emotions. And now that Planers has realized in the same that the



For more information or the Premier dealer nearest you, call 1-800-PIONETE ext. Of











Marantz SR-73 Audio/Video Receiver

JULIAN HIRSCH . HIRSCH-HOUCK LABORATORIES

he Manntz SR-73 is a powerful, full-featured audio/video (A/V) receiver that can drive five audio channels in its surround-sound mole: three front channels (left, center, and right) rated at 75 watts each into 8 ohms, or 120 watts into 4 ohms, and two surround channels rated at 35 watts each. In ordanys stereo operation, each front channel has a 75-watt rating. In addition to its bullt-in AM/FM

tuner, the SR-73 has phono and CD inputs and inputs and outputs for two audio recorders. One of the recorder connections is identified as "DCC but both sets are equally usable for analog or non-DCC digital recorders. There are also composite-video inputs and outputs for two VCR's, a laserdisc-player input, and a video output to a TV monitor. The audio preamplifier outputs for all five channels are brought to line-level jacks on the rear apron for driving external power amplifiers if desired, although the SR-73's internal amplifiers also remain connected at all times.

The rear apron contains output connectors for two pairs of left and right front speakers (individually selectable by front-panel buttons), two surround speakers, and a center-channel speaker. The front-speaker connections are insulated stripped-wire binding posts on 4-inch centers. These connections are also compatible with dual bunars plugs, although Marantz claims that center-speaker outputs use, spring clints that accommodate only wires.

The SR-73 features a premiumgrade Dolby Pro Logic decoder system, with automatic input-channel

DIMINSTONS
161/2 INCHES WIDE, 51/4 INCHES HIGH,
131/4 INCHES DEEP

Sees

MARANTZ USA, DEPT. SR, 1150 PERMANVILLE DR., MOUNT PROSPECT, IL 60056 balancing and adjustable delay for the surround outputs. In Pro Logic operation, the delay is adjustable between 15 and 30 milliseconds: in the receiver's two music-enhancement modes, Marix and Hall, the range of adjusment is from 2 to 33 ms. In the Hall detential delayed sum signal (1. + Ry, and in Marix mode they carry a difference signal (L - Ry, The Simul (simulated-sterce) mode is used for enhancing mono signals. It passes a mono signal through both channels, the control of the contr

A fairly large receiver, the SR-73 has the kind of handsomely slide charcoal-gray (resentially black) parel and cabiner typical of Marantz products. The basic controls are alrage volume knob (motor-driven when operated from the remote correctly and smaller center-decided knobs for bass, treble, and balance. A small round button to the left of the knobs activates a Bass EQ circuit that boosts output in the low-bass range.

The other operating functions are controlled by pushbuttons. All are marked with excellent clarity in contrasting white characters. In addition to small buttons that select up to thirty FM and AM station presets and

among the various surround modes, there is a row of larger rectangular source-selection buttons across the center of the panel. Sound and picture sources can be selected independently. An Acoustic Preset Memory button can be used to store up to five combinations of surround mode, speaker balances, and delay time.

A large display window above the station selectors shows the selected station frequency in large numerals and the full status of the tuner section (auto-stereo, correct tuning, etc.). A small signal-level display is located at the left of the window.

The SR-73's amplifiers are designed to drive either 8- or 4-ohm loads safely and without degraded performance. Although not rated for sustained continuous operation into 2-ohm loads, the receiver can safely drive them to high dynamic power levels, and Marantz says it can handle two pairs of 4-ohm speakers simultaneously

from the front-channel outputs. The Marantz SR-73 comes with a system remote control that can "learn" the infrared-remote commands for almost any other component likely to be used with the receiver. Very well filled with sixty-eight buttons and three slide switches, the remote is far more formidable than the receiver itself, and we rarely used it for more than the most basic operations beyond the few that require its use (some functions-such as adjusting the surround- and center-speaker balances-can be performed only via the remote).

The SR-73 lived up to its claimed audio performance with room to spare. Although its clipping headroom was relatively small (in other words it delivered only slightly more than its continuous rated power into 8- or 4-bnh loads), the output into low-impedance loads (4 or 2 ohms) was impedance loads (4 or 2 ohms) was imperssively high, especially in dynamic measurements, which more closely reflect actual listening conditions.

The Bass EQ circuit was unusual in the magnitude and frequency of its effect. Its principal action was below 100 Hz, and its maximum boost was a large 12.75 dB at 50 Hz. The effect was sometimes pleasing at low listening levels, but some speakers could be



at risk if inadvertently driven to full power in that range (and the amplifiers in this receiver would certainly be capable of driving many small

be capable of driving many small speakers beyond their safe limits). The tuner section was fairly typical of most good receivers, with adequate FM performance in terms of sensitivity and most other characteristics. Overall, we see the Marantz SR-73

Overall, we see the Marantz SR-73 as a first-rate midprice A/V receiver with all the versatility that most people will ever need, yet not so much as to exhaust a user's patience. In addition to its versatility and fine performance, it is an unusually handsome component in this day of visually indistinguishable A/V receivers. And if the remote control proves to be overwhelming, remember that if you do not have the full complement of possible associated components your task will be correspondingly simplified-fewer than half of the buttons are used for the receiver itself.

MEASUREMENTS

AMPLIFIER SECTION	
All figures are for main front chan	nels only
except as noted.	
Output at clipping (1 kHz)	
8 ohms	.81 watts
4 ohms	21 watts
Clipping headroom (re rated output	0
8 ohms	
4 ohms	0 dB
Dynamic power	
8 ohms	10 watts
4 ohms	60 watts
2 ohms	
Dynamic headroom (re rated outpu	(1)
8 ohms	1.7 dB
4 ohms	
Distortion at rated power	.0.024%
Sensitivity	
(for a 1-watt output into 8 ohms)	
CD	
phono	
A-weighted noise (re a 1-watt outp	
CD	
phono	76 dB
Phono-input overload	
(1-kHz-equivalent levels)	
20 Hz	
1 kHz	
20 kHz	
Phono-input impedance	
48,000 ohms in parallel wit	h 124 pF
RIAA phono-equalization error	
(20 Hz to 20 kHz)	

20 Hz to 20 kHz ±0.5 dB

Bass EQ response	+12.8 dB at 50
Tone-control range	
100 Hz	+10, -9
10 kHz	±8
All figures are for FM o	
	nty except frequen
response. 50-dB quieting sensitive	da.
mono	
stereo	
Signal-to-noise ratio (a	
mono	
stereo Distortion (THD+N at 6	
mono	
stereo	
Copture ratio (at 65 dB)	
AM rejection	
Selectivity	04
alternate-channel	
adiacent-channel	
Pilot-carrier leakage	0.3
19-kHz	ma.
38-kHz	
Hum	
Channel separation	
Channel separation	
1 kHz	
10 kHz	
	45
FM	N



Accuracy from the U.S. - The Acurus 2001G home theater amplifier with 200 watts x 3 channels of high quality American power.

acurus vs them

Introducing the newest breakthrough in audio: quality

acurus

thick aluminum.



Glass epoxy circuit board as utilized in high technology medical and military components.

Laser trimmed volume and balance potentiometers.



Knobs machined from solid billets of aluminum.



Fully discrete analog components allowing for optimized design and placement.

Front panel machined from 3/16 in.



Designed, engineered and manufactured in the U.S. "Made in U.S.A" on the back panel.

them

Paper circuit board as used in electronic toys. Sometimes coated in green to look like glass epoxy.

Potentiometers costing less than 1/10th the price of laser trimmed potentiometers.

Molded plastic made to look like aluminum.

Integrated circuit chips requiring large amounts of signal correction just to get the circuit to work.

Thin punched sheet metal bent to appear thick.

May have an American name on the front, but no "Made in U.S.A." on the back panel. Made overseas.

GET REAL - GET ACURUS

Preamplifiers, Stereo Amplifiers and Home Theater Amplifiers. Made in America by Mondial Designs Ltd., internationally acclaimed as the best value in audio components. For further information and a dealer near you, please phone (914) 693-8008.

> M O N D I A L D E S I G N S L I M I T E D 2 Elm St. Ardsley, NY 10502 • 914-693-8008 • Fax 914-693-7199

No Other Loudspeaker Company Can Run This Ad.

Cambridge Sound Works is a new kind of audio company, with factory-direct savings, and much, much more...



Audio Hall of Pame member Henry Ricos. Cambridge SoundWorks products are designed by our co-founder, Henry Ricos, who created the dominant speakers of the '50s (AR), '60s (KLH) and '70s (Advent).







Five year limited parts and labor speaker warranty.

All of our speakers are backed by a five year parts and labor warranty in some cases, we'll even send you a replacement consoler before we've recruised your deficitive unit.

NEW: The Cambridge SoundWorks Charge Card. Qualified customers can now charge items from our catalogwithout bying up the credit lines of their other charge cards. Call for your application today!





High performance dipole radiating surround speakers. The Surround (\$399 pt) 6. The Surround it (\$249 pt) use dipole radiator technology for surround sound the way it was ment to be heard. Hundreds less than competing speakers.

NEW: Model Eleven A transportable component system The same high performance of the original, in a smaller package. Carrying case doubles as system subwoofer. Works on 100, 220 & 12 volts. Introductory price \$699.





Ambiance ultra-compact speaker system. We think Ambiance is the best "mini" speaker available, regardless of price. Bases and high-frequency dispersion are unreached in its category. \$775–\$200 each. Ambiance in-Wall high performance speaker system. We don't know of any other in wall speakers that much its performance, value and ease of installation. Includes acousti suspension cabiner, gold plated speaker terminals. \$329 pt.

Call 1-800-FOR-HIFI for a free 64-page catalog with components and systems from Cambridge SoundWorks, Pioneer, Philips, Sony, Denon and others.

We Know How To Make Loudspeakers.

CAMBRIDGE SOUNDWORKS

154 California St. Suite 102F, Newton, MA 02198 1-800-367-4434 Roc 617-332-9229 Canada: 1-800-525-4434 Outside U.S. or Canada: 617-332-5936 © 590 Canada; fraudwish

CIRCLE NO 6 ON REAGER SERVICE CARD

TEST REPORTS

SECOND OPINION Maranty SR-73 A/V Receiver

The surround-sound circuits of this unusually good-looking receiver tested well both in the lab and the listening room. Measurements of Dolby Pro Logic performance produced fine results in nearly all respects, including distortion, noise level, and channel separation. Only two figures stand out as marginally acceptable. The first is the highfrequency response of the center channel in Dolby Pro Logic mode. It started rolling off around 1 kHz and was down by 1 dB at 7 kHz and by 3 dB at 14.1 kHz. A rolloff of this nature can be audible, but probably only in direct comparison with a unit that has flatter center-channel performance. I heard nothing untoward from the Marantz SR-73 that I could attribute to it. In fact, the rolloff could relieve a bit of the harshness that some soundtracks take

on when played loudly Also relatively benign was the typically large Dolby Pro Logic surround-channel calibration error of 5 to 6 dB. Most of this error arises because a receiver's Dolby decoder chips have a different reference point from the one we use. Dolby decoder chips typically have reference points of around 300 millivolts, whereas we test decoders through the laserdisc input at the laserdisc-player reference output level of 141.4 mV. approximately 6.5 dB lower. The jury is still out as to whether an error that large will cause audible noise reduction mistracking with typical program material-it is clearly audible with pink noise at the right level-mainly because without direct access to the chips themselves a controlled test is difficult to conduct. Still, the smaller the error the better. especially if you are indeed using a videodisc player

On the whole, the SR-73 sounded excellent in Dolby Pro Logic operation, producing accurate sound steering with our entire collection of Pro Logic torture passages. Background noise was very low, and the considerable power the SR-73 can generate was beneficial with actionmovie soundtracks

Unfortunately, I found the two music-enhancement modes practically

SURROUND PERFORMANCE

All measurements are referred to 1-kHz output levels of 2.83 volts (1 watt into 8 ohms) with laserdisc input reference levels of 200 millivolts (mV) for the left and right front channels and 141.4 mV for the center and surround channels. All measurements were made with the Normal center-channel setting except frequency response and channel separation, which were made with the Wideband setting. All measurements are for Dolby Pro Logic operation only.

Frequency	
left, right	20 Hz to 20 kHz +0.33, -0.31 di
center	20 Hz to 14.1 kHz +0, -3 d
surround	55 Hz to 6.6 kHz +0, -3 di
A-weighte	d noise
left, right	77.2 di
center	77.8 d
surround	73.7 d
Distortion	(THD+N)
left, right	0.029
center	0.14
surround	0.11
Surround	decoder input-overload
levels	
left, right	+19.2 d
center	+21.5 d

Surround-channel-delay indicate Surround-channel noise-reduction of 1 kHy 46 dB at 3 kHz +5 dB Channel separation (100 Hz to 7 kHz) left output, right driven ... >48 dB

left output, center driven >27.4B .>31 dB center output, surround driven surround output, left driven... >40 dB left output, surround driven. >36 dB surround output, center driven >40 dB center output, left driven>40 dB useless. The manual says that the Hall and Matrix modes send to the surround speakers a delayed version of the sum (L+R) or difference (L-R) signal, respectively. That is indeed the case, But the manual neglects to mention that there is considerable invertedphase crossfeeding of the two front (left and right) channels. And that crossfeeding is accompanied by overall level changes and weird frequency responses. For example, in both Hall and Matrix modes the leftchannel output when we fed the receiver a left-channel signal showed two wideband response dips of about 9 dB, centered at 200 Hz and 1.5 kHz, accompanied by an overall boost of about 6 dB. Response below 40 Hz was rolled off, too. When fed only through the right channel, the leftchannel output showed a broadly humped response, peaking at +6 dB at I kHz and rolling off below 100 Hz and above 10 kHz. All told, switching between Hall and Matrix made little sonic difference compared with the "phasiness," the reduced front-image spread, and the gratingly harsh frequency response introduced by using those modes in the first place. Too bad, because the SR-73's music-enhancement capabilities would be much better if Hall and Matrix did only what the manual says that they do.

Although forbidding in appearance, the remote control is rather easy to use, especially if you don't want to program it with the commands from other handsets. All the receiver controls except power are logically arranged on the lower half of the remote, which also contains all the necessary controls for proper Dolby Pro Logic level setting. I encountered no difficulties with hookup, setup, or operation.

The SR-73 is a very good receiver to serve as the basis of a hometheater system, especially if it is to be used mainly to play Dolby Surround soundtracks. Its lack of a useful musicenhancement mode should not deter those who would not normally use such features from considering its many other virtues. - David Ranada



Audio Catalo

Our 64-page catalog is loaded with component and music systems from Cambridge SoundWorks, Pioneer, Philips, Denon, Sorw and others, Because you buy factory-direct, with no expensive middle-men, you can save hundreds of dollars. For example, a Dollar Surround system. with Ensemble II speakers, rear speakers. Philips Dolby Surround receiver, CD player and system remote is less than \$1,000. Call today and find out why Audio magazine said we "may have the best value in the world."

- · Call toll-free for factory-direct savings.
- · Save hundreds on components and systems from Cambridge SoundWorks, Pioneer, Philips, Denon, Sony and more,
- · Audio experts will answer your questions before and after you buy. 8AM-midnight. 365 days a year-even holidays. . 30 Day Total Satisfaction Guarantee on all
- Cambridge SoundWorks products.



CAMBRIDGE SOUNDWORKS

154 California St. Suite 102F, Newton, MA 02158 1-800-367-4434 Pey-617-337-0770 Canada: 1-800-525-4434 Ourside U.S. or Canada: 617-332-5936 © 1992 Cambridge SoundWorks

ORIGINAL MASTER RECORDING"

פעילו פבלו מבולעו הגללפו מל



... Is Still True Today.





Original Generation Master Tape Source Half-Speed Mastered

Specially Plated and Pressed on 200 grams of High Definition Vinyl

> Dust Free – Static Free Rice Paper Inner Sleeves Special Protective Board Heavy Duty Protective

Packaging Super-Fi Super Stars Limited Edition

LISTEN...







MESL



mry2 1-29.

THE SWEET SOUND OF VINYL IS BACK!

The Tradition Continues at Mobile Fidelity Sound Lab.



Well, it's February, and you know what that means—celebrating President's Day, mourning the death of Mr. Ed (2/28/79), and, most important, finding out the winners of Ster REO REVIEW's Record of the Year Awards. Yes, once again our editors and critics have chosen (as they have now for almost three decades) what they consider the top twelve pop and classical albums of the mast year.

You'll find our delightful dozen on the next two pages, along with an additional twenty-four releases cited as honorable mentions. As usual, the winners were chosen on the basis of musical interest, quality of performance, and sonic excellence.

We're also pleased to give a Special Achievement Award to a monumental thirteen-CD set, "Vladimir Horo-

witz: The Complete Columbia Masterwork Recordings 1962-1973."

We think our winners suggest that 1993 was a pretty good time for recorded music. We hope you agree.

-Steve Simels and Robert Ripps





ROBYN HITCHCOCK

Respect A&M. "Maybe Hitchcock's greatest accomplishment to date."



DEBUSSY

The Martyrdom of Saint Sebastian Sylvia McNair, Ann Murray, Nathalie Stutzmann, Leslie Caron; London Symphony Chorus and Orchestra, Michael Tilson Thomas conducting, SONY, "What a marvelous score! . . . This could be a breakthrough recording."



SHAVER

Tramp on Your Street Zoo. "That an album this real came out of Nashville in 1993 is simply a miracle.'



BARTOK

The Wooden Prince; Cantata Profund John Aler, John Tomlinson; Chicago Symphony Chorus and Orchestra, Pierre Boulez conducting. DEUTSCHE GRAMMOPHON. "Listeners who are not familiar with these works will find the CD an enchanting discovery



HANDEL Kathleen Battle, Marilyn Horne, Samuel Ramey, John Aler, others; Ambrosian Opera Chorus; English Chamber Orchestra, John Nelson conducting. DEUTSCHE GRAMMOPHON. . . the 'first full-length English opera' gains added strength from this vitally dramatic performance."



HENEH CHERRY Homebrew

VIRGIN. "More than just exciting, fresh music--it's a balm to the soul."



CECILIA BARTOLI

H You Love Me: 18th Century Italian Songs György Fischer (piano). LONDON. "Bartoli's art combines simplicity and sophistication."



RY COODER & V. M. SHATT A Meeting by the River

WATER LILY ACOUSTICS, "Ry Cooder's first foray into Indian music [is] a dazzling meeting of East and West."



KYOKO TAKEZAWA Violin Sonates by Debussy, Ravel, and Soint-Soons Rohan De Silva (piano). RCA. "Takezawa has

recorded some technically impressive performances, but none as fearlessly personal....



HENRY THREADGILL

Too Much Sugar for a Dime AXIOM, "As entertaining as it is adventurous."



WILLIE NELSON
Across the Borderline
COLUMBIA. "The Red-Headed Stranger is back
with a vengeance."



Plano Concerto No. 1; Alto Songs Stephen Kovacevich, Ann Murray: London

Philharmonic, Wolfgang Sawallisch conducting. EMI. "Ideally recorded, this is a superb achievement all around!"

HONORABLE MENTION

ANONYMOUS 4 An English Ledymass.

DARBER

Adegio for Strings; School for Scandal; Symphony No. 1; Essays Nos. 1 and 2; Scene from Shelley. Baltimore Symphony, David Zinman cond. AGO.

Symphony No. 7. BRITTEN

Four Sea Interludes from "Peter Grimes." Boston Symphony, Leonard Bernstein cond.

DEUTSCHE GRAMMOPHON.

Columbia: Live at Missouri University. Zoo.

The Wheel, COLUMBIA.

FAURÉ

Quartets for Piono and Strings.

Isaac Stern, Jaime Laredo, Yo-Yo Ma, Emanuel Ax. Sony.

Songs. Anne Sophie von Otter, Bengt Forsberg (piano). DEUTSCHE GRAMMOPHON.

PJ HARVEY Rid of Me. ISLAND. HINDEMITH Kommermusik.

Royal Concertgebouw Orchestra, Riccardo Chailly cond, LONDON, KORNO OLD Das Wunder der Heilane,

oloists, Chorus, Radio Symphony Orchestra of Berlin, John Mauceri cond. LONDON.

THE LOUD FAMILY
Plants and Birds and Rocks and Things.

PATTY LOVELESS Only What I Feel, EPK.

MANLER
Symphony No. 9.
Berlin Philharmonic, Leonard Bernstein cond.

DEUTSCHE GRAMMOPHON.

LYDIA MENDOZA

Mal Hombre: Classic Tejano Music.

ARHOOLIE.

Thirteen Pictures: The Charles Mingus Anthology. RHINO.

POULENC
Diologues of the Cormelites.
Soloists, Chorus and Orchestra of the Lyon
Opera, Kent Nagano cond. VIRGIN.

Tosca.

Mirella Freni, Placido Domingo, Samuel
Ramey, others; Philharmonia Orchestra.

GRAMMOPHON. MARCUS ROBERTS H I Could Be with You. NOVUS

CAROL ROSENBERGER

JIMMY SCOTT All the Way, SIRE.

MATTHEW SWEET
Altered Beast, A&M.

TANGAZO

Music of Latin America.

New World Symphony, Michael Tilson Thomas cond. ARGO.

THE VELVET UNDERGROUND LIVE MCMXCHIL SIRE. RANDY WESTON

AND MELBA LISTON Volcano Blues, VERVE.

SPECIAL ACHIEVEMENT

VLADIMIR HOROWITZ The Complete Columbia lasterworks Recordings: 1962-1973

SONY. Thirteen discs.



TEN WORST POP ALBUMS OF



Face it, any year that brings us three competing Amy Fisher TV movies has much to answer for. By way of proof, we offer here ten 1993 CD's that particularly rankled our reviewers. -S.S.

HEART

Desire Walks On CAPITOL. "Everything you never wanted in a derivative hard-rock band-and less." R.G.

BARNEY'S FAVORITES VOLUME I EMI. "As a four-year-old friend put it, 'I hate y

You hate me. Barney is so sti-ink-y." " R.G.

ELVIS COSTELLO AND THE BRODSKY QUARTET The Juliet Letters

WARNER BROS. "There isn't enough postage in the world for this much pretension." R.G.

MEAT LOAF

Bat Out of Hell II—Back into Hell MCA. "The most ridiculous sequel to a turkey since Drum followed Mandingo." S.S.

ROBERT JAMES WALLER The Ballads of Madison County ATLANTIC. "Robert James Waller makes the

transition from wimpy novelist to folk balladeer. Somebody should have blown up the bridge," A.N.

CEREMONY Hang Out Your Poetry DGC. "The Great Lost Hudson Brothers

Album," S.S. Ш2

ISLAND. "Techno-overkill is becoming U2's Frankenstein monster-witness 'Zooropa,' a failed experiment better left locked in the laboratory." P.P.

PETE TOWNSHEND Psychoderelict ATLANTIC, "Crazy, man, crazy," P.P.

DAVID CROSBY **Thousand Roads**

ATLANTIC. "More Mister Rogers than mystic, Crosby is, in a word, cloying on an album sopped from the Phil Collins school of milktoast." P.P.

SAWYER BROWN Outskirts of Town

CURB. "What do you get when you cross the Monkees with Billy Ray Cyrus? Sawyer Brown in tank tops." A.N.



THE RAVE OF AUDIO INSIDERS, NOW AT "INSIDER" PRICING.

"Considering their price and fine all-around performance. the Digital Phase AP-1s would be a good addition to any audiophile's system."

> D.B. Keele, Ir. AUDIO Magazine

"The best performance and value in the marketplace today, period."

> Maurice Paulsen Crown International

"After 15 years in the speaker industry. I've heard about a lot of 'major breakthroughs.' Digital Phase is truly innovative. I cannot imagine a system more accurate. The AP-2s are now in my home."

> Woody Jackson Former President & CEO Klinsch & Associates, Inc.

Yes, the audio industry is raving about DIGITAL PHASE. And for good 19290n.

Thanks to the new, patented Acousta-ReedTM technology, DiGITAL PHASE brings bass depth and definition to a level never before realized

Thanks to the special one-piece tweeter of soun titanium, DIGITAL PHASE delivers an uncommon freshness and sweetness to high frequencies.

And now, thanks to factory-direct pricing, DIGITAL PHASE makes true audiophile-quality sound affordable to virtually everyone. The DIGITAL PHASE AP.5, for example, is just \$449 a pair in genuine oak cabinetry.

This is not a close-out of old technology. This is a factory-direct offer on the latest, patented technology. And with our 30-day return policy, you simply can't lose. So there's absolutely

no reason to wait. Call us today with your order, or just to find out more.

DIGITAL PHASE. The rave of audio insiders, now at "insider" pricing,

Digital Phase



Pictured, the	
AP-1, one of five	
DIGITAL PHASE	
stems with patented	
Acousta-Reed	
technology.	

AP-2, \$1199/pair	☐ AP-4,
lame	
treet Address	
San Caran FILD	

Send me info as indicated Place my order as indicated

reet	Address_

tre	et	A	dd	re	SS	
itv	/S	ta	te	/7.	IΡ	

rcc:/wdu/css_		_
ty/State/ZIP_		
elephone (
richitotic (_/	_

VISA [MC	AMEX	Exp
Signature_			

\$2199/pair

CIRCLE NO. 28 ON READER SERVICE CARD

Mail to: DIGITAL PHASE Insiders • 2841 Hickory Valley Rd. • Chattanooga, TN 37421

GETTING IT TOGETHER

A STEP-BY-STEP GUIDE TO SYSTEM BUILDING

utting together a sound system is tougher than ever. For one thing, there are far more good choices now than there were in, say, 1984—not only in speakers, but also in power amps, receivers, outboard processors, and source components, especially CD players. For another, you have to figure out just what sort of setup you're aiming for: A minimalist audiophile system, or a feature-rich, automated array? An elegant suite of minicomponents, or a towering techno-stack? And then there's the home theater question: Will your system be used purely for music, or is it destined to double up on cinematic and musical audiolyideo extravaganzas? Either way, literally hundreds of excellent components are available, all vying for space in your equipment rack. But where do you star?

Though some would argue the point, the fundamentals of good sound are constant, whether your goal is to reproduce music or movie soundracks. So it makes sense to approach system design from the classic "stereo" point of view—without losing sight of the many home theater upgrade opportunities that exist today. You can assemble a fine-sounding basic system for \$750, or you can build one that's no more elaborate on the surface for five times as much. It all depends on what you want. One thing's certain: Today's audio

Opposite page, from top left: Atlantic Technology Model 154 SR surround speakers (\$169 a pair), Sherwood RV-6030R A/V receiver (\$475), Atlantic Technology Model 151 LR satellite speakers (\$169) each), Rotel RB980BX power amplifier (\$600). Adcom GTP-458 preamp/tuner (\$450), Yamaha CDC-635 CD changer (\$299). Far right, a pair of Boston Acoustics HD8 speakers (\$250 a pair) and Atlantic Technology's Model 153C center-channel speaker (\$139).

CO BY JETTERY ISTE





Carver's AV-634 power amplifier (\$600) is designed for audio or AV systems that employ more than two speakers. Rated to deliver 60 wats into each of four channels, it features a threechannel mode and an adjustable electronic subwoofer crossover.



Denon's five-channel AVR-1800 A/V receiver (\$700) packs a Dolby Pro Logic surround-sound decoder and a digital processor with three movie and three music modes. Total power output is 250 watts, including 70 watts each to the three front channels.



The AC-650 two-way speaker (\$269 pair) from Pinnacle is 16% inches tall and features a patented Diaduct port that terminates in the rear of its cabinet to enhance bass response. Its low-frequency limit is given as 40 tHz. Available in cherry woodgrain and black viny! Infishes.



The Philips DCC-990 Digital Compact Cassette recorder (\$800) automatically inserts track numbers during recording and has a title-search mode for selecting songs on a prerecorded DCC. Dolby C noise reduction is included for analog cassette playback.



JVC's XL-M409TN "6+1" CD changer (\$330) has a six-disc magazine for extended playback and a single-disc tray for on-the-fly disc swapping. You can create your own thirty-twotrack playback sequence, pulling tracks from any of the seven discs currently loaded.



KEF's 26-inch-tall Q38 speaker (\$500 a pair) is a ported two-way design with a single 5'x-inch Uni-Q driver—a wooter with a soft-dome tweeter in its core. The Q30 is magnetically shielded and boasts a maximum output of 110 d8 SPL. Available in gray, black-sh, and oak vinyl finishes. and AV components offer better performance and more features for fewer dollars than you would have paid, say, ten years ago. Take receivers. 1983, a "O-watt-per-channel stereo receiver sold for about \$500. Today, for the same amount of money, you can buy a five-channel AV receiver that packs 200 watts of total power and has a built-in surround-sound decoder, among other things.

he best place to begin your shopping expedition is at home: Than a cup of coffee and map out—either mentally or on paper—a plan for the system of your dreams. Then develop a budget around those plans. One bit of fiscal \$2,000 if you determine that, say, \$2,000 if you determine that way you hadn't figured on in your spending plan.

Next, take a good hard look at how you plan to use the system: Do you really want surround-sound capability and the get-go, or can you add it later? Will you actually use a turntable? How about a cassette deck? Every component or extension you can eliminate or put off at the outset will free up money for the fundamental components—speakers, amplifiers, and primary sources.

Speaker Survey

Speakers are the single most important element of any system—a point that few would dispute. Your choice will dictate to a large extent the range—and quality—of the sound produced by your new system; the speakers you choose will also have a direct bearing on how much amplifier power you need and how loud the system will be able to play.

Extensive listening is, of course, the key to selecting speakers that you'll be happy with for years to come. Unfortunately, auditioning speakers in a retail demo room is a far cry from living with a particular model for a few days or even weeks. One thing you can count on: Room acoustics will have a profound-and unpredictable-effect on musical balance, imaging, and transparency. So be sure to look into the store's return/ exchange policy before you begin shopping. Happily, most reputable dealers let their customers return or exchange products within a month or so after nurchase.

Never base your buying decision

purely on size—especially if your budget is limited. Choosing a highquality bookshelf speaker over a questionable larger "lower" model almost always pays off in musical accuracy. The tradeoff, of course, is less deep bass. But you can always add a powered subwoofer a few momba or years down the road—and there are years down the road—and there are choose from. (Also, keep in mind that a subwoofer is a popular addition come home theart time.)

On the other hand, if you're working under fewer monetary constraints,
floor-standing speakers generally offer an excellent performance/value ratio. Three-piece "subwoofer/statelliv"
systems, whether prepackaged by a
single manufacturer or assembled
with expert sales help, are another extremely popular alternative. Such
combos offer a wealth of space-saying placement options, often without

sacrificing sound quality. Regardless of the configuration you decide on, it's a mistake to select a speaker on the basis of a particular design principle or how many drivers it has. The audio world is full of excellent two-way speakers that out-perform three-way models. Similarly, avoid imposing-looking four- and five-way speakers that are offered at suspiciously low prices: These are almost always designed more for looks than sound. While most speakers use conventional dynamic drivers-cones 'n' domes-you're also bound to come across superb-sounding planar and electrostatic designs, but generally in the higher price regions only.

Here are a few general guidelines that should help you narrow the speaker field:

□ Ask the demonstrator to use an amplifier (or receiver) and CD player in your power and price range—but alternate with higher-end gear to get a broad view of the speakers' sonic potential.

□ Listen to a variety of music, but concentrate on the sort of material you favor. Buying speakers that impress to no end with Bruckner's Ninth makes little sense if you never listen to classical music for pleasure. □ If you're comparing speakers via

an A/B switcher—an ear-opening option many dealers offer—be absolutely certain that the comparator is responsibly balanced to play the competitive models at equal volume. It's a psychoacoustic fact that the speaker that plays loudest will almost always be perceived as "better" by unsuspecting listeners. At any rate, go through A/B comparisons and extended listening sessions before making a final judgment.

judgitelle.

Judgi

Powering Up

Speaker selection and amplifier power go hand in hand. Along with room size and listening tastes, your speakers play a key role in determining the power requirements of your system. To get some idea of how much power you need, you can look at a speaker's specification for sensitivity (sometimes erroneously called "efficiency"), which indicates how loud (in decibels of sound-pressure level, or SPL) it plays with a given input (usually 1 watt) measured at a given distance (usually 1 meter). Basically, the higher the number, the louder the speaker. Sensitivity specs of 87 to 93 dB SPL (1 watt at 1 meter) are typical. Also keep in mind that the larger the listening room, the more power you'll need to achieve a reasonably loud volume.

enerally speaking, it's all but impossible to have too much power. Extra watts insure that the amplifier won't clip, no matter how dynamic the music. large the room, or high the volume. While there's no hard-and-fast rule, it's reasonable to aspire to a power amplifier that's rated to deliver at least 50 percent of your speakers' "maximum recommended input power" (assuming the speakers are from a reputable maker whose specs are technically reliable). And, if you have room in your budget, there's no reason to avoid aiming for or even somewhat exceeding the 100-percent mark. especially if you favor classical music and other types that have a wide dynamic range.

Unfortunately, the cost of power rises geometrically as you climb the wattage ladder. Most entry-level ste-



The MDS-501, Sony's first full-size MD recorder, offers several advanced editing features and has a jog dial for quick access to any track. You can also store up to 1,700 characters worth of other information—song titles, etc.—for each disc you record.



Going beyond the five-CD capacity of most carousel CD changers, Onkyo's Integra DX-C606 (\$470) accepts six discs. You can change three discs while one is playing and choose the next track you wish to hear without interrupting the one currently playing.



NAD's Model 1600 preamplifier/tuner (\$449) has five line-level inputs, a discrete phono section, an external-processor loop, and fourteen AM/FM presets. It also has a defeatable Bass EQ circuit that boots tonly the lowest bass frequencies by 6 to 8 dB.



The Harman Kardon HK6350R integrated amplifier (\$499), rated to deliver 60 watts per channel into 8 ohms, has four inputs, including one for phono, two tape loops, an externalprocessor loop, a defeatable infrasonic filler, and a loudness switch.

reo receivers deliver 30 to 60 watts per channel, which should be adequate for moderate listening levels in an average-size room. Keep in mind that doubling the wattage (or more) is the only significant power upgrade: twice the power yields only 3 dB more usable dynamic range, a very modest increase.

If you proceed much beyond the 100-watt range, you might want to consider separate components-preamplifier, power amplifier, and tuner-in place of the ever-popular receiver. Receivers have a clear value advantage, however, and they're obviously more compact. They can also deliver superb performance and offer an array of features unknown to most preamps. Separates, on the other hand, have inherently greater upgrade flexibility-you can increase power simply by replacing the power amp, or get the tuner performance you want by mixing brands or models.

Don't overlook integrated amplifiers. Something of a forgotten component in the U.S., integrated amps are very popular in Europe and Japan, and they offer excellent performance value. An integrated amp is particularly apt for those with no desite of radio—as well as for radio fans who want the flexibility to select a separate tuner without following the full-separates path.

Home Theater. Here the angle is twofold. First, surround-sound A/V receivers and A/V integrated amps offer significant value. Even if you're not planning a multichannel setup right away, you should at least consider an A/V model: it's all but certain to be less costly than adding an outboard surround processor and a multichannel power amp later on, (A/V receivers dominate the shelves anyway-in fact, you may have a hard time finding a plain-vanilla model that meets your performance needs.) Second, the power equation is balanced somewhat differently in a surround-sound setup. With four or more channels playing simultaneously, individual power needs drop significantly, perhaps by as much as a third. But keep in mind that you're still likely to do much of your music listening in two-channel stereo mode, so power up accordingly.

If you decide to add an outboard surround-sound processor later on, you'll need to patch it into the system via the "tape loop" of the receiver or preamp. So if your blueprint calls for one or more recorders, make sure the

COUNTRY

Suzy Boggus Carlene Carter Andy Childs Diamond Rio loe Deffie McDride & The Ride Marul Mcker John Michael Montgomery

Lee Roy Parnell

Pirates Of The

Mississippi

GUARANTEED

SPECIAL DEBS up to four times a year

DISCOUNT CERTIFICATES for cd's and cassettes for cd's and case to o

SATISFACTION GUARANTEED no obligation to buy cancel any time

same low price

LOW PRICE LOW PRICE plus shipping PØP

Bobby Brown with Whitney Houston En Voque

Exposé Welissa Ethridae

Bee Gees Deborah Harry George Michael Tom Petty & The Heartbreakers

Tears For Fears Jody Watley

every month

details below

OF YOUR CHOICE

1 - 8 0 0 - 6 3 8 - 8 4 0 0 DEPT.

ROCK VIDEO MONTHLY

Yes. I want to sign up for this brand new music video program for my VCR. Send me my free music video collection. billing me for just shipping and handling. Each month I'll get a new VHS casserte with ten new music videos for the guaranteed low price of ust \$2.50 plus shipping and handling. In addition to the monthly videos. I may receive up to four times a year special videos guaranteed at the same low price plus shipping and handling. I have no obligation to buy anything ever and can cancel anytime I want. Send my first and future music videos from this category (check only one):

101	_ ALTERNA	TIVE ROCK	□ RAP	HEAVY I	HETAL [СОUNT			
	In addition to the free video checked above, please send me another video [Sesturing 10 music videos at 30% off. (just \$1.49 plus shipping and handling) []								
Commi	ALTERNATIVE Spin Doctors	BH Surfers Mantissa - 5 mg	M	C Lite, KRS-One	Little	UNTRY e Texas			

Mr./Mrs./Ms				
Address			Apt	
City		_State	Zip_	
Phone ()			Age _	
Have you bought anything by mail?	☐ Last 6 months	☐ Last ve	Tac	O r

Do you have a credit card? 9 No (B) RY6 Do you usually buy your music on: U CD Cassette We reserve the right to sak for additional information, reject any application, or cancel any membership Limited to new members only. One membership per family. Local sales tax, if any, will be added. We reserve the right to substitute any video in this ad. Some videos may contain material objectionable to any viewers

THIS SPECIAL OFFER WILL no obligation to buy .

OF YOUR CHOICE allable in stores



A Tribe Called Quest

every month

GUARANTEED

LOW PRICE

98 a month

details below

pop • alternative • heavy metal • rap • country

HEAVY METAL

RAP I - 8 0 0 - 6 3 8 - 8 4 0 0 DEPT.



NO POSTAGE NECESSARY IF MAILED IN THE UNITED

BUSINESS REPLY MAIL FIRST CLASS MAIL PERMIT NO. 22 TAMPA FL.
POSTAGE WILL BE PAID BY ADDRESSEE

ROCK VIDEO MONTHLY P.O. BOX 61096

TAMPA, FL 33661-1096

STATES

VIDEOS up to four times a year -same low price CERTIFICATES DISCOUNT for cd's and cassettes for cd's and casseries

SATISFACTION GUARANTEED cancel any time receiver or preamp has enough inputs and outputs. Receivers and integrated amps with separable pre-out/main-in-jacks offer another level of hosther level with separable pre-out/main-in-jacks offer another level of hosthering. A central component with intergrated, one-touch audio/video source switching is a real convenience (although not a strict necessity) host surround-equipped A/V receivers include this feature.

Consider the Source

With the loudspeaker and power questions settled—or at least narrowed down—your next vital decision concerns source components. Unless you're a stubborn vinyl freak, it's a given that your system will include a CD player. But what sort? A \$140 back-page ad special or a kilobuck high-end model? A single-disc player or a changer that can play five or more CD\(\frac{1}{2}\)?

more CD's?

It's a fact that the audible differences between, say, \$200 CD players are minuscule, if perceptible at all.

removed the perceptible at all complements are not all that differences in the perceptible at all complements are not all that difference, there, Jit's also a fact—though less widely acknowledged—that the sonic distinctions between a \$200 CD player and a \$2,000 one are probably less dramatic than those between a \$200 turnable and a \$300 one. There are differences, tiny as they may be; it's differences tiny as they may be; it's called performance to notice themelet along make value indements.

Nonetheless, there are compelling arguments for buying above the bottom of the line. Features are one: Clearer, more informative visual displays, home-taping automation aids, and elaborate track-programming and library/grouping abilities are just three refinements that more expensive models offer. But inherent physical quality is perhaps more valuable. Biggerbuck players are generally more solidly built and employ better mechanical and electronic parts. None of that necessarily corresponds to better sound. or even greater longevity-although the latter is probable-but hey, who wouldn't prefer a Rolex to a Timex. given the choice?

Multidisc changers are popular because they offer good value, extended playback, and quick disc access with near single-play convenience. Carousel changers that accept five or six discs on a platter are the hands-down best-selling configuration today, per-

THE HOME THEATER UPGRADE

f you're planning to upgrade an existing system—or one you've got in mind—to full, surround-sound home theater status,

here's a feedstiff of filings to cleave or JOPEACRES. Does the manufacturer of your main speaker mice a tonally machine december and speaker? If your primary speaker are small and subable for surround-channed work, you may do wail by moving them toward the back your literating room and bying a maked which was to the subable of your literating room and bying a maked these piece speaker array for the front channeds. Speaker stepped for surround channeds are usually small, flow-up, systems with a wide dispersion pattern, specially designed "Speake" surround speakers used as viceded but more speakers are as well designed to speakers used as viceded but more speakers are as well designed to speakers are as well as speakers are as speakers are as well as speakers are as speakers are as speakers are s

"THE SUBWOOFER. Do you want to plan for a subwoofer? your main speaker eless than full-range (if they play down to only 80 or 160 kHz), a subwoofer is a valuable addition that will bring move soundtracks to life. But you might decide to add one at a later date, since a good powered subwoofer can be very expensive.

MULTICHANNEL POWER. Are you better for replacine, a store receiver or amplifier

with a five-channel-nower A/V receiver or integrated amp, or adding an outboard processor and amplifier to your stereo system? It depends on the condition, performance, and power of your existing rig as well as your upgrade budget. A/V SWITCHING, An A/V receiver or amplifier will probably include integrated audio/video switching, so that one touch can select both video and audio components for monitoring or recording. Many add-on processors and processoramps also provide this convenience. A/V SOURCES, Consider a laserdisc/CD combi-player, especially if it's time for a CO player upgrade. Laserdiscs are the best A/V source available today. A VCR equipped with the VHS Hi-Fi sound system is essential for videotape playback. ROOM LAYOUT AND CABLING, You'll need space for a center-channel speaker, two surround speakers-preferably high on the side walls toward the back of the room-and possibly a subwoofer. You'll also need to connect everything, so put some forethought into concealing the wires. Several firms make flat wiring that can be run under carpeting.



The Fosgate Audionics Model Three A audio/video preamplifier (\$2,499) boasts four surround modes for movie soundtracks—including Dolby Pro Logic and Home THX—and five music modes. It has six A/V inputs, including two with S-video connections.



Kenwood's SS-992 processor-amplifier (\$300) is designed to convert a two-channel system into a home theater setup. It features a Dolby Pro Logic surround-sound decoder, a 30-watt center-channel amp, and a 15-watt surround-channel amp.

THE LITTLE THINGS

me of us are content to have our gear and recordings stacked in orange crates and cardboard cartons, while others demand an everything-in-itsplace wall unit. Decide at the outset which group you're in, and budget accordingly. A/V furniture could cost you a C-note or two, or more than your entire system-it all depends on size, quality, and finish. Storage for CD's, LP's, and tapes is another item that may well deserve a budget line. Speaker stands (for bookshelf-size speakers) are one furniture accessory with a real sonic payoff, Stacked milk crates work, too, but one way or another get those small sneakers up off the floor.

Similarly, don't forget accessories. If LP's figure prominently in your listening. a good record cleaner is a must. Property handled CD's don't require regular cleaning, but there are plenty of good CD cleaners for the less attentive. Speciality cables and speaker wiring may or may not deliver audible enhancements, but they can impart a sense of sonic security. An AC-line filter/power-conditioner could protect delicate gear from line spikes. and it may contribute to slightly lower noise from digital audio sources in areas where the AC power is polluted by RF "hash." Excellent stereo headphones provide superb private listening, and they can resolve the occasional listeningroom/television household conflict. As for the thousand-and-one other audio accessories of less immediate importance, now's the time to start a list for distribution to your nearest and dearest next Christmastime.

haps because it's easy to see which CD's are loaded in the changer and because you can change other discs while one is playing. Magazine changers that accept a pull-out six- or ten-disc cartridge come next; a few models even accept two or three cartridges for all-day playback. Unless you need super-long unattended playback, or crave the magazine format's potential exchangeability with a compatible car CD changer, a carousel is the most flexible choice. Figure on spending a fourth to a third more at any price level for a changer that's the performance equivalent of a similarquality single-play model.

The latest rage in CD land is the big-capacity changer. Models that accept twenty-four, fifty, a hundred, or even two hundred discs are now available. You will pay much more for jumbo changers that handle fifty or more discs, but in exchange you'll get bountful unattended-playback capability, long-term (or even permanent) library storage, and a wealth of cataloging/custom-playback features.

CD player specifications are particularly uninformative, as even the lowularly uninformative, as even the lowliest players generally perform extremely well in such areas as frequency response, noise, and distortion. In short, value your own perception of features, function, and construction (and sound) quality over any published snees you might encounter.

Home Theater. One last CD player genre deserves attention. If you have visions of a home theater in your future, take a long, hard look at CD/laserdisc combi-players. These hybrids function as conventional CD players but can also play laserdiscs-by a wide margin the best-quality source for recorded movies and videos. Combi-players generally carry a price premium of about 50 percent above comparable single-CD players, but they are well worth the stretch if serious home theater looms on your horizon. A few models even combine five-disc carousel CD-changer functionality with laserdisc playback.

Beyond CD

What about other components? Obviously, if you have a large collection of LP's and want to keep listing to them, a turntable is a necessary component of your system. Conversely, if you don't have any analoises, forget it. For those of us in between, the question is whether to concentrate on building and using a CD

collection, or to keep LP playback among our listening habits. Don't automatically sell the analog record short. While LPs are fast drying up on retail shelves, the format is capable of excellent sound, if a bit lower in dynamic range (noisier) than the CD. Remember, though, that money you set aside for a new turntable could be used to buy a bundle of CD's.

used a tomy abundant of that a word the S129 budget model: It probably won't sound particularly good and will liketly do less than the utmost to preserve your irreplaceable LP's. Consider 2500 a reasonable minimum for an expensive companies of the consideration of the combo. And the phono cartridge is every bit as imporant as the turniable itself—don't skimp on it. Analog rectored playback is one sphere where dollars can buy a clear sonic payoff: A all yaddibly superior to a \$200 setup.

Turntable specs will vary a good deal according to type (and measurement techniques), but a few numbers may prove useful. Look for rumble that's –70 dB (DIN) or lower (a bigger negative number), wow-and-fluter below about 0.08 percent (DIN), and a cartridge with full-range response (43 dB or better from 20 Hz to 20 kHz) and channel separation of at least 20 dB to 75.

If your system will be assembled around a receiver, radio is included. no questions asked. For separates buyers, including a tuner is often automatic. Either way, FM radio offers both no-brainer, all-day entertainment and serious listening opportunitiesincluding many live concert broadcasts. Choosing a tuner by the numbers is relatively safe: A lower total harmonic distortion (THD) and a higher signal-to-noise ratio (S/N) usually correlate well with audible gains in dynamic realism and definition; higher selectivity (especially adjacent-channel selectivity) should translate to better reception from fringe stations: lower capture ratio and higher AM suppression reduce distortion

from multipath interference.

Because of its inherently inferior
quality, AM radio is a forgotten medium today. Most audio buyers pretty
much ignore it—and the AM sections
of most receivers, including manypensive models, are woeful things.
But stereo AM broadcasts have become more widespread in recent
years, and a few home receivers can
now decode them.

Only five years ago, a tape deck meant cassettes. Today, you can select an analog cassette, DAT, or Digital Compact Cassette (DCC) tape deckor a MiniDisc (MD) recorder, Analog cassettes still rule the roost, in terms of both ubiquity and cost-effectiveness. For \$300 to \$400 you can buy a deck of remarkable sound quality; double your money and you can get a machine that approaches state-of-theart performance. For serious use, consider Dolby C noise reduction a prerequisite for top-grade sound. Flagship decks that include the new Dolby S system are definitely worthwhile where cassette recordings will be used as a critical music source.

Low-end, \$199-grade cassette machines are okay for casual playback of prerecorded tapes and making an occasional car tape, but don't expect to dub good CD's without hearing a noticeable difference on tape. This caveat includes most (though not all) dual-well "dubbing" decks, particularly in the lower price ranges. The only good reason to look at double decks is that you intend to do extensive tape copying (and dubbing prerecorded tapes is hardly worth the effort). If

not, stick to a one-well design. Analog-cassette specs can be difficult to compare because of variations in measurement techniques and in the tapes and test signals employed, so proceed with caution. Most midpriceand-up decks today deliver a frequency response of 20 Hz to 18 or 20 kHz ±3 dB. Signal-to-noise ratio (S/N) without noise reduction should be 55 to 60 dB; Dolby C should add about 20 dB to this figure, and Dolby S another 5 to 10 dB.

If your taping will be confined to self-made recordings and you are starting pretty much from scratch, consider DAT. Basic DAT decks are currently no more expensive than high-end cassette decks, and they offer pure. CD-quality recording and playback and CD-like track-indexing and search capabilities (though much slower than with CD's). Blank DAT's, however, are considerably more expensive than blank cassettes

In a sense, DCC decks offer the best of both worlds. You can make DAT/CD-quality digital tapes, yet still play back existing analog cassettes (though they may not sound as good as they would on a topnotch analogonly deck). You cannot, however, make new analog recordings. Finally, MiniDisc recorders-both portable and home-style-provide indefinitely repeatable recordability and erasability with all the speed and convenience of a disc-based medium, portability, and a long-term robustness no tape medium can match.

Whatever its type, a digital recorder should deliver performance that on paper very nearly matches that of your CD player, so specs will not be of much use. Get to know any digital tane or disc recorder by ear before you buy by listening critically over headphones to recordings of CD's.

Mood Processors

The range of signal processors (devices meant to enhance or modify music signals) that you can add to a basic hi-fi system is broad indeed, but at the top of the list is the surround-sound processor. Of course, if your system has been built around a surroundequipped A/V receiver, the point is moot. But with a traditional stereo setup you'll likely look to a surround processor first. Most standalone models provide Dolby Pro Logic decoding-the standard for motion pictures and videos-along with a few enhancement modes for music, monaural-TV, and other program sources. Higher-end DSP-equipped surround models add more elaborate ambience modes for music and additional movie modes. A standalone processor will require one or more companion amplifiers to drive a surround setup's additional speakers.

Processor-amplifiers are usually the best value: They not only provide surround functions but also include amplifier channels for extra speakers. There are typically three channels: one for the center speaker (ideally the power for it will match that going to the left and right front speakers) and two for surround speakers

Other stereo signal processors include graphic equalizers, dynamicrange enhancers, and bass-signal enhancers. Each of these types (and others) may have a place in your system. but generally none of them has to be included in a basic high-performance setup. If after extended use you determine that you want an equalizer-say, to help improve the sound of historic records or early tapes-or a bass-enhancer to pump up home parties, by all means shop the signal-processor ranks. But concentrate your attention (and dollars) on topnotch fundamental components, and in the long run the sonic payoff will be substantial.

BUYER'S CHOICE

here you buy may be as important as what you buy, if your shopping will include extensive critical listening, find a dealer whose demo rooms are intelligently laid out, tidy, and inviting. Then find a salesperson who is knowledgeable, patient, and intelligible. and stick with him or her. By the same token, don't waste a busy retailer's valuable time with casual listening sessions if you're not shopping seriously. Re sure to check prices and service at a few competing dealers around town, and don't be afraid to negotiate the best price once your system is set. But don't let a few dollars one way or the other determine your choice. Try-before-buy loans and trade-up options are worthwhite extras not all dealers offer. A year or two down the road, price differences will seem trivial, but a flexible and informative dealer won't

If you already have your system worked out and don't require any advice, mailorder or telephone shopping may be a convenient and money-saying alternative. Most mail-order houses are up-front operations, but a few caveats are in order. Make sure of make, model, and the price you're actually paying. Ask for a written confirmation of your order. Get a shipping date. Understand the return and refund/exchange time periods and policies. Is there an extra "restocking" or shipping charge for returns? Is the seller offering any warranty other than the manufacturer's? What is the maker's ouarantee? Is the mail-order house an authorized warranty repair station?

Finally, three cardinal rules of mail-

- order buying: 1. Be sure you're buying legitimate,
- U.S.-market goods
- 2. Know who you're dealing with: Get a full name and his or her position in the company, and keep copies of all transactions (take notes of phone conversations).
- 3. Buy by credit card only, and get an explicit agreement that your card will not be charged until the merchandise is actually shipped.



At one time vou understood how this worked.

FIVE BLOCKS MADE A COTTAGE, ten a castle, and a hundred your own private empire. With Linn components, it's just that simple. You can start out with the system that's right for you today and, using our building-block

approach, improve and ex-

in affordable steps. Some steps will improve the performance of your system, others will expand your sys-

tem throughout your home, but each and every step has one thing in common. It delivers more music. PEOPLE NEED MUSIC. Music is important. Exploring the world of music in the comfort of your own home is therapeutic. It will help you relax, stimulate your imagination, change your mood, and provide entertainment and pleasure for your whole family. A SOUND INVESTMENT. At our innovative factory in Scotland, we produce the most advanced and best sounding hi-fi. Skilled and dedicated people and our unique single-station-build philosophy ensure a standard of construction and reliabil-

ity simply not possible pand your system over time 1-800-LINN HI-FI on a production line. And, with your Linn remusic for life™

tailer on hand to provide assistance long after your initial purchase.

you can expect your hi-fi to last a lifetime. People who love music have built our business, so we look after them. Music For Your Life. To learn more about Linn Hi-Fi and the many ways in which Linn can make music a more important part of your life, phone Audiophile Systems, Ltd., our U.S. distributor, at 1-800-546-6443.



Putting a sound system together can be quite an adventure in the 1990's. Shopping for components is no longer an audio-only affair—audio and video come together through receivers with Dolby Po Logic surround-sound decoding, multichannel power amplifiers, speakers designed to recreate the cirema experience at home, and CD/laserdusc combi-players. But don't worry, there's still plenty of 'Traditional' audio equipment to choose from.

Whether you're just starting out or upgrading, our Buying Guide is a great first step, providing features, spees, and prices of hundreds of components.

in the following pages, you'll find a sampling of models in the key categories of equipment from companies whose prodcuts are widely distributed. (Recording equipment and blank media, both analog and digital, will be covered next month.) If a particular model or brand does not appear, that does not reflect on its quality. All information was provided by the

All information was provided by the manufacturers, and the prices given are suggested retail; actual selling prices may vary. For more information, contact the manufacturers (see the directory at the end of the Buying Guide) or their authonized dealers. Have fun. —Bob Ankosko



AMC

R4 65-W/ch Receiver 2 channels. 65 W x 2 into 8 ohms. 4 inputs including phono. Features microprocessor-based design. Remote volume and source selection. Amp: FR 20-20,000 Hz; S/N 78 dBA MM, 75 dBA MC, 85 dB line ... \$900



BANG & OLUFSEN The following feature dynamic output-level adiustment, auto scan tuning, direct station access, and Power Link connectors for Beolab powered speakers.

Beomaster 7000 50-W/ch RDS Receiver 2 channels, Integrates with Beosystem 7000, 50

W x 2 rms into 8 ohms with 0.09% THD. Radio Data System decoder for 10-character station labeling optional. Features multiroom capability; 20 AM/FM presets; clock/timer with battery backup: Beolink 7000 remote control. Amp: S/N 78 dBA phono, 80 dBA line. FM: 50-dB quieting sens 40 dBf; AM rej 57 dB; cap ratio 1.7 dB; adj-ch sel 10 dB; alt-ch sel 70 dB; S/N 70 dB. Polished-aluminum or white finish. 161/2 x 3 x 12¼ in; 19.2 lb... __\$3,000

Beomaster 4500 20-W/ch Receiver 2 channels, Integrates with Beosystem 4500, 20

W x 2 rms into 8 ohms with 0.1% THD. Multiroom capability; 20 AM/FM presets; programmable volume and tone levels; Beolink 1000 remote control. Wall-mount brackets optional. Amp: S/N 77 dB. FM: 50-dB quieting sens 19 dBf mono, 40 dBf stereo; cap ratio 1.7 dB; S/N 70 dB stereo. Polished aluminum finish with white trim. 24% x 214 x 9% in\$1,200

CARRERA CR-2530 30-W/ch Receiver

2 channels. 30 W x 2. Headphone jack with vol ume control. Amp: FR 20-20,000 Hz; THD 0.25%. FM: cap ratio 1.7 dB; alt-ch sel 58 dB. \$200

CARVER

HR-895 365-W A/V Receiver 5 channels, Dolby Pro Logic. 110 W x 2 mms (front) + 75 x 1 rms (center) + 35 x 2 rms (rear), all into 8 ohms from 20-20,000 Hz with 0.1% THD. 7 audio inputs; 4 composite-video inputs; 3 S-video inputs; front-panel composite/S-video A/V input; headphone jack; 4 AC outlets. Features multipath-suppression and ambience-enhancement circuitries. Multiroom capability; 4 surround modes: 30 AM/FM presets: FM-mono switch; auto/manual tuning; signal-strength indicator; timer; programmable remote control. Includes infrared receiver and second remote control. Amp: S/N 80 dBA MM. FM: AM rej 65 dB: can ratio 2 dB: alt-ch sel 70 dB: S/N 78 dB stereo; THD 0.2% at 1,000 Hz\$1,250

HR-875 295-W A/V Receiver

5 channels, Dolby Pro Logic, 75 W x 3 (left, right, center) plus 35 x 2 (rear). 6 audio inputs: 3 composite-video inputs; multiroom-speaker outputs: 2 video-monitor outputs; pre-out/mainin loops for each channel: line-level subwoofer output; multiroom output for infrared receiver. Features 12-dB/oct subwoofer crossover at 70 Hz. 3 surround modes; adjustable time delay (5-40 ms); adjustable Dolby surround delay (15-30 ms); 30 AM/FM presets with 5-character station labeling; remote control.

HR-742 80-W/ch Receiver

2 channels, 80 W x 2 into 8 ohms or 130 x 2 into 4 ohms from 20-20,000 Hz with 0.09% THD, 6 audio inputs; 3 video inputs; 2 video outputs; switchable cable/antenna inputs; pre-out/main-in loops; headphone jack; 2 AC outlets. Features multipath-suppression and ambience-enhancement circuits: motor-driven volume control. 30 AM/FM presets with scan; auto/manual tuning; remote control. S/N 80 dBA MM. FM: AM rej 62 dB; cap ratio 2.2 dB; alt-ch sel 65 dB, 19 x 514 x 151/2 in...

DENON

AVR-3000 400-W A/V Receiver

5 channels, Dolby Pro Logic, DSP, 110 W x 3 (front. center) + 35 x 2 (rear), all into 8 ohms. 9 audio inputs; 5 video inputs; 4 S-video inputs; 10 audio outputs: 3 video outputs: 3 S-video outputs; 2 center-channel outputs. Features 4 Dolby modes: wide-screen, live, mono-movie, classic, rock, church, jazz, stadium, and matrixsurround DSP modes; bass boost; dialog-enhancing EQ; auto input balance for Dolby Pro Logic; adjustable delay and room-size parameters; 16 AM/FM presets; nonvolatile memory for control settings; basic-function and programmable remote controls ... AVR-2000, As above, 80 W x 3 (front, center) + 25 x 2 (rear). No bass boost, dialog-enhancing EO, or basic-function remote, 6 audio inputs; 3 video inputs; 2 S-video inputs; 2 video outputs; 2 S-video outputs...

AVR-1000 250-W A/V Receiver

5 channels, Dolby Pro Logic, DSP. 70 W x 3 (left, right, center) + 20 x 2 (rear), all into 8 ohms. 3 video inputs; 2 video outputs; 6 audio inputs: 6 audio outputs. Features 3-pole-equivalent tuner front end. 4 Dolby modes; wide screen, mono movie, classic, rock, and stadium modes; adjustable time delay; auto input balance for Dolby Pro Logic; 16 AM/FM presets; auto-seek and manual-step tuning; record-out selector, dubbing capability; nonvolatile control-setting memory; fluorescent display; Denon IS-system remote control

AVR-800 210-W A/V Receiver 5 channels, 4 Dolby Pro Logic modes. 60 W x 3

(left, right, center) + 15 x 2 (rear), all into 8 ohms. 2 video inputs; 2 video outputs; 5 audio inputs; 2 audio outputs. Features 3-pole-equivalent tuner front end. Hall and studio modes; adjustable time delay; auto input balance for Dolby Pro Logic; 16 AM/FM presets; auto-seck and manual-step tuning; nonvolatile control-setting memory; fluorescent display; Denon ISsystem remote control\$500

DRA-545R 60-W/ch Receiver 2 channels. 60 W x 2 into 8 ohms from 2020,000 Hz with 0.05% THD, 2 video inputs; 2 video outputs: line-level outputs. Features 16 AM/FM presets; auto-seek and manual-step tuning; last-station memory; variable loudness control; last-function memory; Denon IS-system remote control, Amp: S/N 78 dB MM, 95 dB line.

CR-5950RC 70-W/ch Receiver

2 channels, 70 W x 2 cont avg into 8 ohms at 1.000 Hz or 130 x 2 into 4 ohms, 6 inputs including phono; gold-plated phono and CD inputs. Features Class A amplification; brushed metal housing; motor-driven volume control. 16 AM/FM presets; FM-stereo muting; auto/manual station scan; bass, treble, balance, and loudness controls; remote control. Amp: S/N 75 dB phono, 95 dB line ...

The following feature 40 AM/FM presets and a

remote control. Common FM specs include 50dB quieting sens 16.1 dBf mono, 40 dBf stereo; AM rei 55 dB; cap ratio 1.5 dB; alt-ch sel 50 dB.

RS-737 280-W A/V Receiver 5 channels, Dolby Pro Logic. 80 W x 3 (left,

right, center) + 20 x 2 (rear), all into 8 ohms at 1,000 Hz with 0.9% THD, or 120 x 2 rms into 8 ohms from 20-20,000 Hz with 0.05% THD, 5 audio inputs including MM phono; front- and rear-panel A/V inputs; I unswitched and 2 switched AC outlets. Selectable 15-, 20-, 25-, or 30-ms digital delay; 7-band EQ; A/V switching. Amp: S/N 70 dBA phono, 90 dBA line. 161/2 x 6½ x 14½ in; 27 lb. RS-727. As above, 100 W x 2 (left, right) rms + 20 x 1 (center) rms + 10 x 2 (rear) rms. 2 video inputs: 2 switched AC outlets, Amp: S/N 70 dBA phono, 90 dBA line. 16½ x 6½ x 15 in; 26 lb

RS-717 80-W/ch Receiver 2 channels, 80 W x 2 rms into 8 ohms from 20-20,000 Hz with 0.9% THD. 5 audio inputs including MM phono. Bass and treble controls. Amp: S/N 70 dBA phono, 90 dBA line, 161/2 x

HARMAN KARDON AVR30 190-W A/V Receiver

616 x 1316 in ...

5 channels, Dolby Pro Logic, DSP, 50 W x 3 into 6 ohms from 20-20,000 Hz with 0.09% THD (front, center) + 20 W x 2 into 4 ohms from 100-10,000 Hz with 0.3% THD (rear) or 60 W x 2 into 6 ohms from 20-20,000 Hz with 0.09% THD. 4 video inputs; 2 VCR monitors; 4 audio inputs; 2 tape monitors, 4 room-size settings; 5 effects levels; 12-way dubbing matrix; simulcast capability; memory presets for surround and DSP settings; 16 AM/FM presets; on-screen displays; remote control....

AVR15 110-W A/V Receiver 5 channels, Dolby Pro Logic. 30 W x 3 (left,

right, center) + 10 x 2 (rear), 35 x 2 into 8 ohms, or 45 x 2 into 4 ohms. 1 video input; 3 audio inputs: 2 VCR monitors, Dolby Time Link digital-delay system; 30 tuner presets: audio-direct mode; video switching; system remote control...

HK3500 50-W/ch Receiver 2 channels. 50 W x 2 into 8 ohms from 2020,000 Hz with 0.09% THD, 7 inputs/outputs including subwoofer; dual tape- and video-monitor loops. Features motor-driven volume control. 7-way tape-copy selector: 16 AM/FM presets: seek tuning: subwoofer-level control: loudness, mono, and subsonic-filter switches; remote control. S/N 78 dBA phono, 98 dBA line. FM: 50-dB quieting sens 37.2 dBf stereo; cap ratio 1.5 dB; adj-ch sel 10 dB; alt-ch sel 75 dB. 17% x 41/4 x 131/2 in... \$599 HK3400. As above, 6 inputs. 35 W x 2 \$479

JVC

The following feature Compu Link presets to store and recall 3 sets of volume, balance, EQ. surround, loudness, and ambience settings for each program source and tuner preset.

RX-905VTN 370-W A/V Receiver

5 channels, Dolby Pro Logic, DSP. 120 W x 2 with 0.007% THD (front) + 70 x 1 (center) + 30 x 2 (rear) with 0.7% THD, all rms into 8 ohms. 3 video inputs: 2 S-video terminals: video-monitor output; outputs for 2 pairs of front speakers; subwoofer output: headphone iack. Features Super A amp circuitry for Class A sonic characteristics. Hall, pavilion, stadium, and live-club digital ambience modes; 7-band graphic EQ with 5 programmable and 5 factory presets; 40 AM/FM presets with 5-letter labeling; adjustable digital delay; on-screen displays; programmable remote control. Amp: FR 5-50,000 Hz +0, -1 dB line. FM: 50-dB quieting sens 38.3 dBf stereo; cap ratio 1.5 dB. 171/4 x 61/4 x 151/2 in: 28 lb.

RX-809VTN 345-W A/V Receiver

5 channels, Dolby Pro Logic. 120 W x 2 (front) + 65 x 1 (center) + 20 x 2 (rear) with 0.007% THD, all rms into 8 ohms, 2 video inputs; headphone jack. Features Super A amp circuitry. 7band graphic EQ with 5 programmable and 5 factory presets. 40 AM/FM presets with 5-letter labeling for 20 stations; adjustable digital delay; programmable remote control. FR 5-50,000 Hz +0, -1 dB line. FM: 50-dB quieting sens 38.3 dBf stereo; cap ratio 1.5 dB; S/N 73 dB stereo. 17½ x 6½ x 15 in: 25 lb. \$650

RX-509VTN 220-W A/V Receiver

5 channels, Dolby Pro Logic. 80 W x 2 (front) into 8 ohms with 0.06% THD + 20 x 3 (center, rear) into 8 ohms with 0.7% THD. Line-level center-channel output; 2 video inputs: headphone jack. 7-band graphic EQ with 5 programmable and 5 factory presets; 40 AM/FM presets with 4-letter labeling for 20 stations; adjustable digital delay: A/V remote control. Amp: FR 10-30,000 Hz ±1 dB line. FM: 50-dB quieting sens 38.3 dBf stereo; cap ratio 1.5 dB; S/N 73 dB stereo, 171/4 x 5 x 13 in; 171/4 lb.,

KENWOOD KR-V8050 265-W A/V Receiver

5 channels, digital Dolby Pro Logic, DSP, 75 W x 3 (front, center) + 20 x 2 (rear) or 120 x 2 ms into 8 ohms with 0.06% THD. 2 sets of video inputs/outputs; 6 sets of line-level outputs. 4 user surround presets: 20 AM/FM presets: vid-

KR-V7050 235-W A/V Receiver 5 channels, digital Dolby Pro Logic, DSP, 65 W

x 3 (front, center) + 20 x 2 (rear) or 100 W x 2 rms into 8 ohms with 0.06% THD, 2 sets of video inputs/outputs. Features motor-driven volume control, 4 user surround presets: 20 AM/FM presets; video-dubbing capability; remote control. 171/4 x 57/4 x 151/4 in KR-V6050, As above, without DSP, Dolby Pro Logic not digital ...

KR-V5550 230-W A/V Receiver

4 channels, Dolby Surround, 100 W x 2 (front) + 15 x 2 (rear) or 100 x 2 rms into 8 ohms with 0.06% THD. 2 sets of video inputs/outputs; Dolby Time Link digital-delay system: 10 AM/20 FM presets; video-dubbing capability; remote control. 17% x 5% x 15 in...

KR-A5050 100-W/ch Receiver

2 channels, 100 W x 2 rms into 8 ohms from 20-20,000 Hz with 0.09% THD, CD-direct input. Features motor-driven volume control, 10 AM/20 FM presets with scan; loudness switch; \$229 remote control. 17% x 5% x 15 in.....



Mitsubishi HTS-300 MARANTZ

SR-92 365-W A/V Receiver

5 channels, Dolby Pro Logic. 110 W x 2 from 20-20,000 Hz (front) + 75 x 1 from 40-20,000 Hz (center) + 35 x 2 from 40-20,000 Hz (rear). all rms into 8 ohms. 4 video inputs including front-panel S-video, composite-video and audiinputs; S-video and composite-video inputs and outputs; line-level subwoofer output; 5 preout/main-in loops. Features wideband AM reception: motor-driven volume control. Multiroom capability: hall, matrix, and simulated-stereo surround modes; adjustable digital delay; Dolby test-tone generator; 30 AM/FM presets with wide/narrow IF memory; programmable remote control. Amp: S/N 75 dB MM, 82 dB line. FM: cap ratio I dB; alt-ch sel 60 dB wide, 70 dB na row: S/N 68 dB and THD 0.5% stereo at 1.000 Hz. 17% x 5% x 15 in; 34 lb., \$1,149

SR-73 295-W A/V Receiver

5 channels, Dolby Pro Logic, 75 W x 3 (left, right, center) + 35 x 2 (rear), all rms into 8 ohms, or 75 x 2 rms into 8 ohms from 20-20,000 Hz with 0.9% THD. 4 audio inputs; 3 video inputs including 2 VCR loops; line-level outputs for each channel. Features 2-ohm load capability: motor-driven volume control. Adjustable digital delay; bass EQ optimized for movie soundtracks; 5 signal-processing presets; video dubbing capability; center- and rear-channel level controls; 30 AM/FM presets; programmable A/V remote control. Amp: S/N 94 dB phono. 104 dB line. FM: 50-dB quieting sens 11.2 dBf mono. 35.2 dBf stereo; cap ratio 1 dB; alt-ch sel 65 dB, 161/2 x 51/4 x 131/2 inc 21 lb.,

SR-53 45-W/ch Receiver 2 channels, 45 W x 2 rms into 8 ohms from 20-

20,000 Hz with 0.5% THD, 60 x 2 into 4 ohms from 20-20,000 Hz with 0.9% THD, or 100 x 2 max into 2 ohms. Phono input: switched AC outlets: RC-5 remote-control interface. Features discrete output transistors; motor-driven volume control. Bass EO; 30 AM/FM presets with auto/manual store: remote control. Amn: S/N 80 dBA phono, 90 dBA line. FM: 50-dB quieting sens 35.2 dBf stereo; cap ratio 1 dB; alt-ch sel 65 dB. 161/2 x 51/4 x 141/4 in; 16 lb........\$349

MITSUBISHI HTS-300 400-W A/V Receiver

5 channels, Dolby Pro Logic. 100 W x 3 (front, center) + 50 x 2 (rear), all rms into 8 ohms with 1% THD. Line-level output for each channel; subwoofer, multiroom, monitor, 3 record, and 3 S-video record outputs; 2 front-panel inputs; headphone jack. Features video processor with digital dynamic comb-filter, Stadium, club, and theater surround modes; Dolby Time Link digital-delay system; 16 AM/FM presets with labeling; tone controls; on-screen displays; programmable remote control. 16% x 6% x 16% in; 30 lh \$1,600

The following feature Power Envelope circuitry to increase dynamic headroom and Soft Clipping circuitry to prevent distortion.

Model 7100X 60-W/ch Receiver

2 channels. 60 W x 2 cont avg into 8 ohms from 20-20,000 Hz with 0.03% THD, Gold-plated phono inputs; pre-out/main-in loops for each channel. Features MM/MC phono stage: switchable infrasonic filter, Bass EO: 14 AM/ FM presets; remote control. Amp: S/N 75 dB MC, 94 dB line. FM: cap ratio 1.6 dB; alt-ch sel 70 dB, 171/s x 41/s x 151/s in; 24 lb.,

Model 705 40-W/ch Receiver

2 channels. 40 W x 2 cont avg into 8 ohms with 0.03% THD. 7 line-level inputs; 2 tape-monitor loops; buffered multiroom output; 5-way binding posts. Features independent listen/record capability: 39 AM/FM presets: dual-resolution manual and auto-seek tuning: A/B speaker switching: re-mote control. Amp: S/N 76 dB phono, 90 dB line, FM: 50-dB quieting sens 35 dBf stereo; cap ratio 1.8 dB; alt-ch sel 60 dB.

Model 701 25-W/ch Receiver

2 channels, 25 W x 2. Infrared-repeater input for multiroom applications; switchable phono/ I innut. 20 AM/FM presets: remote control. \$349

NAKAMICHI

AV-1 310-W A/V Receiver 5 channels, Dolby Pro Logic. 100 W x 2 (front) + 50 x 1 (center) + 30 x 2 (rear) into 8 ohms with 0.1% THD. A/V inputs/outputs; video connectors including S-video; pre-out/main-in loops; mono line-level output. Features motordriven volume control. Spatial-mode, delaytime, balance, center-level, rear-level, and tone controls; direct station access; 30 AM/FM presets; speaker selector; programmable ren control. Amp: FR 10-70,000 Hz +1, -3 dB; S/N 78 dB, FM: 50-dB quieting sens 37.5 dBf ste S/N 70 dB. 17 x 5½ x 14 in; 31 lb\$1,200 AV-2. As above, 70 W x 2 (front) + 35 x 1 (center) + 20 x 2 (rear) into 8 ohms with 0.1% THD. Without S-video connectors or programmable remote control...

RE-1 80-W/ch Receiver 2 channels, 80 W x 2 into 8 ohms, Pre-out/

main-in loops; 3 video inputs; 2 video outputs;

speaker terminals; A/V inputs/outputs. Features 10 AM/FM presets; auto seek/manual tuning; loudness control; defeatable gain control; tone control; muting; signal-strength meter; monitor/record-out selectors: fluorescent display: remote control. Amp: FR 20-20,000 Hz +0. -0.5 dB; THD 0.008%; S/N 78 dB, FM; 50-dB quieting sens 37.5 dBf stereo; cap ratio 2 dB. 16 x 3 x 14 in; 26 lb.... 5899 RE-2. As above, 55 W x 2 into 8 ohms, No video inputs/outputs. Single tape-monitor loop.



ONKYO

20 lb

Integra TX-SV909PRO 450-W A/V Receiver 7 channels, digital Dolby Pro Logic. 110 W x 3 (front, center) + 30 x 2 (rear) + 30 x 2 (front enhance) or 110 x 2 rms into 8 ohms. 5 audio inputs; 6 S-video inputs; fiber-optic digital input; 5 audio outputs; 3 S-video outputs; line-level front, rear, center-channel, front-enhance, and subwoofer outputs; 5-way binding posts; goldplated terminals. Features 3 power transformers Ambisonic surround decoder; 8 surround modes; 40 AM/FM presets; 6 preset groups with scan; direct station access; A/V and audioonly record selectors; video dubbing capability; source-direct switch: Onkyo RI-system compatibility; on-screen displays; programmable re-mote control. Amp: FR 20-20,000 Hz; THD 0.04%. 18 x 7½ x 16¾ in: 49 lb.

TX-SV717PRO 315-W A/V Receiver 5 channels, Dolby Pro Logic. 85 W x 3 rms (front, center) + 30 x 2 (rear) or 110 x 2 rms. 6 audio and 4 video inputs: line-level front, rear, center-channel, and subwoofer outputs; 5-way binding posts; headphone jack. Hall and matrix surround modes; adjustable digital delay; 40 AM/FM presets; 6 preset groups; direct station access; FM-mute and tuning-level switches; timer; Onkyo RI-system compatibility; onscreen displays; programmable remote control. Amp: FR 20-20,000 Hz; THD 0.08%. 18 x 6% x 151/4 in: 301/2 lb \$950

TX-SV515PRO 205-W A/V Receiver 5 channels, Dolby Pro Logic. 55 W x 3 rms (front, center) + 20 x 2 (rear) or 80 x 2 rms. 7 audio and 3 video inputs; line-level centerchannel output: headphone iack. Hall surround mode; adjustable digital delay; 40 AM/FM presets; 6 preset groups; FM-mute and tuning-level switches; sleep timer; Onkyo RI-system compatibility; programmable remote control. Amp: FR 20-20,000 Hz; THD 0.08%, 18 x 6¼ x 15¼ in: 30 lb.

TX-930 60-W/ch Receiver

2 channels, 60 W x 2 rms into 8 ohms or 120 x 2 max into 3 ohms. 6 audio inputs; outputs for 2 pairs of speakers. Features auto tuner reception optimization system. Logic-controlled keys: 40 AM/FM presets with battery-free backup; 6 preset groups; direct station access; loudness control; sleep timer; Onkyo RI-system compatibility; remote control. Amplifier section: FR 40-20,000 Hz: THD 0.2%, 18 x 41/4 x 121/2 in:

OPTIMUS BY RADIO SHACK STAV-3400 290-W A/V Receiver

5 channels, Dolby Pro Logic, DSP. 70 W x 3 (front, center) + 40 x 2 (rear), all into 8 ohms at 1,000 Hz with 0.8% THD, or 110 x 2 rms. Inputs for 2 line-level sources, phono, two tape decks, 2 VCRs, and TV/monitor; front-panel A/V input; TV/monitor output; line-level outputs for each channel; headphone iack, Jazz, church, dance, hall, theater, and Pro Logic theater sound fields; modifiable sound-field parameters with memory and recall; simulatedstereo mode; adjustable digital delay; Dolby 3 Stereo mode; memory for 5 bass/treble settings; video dubbing capability; 30 AM/FM presets; bass, treble, and loudness controls; timer; programmable remote control. Amp: S/N 97 dB line. FM: 50-dB quieting sens 37 dBf stereo; cap ratio 1 dB; alt-ch sel 65 dB; S/N 76 dB stereo. 16% x 6% x 16 in...

STAV-3270 220-W A/V Receiver

5 channels, Dolby Pro Logic. 60 W x 3 (front, center) + 20 x 2 (rear) or 80 x 2 into 8 ohms from 20-20 000 Hz with 0.09% THD, 4 line-level inputs; phono input; 2 tape loops; one unswitched and 2 switched AC outlets. Studio and simulated-surround sound fields; simulated-stereo mode: adjustable digital delay: direct station access; 30 AM/FM presets with scan; bass, treble, and extended-bass controls; remote control. Amp: S/N 72 dB phono, 96 dB line, FM: 50-dB sieting sens 38.6 dBf stereo; alt-ch sel 50 dB; S/N 70 dB stereo. 16% x 5% x 13% in....

STAV-3170 240-W A/V Receiver 4 channels, Dolby Surround. 100 W x 2 (left.

right) into 8 ohms with 0.09% THD + 20 x 2 (rear) into 8 ohms at 1,000 Hz with 0.8% THD. 5 line-level inputs; phono input; VCR and TV/ monitor outputs; 2 tape loops. Adjustable digital delay: studio and simulated sound fields: sim lated-stereo mode; direct station access; 30 AM/ FM presets with scan; extended-bass control; remote control. Amp: S/N 77 dB phono, 96 dB line. FM: 50-dB quieting sens 38.6 dBf stereo; cap ratio 1 dB; alt-ch sel 50 dB; S/N 70 dB stereo. 16% x 5½ x 13% in...

STA-2180 70-W/ch Receiver

2 channels. 70 W x 2 cont avg into 8 ohms from 20-20,000 Hz with 0.8% THD, 5 line-level inputs; phono input; 2 tape loops; switched AC outlet, 5-band EQ; 30 AM/FM presets; direct station access; remote control. Amp: S/N 72 dB phono, 96 dB line. FM: 50-dB quieting sens 38.6 dBf stereo; alt-ch sel 50 dB; S/N 70 dB stereo. 16% x 5% x 11% in ...

PHILIPS

The following feature a 900 Series bus system and 30 AM/FM presets.

FR-940II 280-W A/V Receiver

5 channels, Dolby Pro Logic, 100 W x 2 (front) + 40 x 1 (center) + 20 x 2 (rear), all into 8 ohms, 8 audio and 4 video inputs; 2 audio and 2 video outputs: line-level center-channel outputs. Features dual-room capability; auto fan cooling 5 surround modes: 30 AM/FM presets; 4 digital-delay settings; video dubbing capability mote control. Amp: FR 20-20,000 Hz: THD 0.09%: S/N 88 dB. FM: S/N 68 dB. 171/4 x 41/4 x 11% in; 18 lb ...

FR-930II 200-W A/V Receiver 5 channels, Dolby Pro Logic. 70 W x 2 (front) +

20 x 1 (center) + 20 x 2 (rear), all into 8 ohm 7 audio and 3 video inputs; 2 audio and 2 video outputs: line-level center-channel outputs. Features dual-room capability; auto fan cooling. 5 surround modes; 30 AM/FM presets; 4 digitaldelay settings; video dubbing capability; rer control. Amp: FR 40-20,000 Hz; THD 0.07%; S/N 88 dB, FM; S/N 68 dB, 171/4 x 47/4 x 117/4 in; 18 lb.

PIONEER

uto source control refers to one-touch poweron and auto recall of 2 source components with their previous operating parameters.

VSX-D2S 300-W A/V Receiver

5 channels, digital Dolby Pro Logic decoder and preamp, DSP, 70 W x 3 cont avg (front) + 45 x 2 (rear) or 125 x 2 cont avg. S-video inputs and outputs. Features graphics-based on-screen user interface using icons and menus; digital preamp, parameteric and graphic EQ's, and dynamicrange compressor; video-edit mode with A/V source mixing and fading; multiroom/multisource capability. Sound-field processor has 15 movie, 42 concert, and 15 sports modes; 4 useradjustable presets. ..

VSX-D1SII 415-W A/V Receiver

5 channels, digital Dolby Pro Logic, DSP. 130 x 2 cont avg (front) + 55 x 1 (center) + 50 x 2 (rear) or 70 x 3 (front, center) + 55 x 2 (rear), 6 video and 6 audio inputs including phono; front-panel composite/S-video A/V input; 4 S-video inputs and 3 S-video outputs; 2 VCR loops; video-processor loop; pre-out/main-ir loops for all channels: 2 mono center-channel outputs; subwoofer output; headphone jack. Features multiroom/multisource capability: 5 preset sound fields; Dolby 3 Stereo and simulated-stereo modes; auto input balance for Dolby Pro Logic: adjustable digital delay: 5 user ambience presets; record-out selector; split-screen video enhancer with 5 preset levels; 30 AM/FM presets; digital 3-band EQ; fluorescent display; jog dial; illuminated programmable SR-system A/V remote control. Amp: FR 5-100,000 Hz +0, -3 dB line; S/N 80 dB line. FM: 50-dB quieting sens 37 dBf stereo; cap ratio 1 dB; alt-ch sel 65 dB; S/N 76 dB at 85 dBf stereo. 16% x 61/4 x 18 in; 33 lb ...

VSX-D702S 290-W A/V Receiver

5 channels, digital Dolby Pro Logic, DSP. 70 W x 3 (front, center) + 40 x 2 (rear) or 110 x 2 cont avg. 5 video and 5 audio inputs including phono: 2 audio and 2 video outputs: 2 centerchannel outputs; line-level outputs for each channel; front-panel A/V input; video-monitor output: S-video connectors: headphone iack. Multiroom capability; jazz, dance, church, hall, theater, and simulated-surround sound fields; Dolby 3 Stereo and simulated-stereo modes: auto input balance for Dolby Pro Logic; auto source control; surround-parameter memory and recall: acoustic memory for 5 bass/treble responses: adjustable digital delay; video dubbing capability; 30 AM/FM presets; direct station access; timer; on-screen displays; illuminated pro-grammable SR-system A/V remote control. Amp: FR 5-100,000 Hz +0, -3 dB line; S/N 80 dB line. FM: 50-dB quieting sens 37 dBf stereo; cap ratio 1 dB; alt-ch sel 65 dB; S/N 76 dB at 85 dBf stereo, 16% x 6% x 16 in; 23 lb......\$845

VSX-512S 250-W A/V Receiver 5 channels, Dolby Pro Logic. 70 W x 3 (front, center) + 20 x 2 (rear) ior 100 x 2 cont avg. 4



Channel Speakers Deliver
Optimum Pro Logic Performance
At Factory-Direct Prices.

Cambridge SoundWorks sells two speakers designed by Henry Kloss specifically for use as center channel speakers in Dolby Surround Pro Logic systems-the Center Channel and Center Channel Plus. Our experience with Dolby Surround Pro Logic systems has shown that the center channel is very important. A significant portion of movie soundtracks is directed to the center channel. It's crucial to use a speaker that reproduces that material



accurately, with the proper volume level and dispersion pattern.

Center Channel by Henry Kloss.

Center Channel is a compact, two-way acoustic suspension speaker with a 4" woofer and a ring radiator tweeter. Because of its compact size (8%"×5%"×4"), it's simple to place Center Channel directly on top of or below your TV screen, so that dialog and sound effects will seem to emanate from their on-screen source.

Center Channel is well shielded magnetically so that it can be placed very close to your TV without causing video interference. Acoustically identical to our Ensemble satellite speakers, it's ideal for center channel use in a Pro Logic system. The factory-direct price of Center Channel is \$149.

Center Channel Plus by Henry Kloss.

The Center Channel Plus is a larger speaker recommended for achieving theaterlike playback levels in the most sophisticated and powerful home theater systems. It uses

four 3" long-throw woofers and a tweeter that perfectly matches the acoustics of our Ensemble and Ensemble II systems. The frequency range of the outer pair of 3" woofers is intentionally limited to maintain proper

dispersion characteristics. Because of its wide, low profile (25"

wide, 4" high, 61/4" deep), Center Channel Plus is ideal for placement directly on top of or, uniquely for a product of its type, beneath a TV-with optional support unit, it can act. as a base for your TV. We don't know of any speaker, at any price, that outperforms Center Channel Plus. The factory-direct price of Center Channel Plus is \$219.

For A Free Catalog, Call

We Know How To Make Loudspeakers.

154 California St., Suite 102F, Newton MA 02159 1-800-367-4434 Rex: 617-332-9229 Canada: 1-800-525-4634 Outside U.S. or Canada: 617-332-5936



video and 5 audio inputs including phono; 2 audio and 2 video outputs; line-level center- and rear-channel outputs: video-monitor output: outputs for 2 front speaker pairs; headphone jack. Multiroom capability: Dolby Time Link digital delay; auto input balance for Dolby Pro Logic; Dolby 3 Stereo, studio/simulated surround, and simulated-stereo modes; acoustic memory for 5 bass/treble responses; 30 AM/FM presets; direct station access; timer; programmable SR-system remote control. Amp: FR 5-100,000 Hz +0.5, -3 dB line; S/N 80 dB line. FM: 50-dB quieting sens 37 dBf stereo; cap ratio 1 dB; alt-ch sel 65 dB; S/N 76 dB at 85 dBf stereo. 161/4 x 61/4 x 16 VSX-502. As above without programmable re-

VSX-452 220-W A/V Receiver 5 channels, Dolby Pro Logic. 60 W x 3 cont avg

(left, right, center) + 20 x 2 or 80 x 2. 4 audio and 2 video inputs; line-level center-channel output; 2 audio and 2 video outputs; videomonitor output; headphone jack. Multiroom capability: Dolby Time Link digital delay: auto nput balance for Dolby Pro Logic; Dolby 3 Stereo, studio/simulated surround, and simulated-stereo modes; 30 AM/FM presets with scan; direct station access; timer; fluorescent display; SR-system A/V remote control. Amp: FR 10-70,000 Hz +0.5, -3 dB line; S/N 79 dB line. FM: 50-dB quieting sens 38.6 dBf stereo; alt-ch sel 50 dB; S/N 70 dB at 85 dBf stereo. 16% x 5% x 13% in; 18 lb.

SX-312R 70-W/ch Receiver

2 channels. 70 W x 2 cont avg or 145 x 2 into 2 ohms, 6 inputs including phono; outputs for 2 speaker pairs; headphone jack. 30 AM/FM presets divisible into 3 groups with group scan; di-rect station access; 5-band graphic EQ; timer; fluorescent display; SR-system remote control. Amp: FR 20-20,000 Hz ±0.5 dB phono, 10-70.000 Hz +0.5, -3 dB line; S/N 75 dB phono, 79 dB line. FM: 50-dB quieting sens 38.6 dBf stereo: alt-ch sel 50 dB: S/N 70 dB at 85 dBf stereo. 16\% x 5\% x 11\% in; 13 lb

VSX-97 300-W A/V Receiver 5 channels, digital Dolby Pro Logic decoder and preamp, DSP. 70 W x 3 cont avg (front) + 45 x 2 (rear) or 125 x 2 cont avg. S-video inputs and outputs. Features graphics-based on-screen user interface using icons and menus; proprietary Legato Link converter system said to improve musicality by reconstituting frequencies above 20 kHz; digital preamp, parameteric and graphic EQ's, and dynamic-range compressor; videoedit mode with A/V source mixing and fading: direct signal-path switch. Sound-field processor has 15 movie, 42 concert, and 15 sports modes; 4 user-adjustable presets; multiroom/mult source capability. Rosewood side panels..\$2,600

VSX-52 190-W A/V Receiver

5 channels, Dolby Pro Logic, 50 W x 3 (front, center) + 20 x 2 cont avg (rear) or 100 x 2. 4 audio and 4 video inputs; line-level outputs for each channel; headphone jack; gold-plated terminals, Multiroom/multisource capability; Dolby Time Link digital-delay system; simulated/ studio surround, simulated-stereo, and Dolby 3 Stereo modes; adjustable digital delay; video dubbing; 30 AM/FM presets with labeling; di-rect station access; A/B speaker switching; timer; on-screen displays; SR-system remote con-trol. FM: 50-dB quieting sens 37 dBf stereo; cap ratio 1 dB; alt-ch sel 65 dB at 400 Hz; S/N 76 dB at 85 dBf stereo. 171/4 x 61/4 x 161/2 in;

SX-31 100-W/ch Receiver

2 channels, 100 W x 2 into 8 ohms from 20-20,000 Hz with 0.03% THD or 230 x 2 into 2 ohms. 6 audio inputs including phono and goldplated CD inputs. Features source-direct mode. Multiroom capability; 30 AM/FM presets with scan: mute and loudness switches: SR-system remote control. FM: 50-dB quieting sens 38.1 dBf stereo; cap ratio 1 dB; alt-ch sel 55 dB at 400 Hz; S/N 73 dB at 85 dBf stereo. 16% x 5% x 131/4 in; 17 lb...

RCA

RV3761F 280-W A/V Receiver 7 channels, Dolby Pro Logic, DSP, 60 W rms x 3 (front, center) + 25 W rms x 4 (front enhance. rear). 4 video and 5 audio inputs; front-panel A/V input; headphone jack. Simulated, cinema, theater, stadium, studio, and rock DSP modes; variable surround parameters with memory for 8 settings per A/V source: adjustable delay: 30 AM/FM presets; fluorescent display; level meters; remote control. Amp: FR 8-100,000 Hz

+1, -3 dB line; S/N 95 dBA line ...

RV3651F 210-W A/V Receiver 5 channels, Dolby Pro Logic. 60 W rms x 3 (front, center) + 15 W rms x 2 (rear), 3 video and 4 audio inputs: headphone tack. Features PLL digital tuning. Dolby 3 Stereo and concert-hall modes; adjustable delay time; 30 AM/FM presets; test-tone generator; timer; bass and treble controls; remote control. Amp: FR 40-20,000 Hz ±1 dB; S/N 80 dBA...

ROTEL

RX950AX 50-W/ch Receiver 2 channels. 50 W x 2 cont avg into 8 ohms from 20-20.000 Hz with 0.03% THD. 5 inputs; headphone iack, Auto/manual tuning: 16 AM/FM presets; mono switch; tone defeat; illuminated preset buttons and volume control; remote control. FM: 50-dB quieting sens 14.8 dBf mor 37.2 dBf stereo; cap ratio 1 dB; alt-ch sel 60 dB; S/N 80 dB mono, 75 dB stereo; THD (65 dBf, 1,000 Hz) 0.07% mono, 0.25% stereo. 17½ x 4½ x 13½ in...



RCA RV3651F

SANSUI

RZ-9500AV 300-W A/V Receiver 5 channels, Dolby Pro Logic, DSP. 100 W x 2 (front) + 40 x 1 (center) + 30 x 2 (rear), all cont avg into 8 ohms with 0.02% THD. 4 audio and 3 video inputs; rear and center line-level outputs: speaker-level inputs: tape-monitor loop, 3 surround modes: 4 surround presets: adjustable digital delay; test-tone generator, electronic tone controls; source-direct switch; 30 AM/FM presets with scan; programmable remote con-trol, Amp; FR 10-70,000 Hz ±3 dB; S/N 85 dB line. FM: 50-dB quieting sens 17.2 dBf stereo; cap ratio 1.5 dB.

RZ-790 50-W/ch Receiver

2 channels. 50 W x 2 rms into 8 ohms from 20-20,000 Hz with 0.5% THD. 4 audio and 1 video inputs: tape-monitor loop; 4 speaker terminals S-band graphic EQ; loudness; auto tuning; 8
AM/16 FM presets with scan; remote control.
Amp: S/N 73 dB phono, 95 dB line. FM: 50-dB quieting sens 40 dBf stereo. 17 x 4½ x 11% in: 15 lb...

SHERWOOD

RV-6030R 275-W A/V Receiver 5 channels, Dolby Pro Logic. 75 W x 3 (front, center) + 25 x 2 (rear) with 0.5% THD or 105 x 2 with 0.05% THD, Front-panel A/V input; 5 audio and 4 video inputs; pre-out/main-in loops for front channels; line-level center- and rearchannel outputs; video-monitor output; headphone jack. Features Analog Devices processor. Adjustable digital delay: Dolby Time Link digital delay; test-tone generator; 30 AM/FM presets with scan; center- and rear-channel level controls; rear input-balance control; bass and treble controls; fluorescent display; Digi-Link III sys-

tem-control compatibility: remote control ...\$475 RV-5030R 215-W A/V Receiver 4 channels, Dolby Pro Logic. 65 W x 3 (front center) + 20 x 1 (rear) with 0.5% THD or 85 x 2 with 0.05% THD, Front-panel A/V input: 5 audio and 3 video inputs; video-monitor output. Test-tone generator, 30 AM/FM presets with scan; rear- and center-channel level controls; rear input-balance control; timer; Digi-Link III sys tem-control compatibility: remote control\$370

SONY STR-D2090 285-W A/V Receiver

4 channels, digital Dolby Pro Logic, 75 W x 3 (front, center) + 60 x 1 (rear) or 120 x 2, 5 audio and 3 video inputs including 1 front-panel A/V. Hall, acoustic, opera, church, stadium, live, jazz, dance, and theater sound fields; live and thester enhanced Dolby Pro Logic modes: 10 user sound-field presets; adjustable digital delay (10-30 ms); auto input balance; test-tone generator; auto and direct tuning; 30 AM/FM presets; sleep timer; icon-based on-screen dis-.\$1,000

STR-D911 235-W A/V Receiver 4 channels, Dolby Pro Logic. 70 W x 3 (front.

center) + 25 x 1 (rear) or 100 x 2. 8 inputs including 2 video and 1 front-panel A/V. Features discrete output devices. Hall, live, dance, theater, acoustic, and simulated sound fields; live and theater enhanced Dolby Pro Logic modes: adjustable digital delay (10-30 ms); auto input balance; test-tone generator; switchable 4/8ohm impedance; direct station access; 30 AM/FM presets; bass and treble controls; A/V remote control, 17 x 5% x 13% in...

STR-D915 325-W A/V Receiver 4 channels, Dolby Pro Logic, DSP. 100 W x 3

(front, center) + 25 x 1 (rear). 10 inputs; 3 A/V inputs including one on front panel. Features switchable 4/8-ohm impedance; DSP for early reflection time and effects level. Dolby Pro Log ic enhancement modes. 17 x 51/4 x 121/4 in...\$450 STR-D715 265-W A/V Receiver

4 channels, Dolby Pro Logic. 80 W x 3 (front center) + 25 x 1 (rear) or 100 x 2 (front) + 25 x 1 (rear), 9 inputs, Theater and live Dolby Pro Logic enhancement modes; hall, live, dance, theater, acoustic, and simulated surround modes; electronic bass and treble controls. 17 x

STR-D615 170-W A/V Receiver 4 channels, Dolby Pro Logic. 50 W x 3 (front,

center) + 20 x 1 (rear) or 80 x 2 (front) + 20 x 1 (rear). Hall/simulated surround; variable time delay (10-30 ms). 17 x 4½ x 10½ in....... \$350

STR-D515 160-W A/V Receiver 4 channels, Dolby Pro Logic, 60 W x 2 (front) + 20 x 2 (center, rear). 6 inputs. Features dynamic bass feedback. Hall surround mode; audio muting. 17 x 43/4 x 101/2 in.

STR-D315 100-W/ch Receiver 2 channels, 100 W x 2, 6 inputs. Tape monitor; loudness: remote control .

STR-G1ES 280-W A/V Receiver 5 channels, digital Dolby Pro Logic, DSP. 80 W rms x 3 (front, center) + 20 W rms x 2 (rear). Pre-out/main-in loops for all channels; S-video input and output; phono input; subwoofer output. Features active 12-dB/oct subwoofer filter. Hall, acoustic, opera, church, stadium, live, iazz, dance, and theater DSP sound fields; 10 user sound-field presets; adjustable effect-level, room-size, wall-type, seat-position, and reverb DSP parameters; variable time delay (10-30 ms); auto input balance; digital parametric EQ for front channels; center and rear level con trols: 30 AM/FM presets: sleep timer: iconbased on-screen displays; fluorescent display; touch-screen remote control. Amp: FR 10-20,000 ±1 dB line; S/N 105 dB line. FM: 50-dB quieting sens 18.3 dBf mono, 38.3 dBf stereo; cap ratio 1.2 dB; S/N 74 dB stereo. 17 x 51/4 x 151/4 in; 32 lb \$1.700

STR-GX909ES 280-W A/V Receiver

4 channels, digital Dolby Pro Logic, DSP, 80 W x 3 (front, center) + 40 x 1 (rear) with 0.04% THD. 8 inputs; phono input; subwoofer output; pre-out/main-in loops for each channel, Hall, acoustic, opera, church, stadium, live, jazz, dance, and theater sound fields; adjustable effect-level, room-size, wall-type, seat-position. and reverb-time sound-field parameters; 10 user sound-field presets; digital parametric EQ; variable digital delay (10-30 ms); center- and rearchannel level controls; 30 AM/FM presets; icon-based on-screen displays; fluorescent dis play; programmable remote control. Amp: FR 10-20,000 Hz +0, -1 dB line; S/N 105 dB line FM: cap ratio 1.2 dB. 17 x 5\% x 15\% in..\$1,050 STR-GX808ES. As above, 70 W x 3 + 40 x 1 Without on-screen displays ...

TEAC

AG-V3020 262-W A/V Receiver 5 channels, Dolby Pro Logic. 100 W x 2 (front) with 0.07% THD + 28 W x 1 (center) + 17 W x 2 (rear). 4 audio inputs including phono; 3 A/V inputs. Theater, stadium, and Dolby 3 Stereo surround modes; adjustable digital delay; center- and rear-channel level controls; 30 AM/FM presets; mute switch; sleep timer; motor-driven volume control; remote control, FM; cap ratio 1.5 dB; S/N 70 dB stereo. 171/2 x 61/4 x 151/4 in; 29 lb

AG-V1020 100-W/ch Receiver

2 channels. 100 W x 2 rms. 2 video inputs in-cluding front-panel A/V; 1 A/V output; headphone jack. Matrix surround; video capability; 30 AM/FM presets with scan; auto tuning; loudness switch; mute button; direct station acess: fluorescent display; remote control. Amp; S/N: 94 dB line. FM: AM rej 60 dB; cap ratio 1.5 dB; S/N 75 dB mono, 70 dB stereo; THD (1,000 Hz) 0.2% mono, 0.4% stereo. 171/x x 51/4 x 131/4 in; 23 lb ...



TECHNICS SA-GX650 345-W A/V Receiver

4 channels, Dolby Pro Logic, 100 W x 3 (front, center) + 45 W x 1 (rear) or 125 W x 2. 2 video inputs; 4 audio inputs; subwoofer output. Features Class A amplifier circuit; fan cooling. Adjustable digital delay (15-30 ms); wide and phantom center-channel modes; Dolby 3 Stereo mode; rear- and center-channel level controls; 30 AM/FM presets; direct station access; alphanumeric display; programmable A/V remote control. Amp: FR 7-70,000 Hz ±3 dB; S/N 75 dB. FM: 50-dB quieting sens 18.3 dBf mono, 38.3 dBf stereo; alt-ch sel 65 dB, 17 x 61/2 x 13% in: 24 lb.

SA-GX550 255-W A/V Receiver

4 channels, Dolby Pro Logic. 75 W x 3 (front. center) + 30 W x 1 (rear) or 110 W x 2, 2 video inputs: 4 audio inputs. Features Class A amplifier circuit; fan cooling. Adjustable digital delay modes; Dolby 3 Stereo mode; rear- and centerchannel level controls; 30 AM/FM presets; direct station access; loudness switch; alphanumeric display; programmable A/V remote con-trol. Amp: FR 7-70,000 Hz ±3 dB; S/N 75 dB. FM: 50-dB quieting sens 18.3 dBf mono, 38.3 dBf stereo; alt-ch sel 65 dB. 17 x 6½ x 13% in;

SA-GX350 170-W A/V Receiver

4 channels, Dolby Pro Logic. 50 W x 3 (front, center) + 20 W x 1 (rear) or 100 W x 2. 2 video inputs: 4 audio inputs. Features Class A amp circuit. Dolby 3 Stereo mode; wide and phantom center-channel modes; rear- and centerchannel level controls; alphanumeric display; A/V remote control. Amp: FR 7-70,000 Hz ±3 dB; S/N 75 dB. FM: 50-dB quieting sens 18.3 dBf mono, 38.3 dBf stereo; alt-ch sel 65 dB, 17 x 5% x 13% in: 19 lb...

VECTOR RESEARCH VRX-5200R 50-W/ch Receiver

2 channels, 50 W x 2. Pre-out/main-in loop video-monitor output; signal-processor loop; 2 AC outlets. Features discrete output transistors. Matrix surround; 20 AM/FM presets; scan tuning; separate FM mute and mono switches. FM: 50-dB quieting sens 15.6 dBf mono, 37.6 dBf stereo; cap ratio 1.3 dB; alt-ch sel 60 dB; THD 0.07%. 17 x 41/2 x 131/2 in; 17 lb. \$370 VRX-3600R 40-W/ch Receiver

2 channels, 40 W x 2 into 8 ohms, Preout/main-in loops; video-monitor output; signal-processing loop; 2 AC outlets. Matrix surround; 20 AM/FM presets; auto scan; separate FM mute and mono switches. FM: 50-dB quieting sens 15.6 dBf mono, 37.6 dBf stereo; alt-ch sel 58 dB; THD 0.08% .

VAMAHA

RX-V1070 390-W A/V Receiver channels, digital Dolby Pro Logic, DSP, 110 W x 3 (front, center) + 30 W x 2 (rear). 4 audio and 4 A/V inputs: line-level outputs for each channel; 2 center-channel speaker outputs; subwoofer output with low-pass filter; 3 S-video innuts and 3 S-video outputs including 2 VCR loops and monitor output; headphone jack. Auto input balance for Dolby Pro Logic; 35-mm-theater, 70-mm-theater, and TV-theater cinema DSP modes; rock-concert, jazz-club, church, and concert-hall sound fields: wide and phantom center-channel modes; 40 AM/FM presets; onscreen displays including level meters; programnable remote control. 41 lb... .\$1,349 RX-V870, As above, 3 A/V inputs, 80 W x 3 (front, center) + 25 W x 2 (rear). 33 lb.......\$949

RX-V670 260-W A/V Receiver

5 channels, Dolby Pro Logic, DSP. 70 W x 3 (front, center) + 25 W x 2 (rear), 4 audio and 3 A/V inputs; pre-out/main-in loops; line-level rear outputs; headphone jack. 35-mm-theater cinema DSP mode; rock-concert, concert-hall mono-movie, concert-video DSP modes; wide and phantom center-channel modes: auto input balance; test-tone generator; 40 AM/FM presets; programmable remote control ... \$740 RX-470. As above with 50 W x 3 + 15 W x 2, 2 A/V inputs; no line outputs; nonprogrammable

RX-770 85-W/ch Receiver

2 channels, 85 W x 2 into 8 ohms or 220 W x 2 into 2 ohms. 4 audio and 2 video inputs; 3-way binding posts; pre-out/main-in loops; infrared input and output ports. Features motor-driven input selector and volume control; source-direct mode, 40 AM/FM presets; variable loudness control; sleep timer; tone and balance controls; record-out selector; A/B speaker switching; sig nal-strength meter; remote control. 22 lb\$549

RX-V480 225-W A/V Receiver

5 channels, digital Dolby Pro Logic, DSP. 65 W x 3 rms (front, center) + 15 W x 2 (rear), all rms into 8 ohms, 4 audio and 2 video inputs, Features DSP-enhanced 35-mm Dolby Pro Logic mode: concert-video, mono-movie, rock-concert, and concert-hall DSP modes; digital Dolby test-tone generators; digital delay; wide and phantom center-channel modes; center and rear level controls; auto FM station memory; 40 AM/FM presets; auto/manual mono/stereo tuning switch: VCR/tape-monitor controls: fluorescent display; remote control. 171/s x 5 x 111/4 in; 17 lb

RX-485 65-W/ch Receiver

2 channels, 65 W x 2 rms, 6 inputs including 2 tape monitors and phono. Features pure-direct switch; motor-driven 5-gang volume control. FM auto station memory; 40 AM/FM presets; auto/manual mono/ stereo switch; continuously variable loudness control; bass, treble, and balance controls: fluorescent display: remote control. S/N 82 dB phono, 105 dB line. 171/2 x 5 x 111/4 in; 16 lb

POWER AMPLIFIERS

ACOUSTIC RESEARCH Limited Model 200 200-W/ch Amplifier

2 channels, 200 W x 2 rms into 8 ohms with 0.2% THD, Switchable Class A/B design. Bridged-mono, balanced, and unbalanced outputs. Normal and parallel stereo switches. S/N 115 dB; slew rate 30 V/µs; damping factor 80. 19 x 71/4 x 201/4 in; 50 lb

ACURUS

x 2 into 4 ohms

800

Model 200X3 600-W Amplifier 3 channels. 200 W x 3. Features discrete circuitlow-impedance drive capability......\$1,295 Model 100X3, As above, 100 W x 3

A250 250-W/ch Amplifier 2 channels, 250 W x 2 into 8 ohms or 350 x 2 into 4 ohms. Features Class A circuitry; bipolartransistor output stage.... A150. As above, 150 W x 2 into 8 ohms or 250

ADCOM GFA-5800 250-W/ch Amplifier

channels. 250 W x 2. Features 32 discrete MOSFET output devices; thermally controlled forced-air cooling ...

GFA-555II 200-W/ch Amplifier 2 channels. 200 W x 2 into 8 ohms or 350 x 2 into 4 ohms. Features 1-ohm stability; low-negative-feedback design; constant damping factor. FR 20-20,000 Hz; THD 0.04%; damping factor

GFA-545II 100-W/ch Amplifier 2 channels. 100 W x 2 into 8 ohms or 150 x 2 into 4 ohms. Features 1-ohm stability; low-neg-

ative-feedback design; constant damping facto THD 0.04%. 17 x 51/2 x 121/2 in; 25 lb\$550 GFA-535II 60-W/ch Amplifier

2 channels, 60 W x 2 into 8 ohms or 100 x 2 into 4 ohms. Features 1-ohm stability: low-negative-feedback design; constant damping factor, direct-coupled design; separate power transformers for each channel. 2 sets of speaker outputs. THD 0.04%. 17 x 31/4 x 121/2 in\$350

A/D/S/ PH6 750-W Amplifier

6, 5, 4, or 3 channels. Designed for multiroom and home theater systems. 125 W/ch into 4 ohms from 20-20,000 Hz with 0.02% THD. Features 1-ohm stability; short-circuit protection with fault indicators for each channel; variable-speed fan cooling. Remote, manual, or sig-nal-sensing power turn-on. S/N 90 dB at 1 W. 17½ x 5½ x 15½ in...

AMC Model 2445 180-W Amplifier

4 channels, 45 W x 4, or 45 x 2 + 90 x 1, or 90 x 2 into 8 ohms. FR 20-20,000 Hz ±0.2 dB: THD 0.04%; S/N 100 dBA at 1 W; damping factor 100...

ARAGON Model 4004 MkII 200-W/ch Amplifier

2 channels. 200 W x 2 into 8 ohms, 400 x 2 into

4 ohms, or 700 x 2 into 2 ohms. Features dualmono design; 2 power supplies; 2 toroidal transformers; quad-array transistor; Monster Cable output wiring, Gold-plated connectors, S/N 120 dB; damping factor 200, 19 x 6½ x 14 in: 65 lb \$1.850 Model 2004. As above, 100 W x 2 into 8 ohms, 200 x 2 into 4 ohms, or 350 x 2 into 2 ohms. 44

ARCAM

D120.2 100-W/ch Amplifier 2 channels. 100 W x 2 into 8 ohms or 150 x 2 into 4 ohms. Features dual-mono configuration; separate power supplies and toroidal transformers. 21 lb

AUDIO BY VAN ALSTINE FET-Valve 500hc 250-W/ch Tube Amplifier 2

2 channels, 250 W x 2 into 8 ohms, Feature hybrid vacuum tube and Class A MOSFET trans-imp circuitry. THD 0.01%. 17 x 7 x 13 in; 38 III

Omega II 440 220-W/ch Amplifier

2 channels. 220 W x 2 into 8 ohms. Features ac-tive feedback design. THD 0.005%; slew rate 150 V/us. 17 x 7 x 13 in: 38 lb... .\$1.195 Omega II 200. As above, 90 W x 2 into 8



AUDIO DESIGN MPA-500 2,000-W Amplifier

5 channels. Designed for home theater systems. 400 W x 5. THX certification; separate power supply. Each chassis 51/4 x 19 x 161/2 in ...\$6,195

BPA-500 500-W Mono Amplifier I channel. Designed for subwoofers, 500 W x 1. THX certification. 51/4 x 19 x 161/2 in......\$2,095

MPA-6 700-W Amplifier

6 channels. Designed for home theater systems. 90 W x 5 + 250 x 1 (subwoofer). Features variable 20-200 Hz subwoofer crossover. Subwoofer output with level control; 5-way binding posts. Variable input sens and LED power indi cators. 51/4 x 19 x 161/2 in; 32 lb... ...\$1.680

MPA-5 575-W Amplifier 5 channels. Designed for home-theater applica-tions. 115 W x 5. 5-way binding posts. Variable input sens and LED power indicator for each channel. 51/4 x 19 x 161/2 in; 32 lb......

AUDIO INNOVATIONS Series 800 MkIII 25-W/ch Tube Amplifier 2 channels, 25 W x 2 into 8 ohms, Class A design with 4 EL34 output tubes; Ultralinear

push-pull configuration, 42 lb... ...\$1,600/pr AUDIO RESEARCH

D400 200-W/ch Amplif 2 channels, 200 W x 2 into 8 ohms from 4100.000 Hz. Features Class AB circuitry; dualmono design; 40 multiple-emitter transistors in direct-coupled output stage; two separate trans-formers, XLR connectors; RCA inputs; brass outputs. Slew rate 50 V/µs. 19 x 9 x 17¾ in; 73

D300 160-W/ch Amplifier

2 channels, 160 W x 2 into 8 ohms or 300 W x 1 into 4 ohms. Features solid-state topology; regulated power supply. Unbalanced RCA and balanced XLR inputs. Slew rate 50 V/µs. 19 x 7 x 21/4 in; 48 lb..... \$3,995 D200, As above, 110 W x 2 into 8 ohms or 200 x 1 into 4 ohms. 19 x 51/4 x 111/4 in; 33 lb\$2,495

AUDIOSOURCE

Amp One 80-W/ch Amplifier 2 channels. 80 W x 2 cont avg into 8 ohms. Features MOSFET circuitry; toroidal power transformer; soft-clipping circuitry. Dual analog power-output meters; L/R output-level controls. FR 20-20,000 Hz; THD 0.04%

AUDIRE Tenendo 200-W/ch Amplifier

2 channels, 200 W x 2 into 8 ohms, Features dual-mono design; Class AB design; modular construction. Balanced inputs. Combination circuit-breaker/power-switch for each channel. FR 2-100,000 Hz -1 dB; slew rate 50 V/µs; damp-ing factor 700, 19 x 7 x 10 in; 50 lb.......\$1,980

Forté 125-W/ch Amplifier 2 channels. 125 W x 2 into 8 ohms from 20-20,000 Hz with 0.05% THD. Features dualmono design; bipolar transistors. Balanced inputs. Slew rate 50 V/µs; damping factor 350 at 1,000 Hz. 19 x 51/4 x 10 in; 41 lb..........\$1,250 MOSFET version of above . \$1.350

Crescendo 75-W/ch Amplifier 2 channels. 75 W x 2 into 8 ohms from 20-20,000 Hz with 0.05% THD. Features bipolar transistors. Balanced inputs, Slew rate 45 V/us: damping factor 300. 19 x 51/4 x 9 in; 22 lb...\$700 MOSFET version of above ... \$760

BAK COMPONENTS AV-6000 630-W Amplifier

6 channels. Designed for home theater or multiroom systems, 105 W x 6, Gold-plated connectors. Level controls. FR 5-45,000 Hz ±3 dB; THD 0.09% at 1,000 Hz; S/N 90 dB; slew rate 20 V/µs; dynamic headroom 0.9 dB. 17 x 6 x 17¾ in; 40 lb\$1,298

EX4420 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms or 400 x 2

into 4 ohms. Dual-mono design; DC-coupled circuitry. Balanced inputs; gold-plated connectors. FR 1-45,000 Hz; THD 0.09% at 1,000 Hz; S/N 95 dB; slew rate 14 V/µs; dynamic headroom 1.2 dB. 17 x 51/4 x 17 in; 40 lb.

AV-654 360-W Amplifier 6 channels. 60 W x 6. Designed for home-theater or multiroom systems. Gold-plated connectors. Level controls. FR 5-45,000 Hz ±3 dB: S/N 94 dB; dynamic headroom 0.9 dB. 17 x 51/4

x 17 in: 27 lb ST-1400 105-W/ch Amplifier 2 channels, 105 W x 2 into 8 ohms or 150 x 2

into 4 ohms. Features Class A design up to MOSFET output stage. Balanced inputs. FR 545,000 Hz; THD 0.09%; S/N 95 dB; slew rate ST-140, Mono version of above, 150 W into 8 ohms...

REDINI

BA-903 250-W/ch Amplifier 2 channels, 250 W x 2 cont avg into 8 ohms or 500 x 1 cont avg into 4 ohms. Features solidstate technology. FR 20-20,000 Hz; THD 0.1% into 8 ohms; S/N 105 dB; slew rate 55 V/µs; damping factor 500; dynamic headroom 3 dB. 19 x 71/2 x 18% in: 66 lb... BA-901. As above, 120 W x 2 cont avg into 8 ohms or 240 x 1 cont avg into 4 ohms, 19 x 51/4

x 141/2 in; 33 lb RERNING

EA-2101 100-W/ch Tube Amplifier channels, 100 W x 2 cont ave into 8 ohms. Features triode vacuum tubes; regulated power supply; voltage protection; 4 output-transistor windings per channel. FR 10-60,000 Hz ±1.5 dB; THD 0.2%; S/N 100 dB. 19 x 5¼ x 19 in;

...\$1.750

\$4,290

\$1.849



BGW Performance Series 2

BGW SYSTEMS SPA-3 750-W Amplifier

3 channels, 250 W x 3 into 8 ohms or 300 x 3 into 4 ohms. Features digital attenuators; 24dB/octave crossovers: adjustable high-pass filter; magnetic circuit breaker. Parametric EQ; 2 adjustable delays. S/N 100 dB. 19 x 51/4 x 131/6 in: 48 lb \$2,599

Model 750G-96 300-W/ch Amplifier 2 channels, 300 W x 2 into 8 ohms, 450 x 2 into 4 ohms, or 900 x 1 into 8 ohms. Features speaker protection; defeatable cooling fan. Trans-

instead of transformer isolated ..

former-isolated inputs; XLR and phone-jack inputs; 5-way binding posts. LED display and status indicators; switchable subsonic filter. 19 x 7 \$1 040 v 13 in: 61 lb Model 750G. As above, inputs active balanced

Model 350A-06 Series 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms, 325 x 2 into 4 ohms, or 600 x 1 into 8 ohms. Features discrete circuitry; low-feedback design; DC speaker protection; magnetic circuit breaker. T former-isolated inputs: XLR and phone-iack inputs; 5-way binding posts. LED display and status indicators; modulation and clip indicators; switchable subsonic filter. FR 20-20,000 Hz ±0.2 dB; slew rate 20 V/µs; damping factor 400. Gold and black finish, 19 x 51/4 x 107/4 in; 34 .\$1,449

Model 350A. As above, inputs active balanced instead of transformer isolated \$1 340 Model 350-06, As Model 350A-06, without LED display or status indicators . \$1.299 Model 350, As Model 350-06, inputs active balanced instead of transformer isolated .. \$1,199 Performance Series 2 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms, 300 x 2 into 4 ohms, or 600 x 1 into 8 ohms. Features

forced-air cooling; steel chassis. Active balanced inputs: balanced XLR and phone-iack inputs; 5-way binding posts. LED clipping indicators; gain controls, FR 8-175,000 Hz ±0.3 dB; THD 0.1% into 8 ohms. 19 x 31/2 x 131/2 in: Performance Series L. As above, 100 W x 2 into 8 ohms, 150 x 2 into 4 ohms, or 300 x 1

\$799

into 8 ohms, 32 lb., Model 6500T 100-W/ch Amplifier

2 channels, 100 W x 2 into 8 ohms, 150 x 2 into 4 ohms, or 250 x 1 into 8 ohms. Features speaker protection. Barrier-strip inputs/outputs: phone-jack input. Gain controls: bridging switch. FR 3-100,000 ±0.3 dB; damping factor 200, 19 x 3½ x 13 in; 30 lb \$500 OPT-15. 2-way 18-dB/oct crossover card for \$00

BIC AMERICA

Venturi SW100 100-W Mono Amplifier I channel. 100 W x 1. Features high-pass filter: active crossover at 85 Hz. Speaker- and lin level inputs and outputs. Black .

BOULDER The following feature a 5-vr warranty.

Boulder 500 150-W/ch Amplifier 2 channels. 150 W x 2 into 8 ohms, 250 x 2 into 4 ohms, or 500 x 1 into 8 ohms. Features 2stage design; toroidal power transformer; shielded power cord; short-circuit, DC-offset,

and thermal protections; 110/220-V AC operation. LED indicators; output-level controls. THD 0.005%; slew rate 35 V/µs stereo, 70 V/µs mono, 17 x 51/4 x 151/2 in..... \$5.500 Boulder 500AE. As above, with balanced inputs. Without LED's or level controls\$4,350

Boulder 102AE 100-W/ch Amplifier 2 channels. 100 W x 2 into 8 ohms. Features two-stage design; discrete circuitry; toroidal power transformer. Gold-plated connectors. Voltage and current clipping indicators. THD

BRYSTON The following feature a 20-yr parts-and-labor warranty. Models 4B NRB and 3B NRB are

available in THY versions Model 4B NRB 250-W/ch Amplifier 2 channels, 250 W x 2 into 8 ohms from 20-

20,000 Hz with 0.01% THD. Features dual power supplies with multiple filter capacitors; 2,496-square-in heat sink; soft-start circuitry: input buffer. Gold-plated connectors; balanced XLR and unbalanced RCA inputs. LED indicators: mono/stereo switch. Slew rate 60 V/us: damping factor 500 at 20 Hz into 8 ohms. 19 x

Model 3B NRB 100-W/ch Amplifier 2 channels, 100 W x 2 into 8 ohms from 20-20,000 Hz with 0.01% THD. Features dual power supplies; quad-complementary output section; 1,248-square-in heat sink. Gold-plated RCA and XLR inputs. Mono/stereo switch; LED indicators. Slew rate 60 V/us; damping factor 500 at 20 Hz into 8 ohms, 19 x 51/4 x 9 in 28 lb ..\$1,395

51/4 x 151/2 in; 42 lb.

Model 2B-LP 50-W/ch Amplifier

2 channels, 50 W x 2 into 8 ohms from 20-20,000 Hz with 0.01% THD. Features dual power supplies; 615-square-in heat sink; 1% metal-film resistors; polystyrene capacitors; dis-crete circuitry. Gold-plated 5-way binding posts and RCA connectors. Mono/stereo switch, Slew

CAMBRIDGE AUDIO A100 110-W/ch Amplifier

2 channels, 110 W x 2 into 8 ohms, Features dual-mono design; two toroidal transformers coupled with four reservoir capacitors; highpass filter input. Gold-plated inputs; 5-way binding posts. FR 3-82,000 Hz ±3 dB; THD 0.01% at 50% rated power; S/N 100 dBA. 17 x 31/4 x 121/2 in; 22 lb. \$700 A70, As above, 60 W x 2, 14 lb.

CARVER

TFM-75 750-W/ch Amplifier 2 channels. 750 W x 2 into 8 ohms or 1,000 x 2 into 4 ohms from 20-20,000 Hz with 0.1% THD. Features dual-mono solid-state design with 2 separate AC power cords; regulated power supply for each channel; amp and speaker overload protection; fan cooling. Power me-

ter, clipping indicator, variable L/R input-sens control, and power switch for each channel. S/N 100 dBA. 19 x 51/4 x 13 in; 48 lb..... \$2,700 TFM-55 380-W/ch Amplifier

2 channels. 380 W x 2 into 8 ohms or 600 x 2 into 4 ohms from 20-20,000 Hz with 0.5% THD. Features solid-state design with transfer function modified for vacuum-tube sound characteristics; regulated power supply; amplifier and speaker overload protections. Two analog power meters with switchable range; variable

L/R input-sens controls. S/N 101 dBA. 19 x 41/2 x 14 in. TFM-35x 250-W/ch Amplifier 2 channels, 250 W x 2 into 8 ohms from 20-20,000 Hz with 0.5% THD. Features THX cer-

\$1.095

\$7,500

tification; solid-state design; amplifier and speaker protections. Dual analog power me with switchable range. 19 x 41/2 x 141/2 in ...\$750

AV-634 240-W Amplifier 4 channels. 60 W x 4 into 8 ohms, 60 x 2 + 150 x 1 into 8 ohms, or 100 x 4 into 4 ohms from 20-20,000 Hz with 0.15% THD. Designed for multiroom, home theater, or subwoofer/satellite systems. Features 18-dB/oct active crossover at 80, 100, or 150 Hz; input-sens controls for all channels, 19 x 31/4 x 111/4 in ...

TFM-6cb 65-W/cb Amplifier 2 channels, 65 W x 2 into 8 ohms or 100 x 2 into 4 ohms from 20-20,000 Hz with 0.1% THD. Daisychain capability; L/R input-sens controls; A/B speaker switching; power/peak LED indica-tors, S/N 110 dBA, 19 x 1½ x 13 in S320

CELLO Duet 350-W/ch Amplifier 2 channels. 350 W x 2 cont avg into 8 ohm

23¼ x 12 x 17¼ in; 95 lb.. Encore 50-W Mono Amplifier I channel, 50 W. Dual-choke power supply; nickel-plated copper heat sinks... \$6,000/ne 2-channel version of above \$6,000 Bridging kit for above .

CLASSÉ AUDIO

The following are available in satin black or soft shadow silver.

Classé Twenty-Five 250-W/ch Amplifier 2 channels. 250 W x 2 or 1,000 x 1 into 8 ohms.

Features polystyrene and polypropylene capacitors; toroidal transformer. Balanced and unbal-anced inputs. FR 20-20,000 Hz ±1 dB: THD 0.1%; S/N 100 dB. 19 x 20% x 8 in\$3,995 Classé Fifteen. As above, 175 W x 2 or 700 x 1 into 8 ohms, 19 x 171/4 x 71/4 in\$2,995 Classé Ten. As above, 125 W x 2 or 400 x 1 into 8 ohms. 19 x 16 x 6½ in....\$1,995 Classé Seventy. As above, 75 W x 2 into 8 ohms or 150 x 2 into 4 ohms. 19 x 11¼ x 4½ \$1 105

CODA

Coda Amplifier 10 100-W/ch Amplifier 2 channels, 100 W x 2 into 8 ohms, Features no

overall feedback; DC-coupled design; standby circuit: independent rectification and supply capacitors; double-sided gold-plated circuit boards; anodized chassis. Selectable balanced/ unbalanced inputs; FET input with bipolar current gain; FR 0-100,000 Hz ±3 dB; THD 0.1%: S/N 100 dB; slew rate 50 V/us, 19 x 31/2 x 121/2 in: 35 lb... \$2,350

CONRAD-JOHNSON Evolution 2000-A 200-W/ch Tube Amplifier 2 channels, 200 W x 2 into 8 ohms. Features hybrid tube/transistor design with tube driver stage; zero-feedback solid-state MOSFET out-\$5.795 put stage. 125 lb.

MF2300 250-W/ch Amplifier

2 channels, 250 W x 2 cont avg from 20-20,000 Hz with 1% THD. Features MOSFET low-feedback design; polystyrene and polypropylene capacitors. J-FET input stage. S/N 98 dB, 19 x 61/4 x 17 in: 80 lb... .\$2,795 MF2200. As above, 200 W x 2 into 8 ohms. 19 x 51/4 x 17 in: 69 lb\$1,995 MF2100. As MF2300, 100 W x 2. Bipolar output stage, 19 x 41/4 x 14 in; 40 lb... ...\$1,495

MV52 45-W/ch Amplifier

2 channels. 45 W x 2 cont avg into 8 ohms. Features polystyrene capacitors. LED bias indicators, S/N 94 dB, 19 x 9 x 201/2 in; 40 lb\$1,995



Conrad-Johnson Evolution 2000-A

COUNTERPOINT

SA-220 220-W/ch Tube Amplifier 2 channels. 220 W x 2 into 8 ohms or 700 x 1 into 8 ohms. Features hybrid design with tube input stage and MOSFET output stage; protec-tion circuitry outside signal path; 1,000-V transformer: copper-plated chassis: 1-ohm stability FR 1.2-200,000 Hz; THD 0.02%; S/N 84 dB 19 x 61/4 x 19 in; 69 lb \$2.995 SA-100 100-W/ch Tube Amplifier 2 channels, 100 W x 2 into 8 ohms, Featur

hybrid design with tube input stage and MOS-FET output stage; copper-plated chassis; 1,000-V transformer; 2-ohm stability. FR 5-100,000 Hz; THD 1.0%; S/N 92 dB; dynamic headroom 3 dB, 19 x 4½ x 12¾ in; 28 lb ... \$1.405

Solid-1 100-W/ch Amplifier 2 channels. 100 W x 2 into 8 ohms or 170 x 2 into 4 ohms. Features FET signal path; 2-ohm stability; bipolar technology. Dynamic head-room 3 dB. Black or silver finish. 3-yr warranty. 19 x 4½ x 10½ in; 18 lb...

CROWN INTERNATIONAL

Macro Reference 760-W/ch Amplifier 2 channels, 760 W x 2 into 8 ohms, 1,160 x 2 into 4 ohms, or 1,500 x 2 into 2 ohms. Features grounded bridge circuitry; output protection; regulated cooling system. Selectable-range output-level meter; bridged- and parallel-mono modes; distortion, protection, and signal-pres-ence indicators; level control. FR 20-20,000 Hz ±0.1 dB; S/N 115 dB; damping factor 20,000. 19 x 7 x 16 in: 57 lb..

DB SYSTEMS DB-6A 40-W/ch Amplifier

2 channels. 40 W x 2 cont avg into 8 ohms from 20-20,000 Hz with 0.003% THD. Features 1ohm stability; 12-dB/oct infrasonic filter. Clipping LEDs. FR 20-40,000 Hz +0, -1 dB; S/N 112 dB; slew rate 15 V/µs; damping factor 400 from 20-1,000 Hz. 16 x 4½ x 12½ in........\$795 DB-6A-M. As DB-6A, mono. 140 W x 1 cont avg with 0.008% THD. Slew rate 30 V/µs..\$795 onversion of DB-6A to DB-6A-M..... \$30 DB-6A-M(2), Pair of DB-6A-M... \$1,545

DENON

POA-5000 400-W Amplifier 6 5 4 or 3 channels, 100 W x 2 + 50 x 4, all into 8 ohms from 20-20,000 Hz. Designed for use with the AVP-5000 A/V preamplifier. Features optically coupled Class A circuitry; toroidal power transformer; separate power supply for each channel pair. Remote turn-on from Denon preamps, THD 0.02%; S/N 118 dBA.......\$1,500

POA-2800 200-W/ch Amplifier

2 channels, 200 W x 2 into 8 ohms from 20-20,000 Hz with 0.01% THD. Features ontically coupled Class A MOSFET circuitry; dual power supplies with toroidal transformers. Remote turn-on from Denon preamps; A/B speaker switching, S/N 123 dBA...

POA-800 50-W/ch Amplifier 2 channels, 50 W x 2 or 120 x 1 into 8 ohms Features discrete circuitry. 3-way speaker outputs. Peak-level indicator; remote turn-on from Denon preamps. THD 0.05%

DYNACO

Stereo 400 Series II 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms, 300 x 2 into 4 ohms, or 600 x 1 into 8 ohms from 20-20,000 Hz with 0.05% THD. Features Class AB operation; 16 bipolar output transistors; toroidal transformer, Current selector, S/N 125 dB; damping factor 120. 17 x 31/2 x 121/4 in; 29 lb.......\$1,000

Stereo 200 100-W/ch Amplifier 2 channels. 100 W x 2 into 8 ohms, 150 x 2 into 4 ohms, or 300 x 1 into 8 ohms from 20-20,000 Hz with 0.05% THD. Features Class AB operation; 8 bipolar output transistors; toroidal transformer. S/N 125 dB; damping factor 120. 17 x 3 x 121/4 in; 22 lb

Stereo 100 50-W/ch Amplifier

2 channels. 50 W x 2 into 8 ohms or 75 x 2 into 4 ohms from 20-20,000 with 0.05% THD. Features Class AB operation; 4 bipolar output transistors. S/N 110 dB; damping factor 100\$425

FORTÉ F6 200-W/ch Amplifier

channels, 200 W x 2 into 8 ohms from 0-20,000 Hz with 0.1% THD. Features IGBT outnut transistors: FET/bipolar front end: Class A/AB gain stages; glass-epoxy circuit boards; toroidal power transformer. Gold-plated con-nectors. Slew rate 50 V/µs. 17 x 6½ x 9½ in; 33 lb... \$1,690 F5. As above, 100 W x 2 into 8 ohms from 0-20.000 Hz with 0.1% THD. High-bias Class A/AB output stage. 17 x 5 x 91/4 in; 26 lb ...\$990

FT-1 485-W Amplifier

5 channels, 125 W x 3 + 55 x 2, all into 8 ohms from 20-20,000 Hz with 0.15% THD. Features bipolar output transistors; FET input stage. FR 3-50,000 Hz ±1 dB \$1.590

FOSGATE AUDIONICS Model 4200 500-W Amplifier

4 channels. 125 W x 4 or 400 x 2 into 8 ohm 200 x 4 or 600 x 2 into 4 ohms. Features THX certification, FR 20-20,000 Hz ±1 dB \$1,899

Model 4125 280-W Amplifier 4 channels. 70 W x 4 or 200 x 2 into 8 ohms 110 x 4 or 270 x 2 into 4 ohms. Features THX certification, FR 20-20.000 Hz ±1 dB.....\$1.099

M-60 MkII 35-W Mono Amplifier I channel. 35 W into 8 ohms or 60 W into 4 ohms with 0.2% THD. Designed for center channel in home theater system. Features fully complementary discrete circuit design. Inputlevel control. FR 20-20,000 Hz ±1 dB. 81/2 x

2½ x 7½ in: 6 lb... GENESIS

Stealth B-200 Amplifier Features servo MOSFET outputs. Direct balanced and unbalanced inputs. Variable bias; remote control Black 175 lb \$7,000

HAFLER Transnova 9505S 250-W/ch Amplifier

2 channels, 250 W x 2 or 750 x 1 into 8 ohms or 375 x 2 into 4 ohms. XLR and RCA inputs Slew rate 150 V/µs; damping factor 1,000 at 1,000 Hz. Rack mountable; silver\$2,200 Transnova 9505, Above in black, Not rack mountable

Transnova 9300S 150-W/ch Amplifier 2 channels. 150 W x 2 or 450 x 1 into 8 ohm

or 225 x 2 into 4 ohms. Features Home THX certification; 12 MOSFET output devices; four 15,000-µF 75-V storage capacitors. THD 0.07%; S/N 100 dB; slew rate 150 V/µs; damping factor 800 at 1,000 Hz. Rack mountable; sil ver. 19 x 31/2 x 121/2 in; 36 lb..... \$1,350 Transnova 9300, Above in black, Not rack mountable. 17 x 3½ x 12½ in \$1.250 Model 9290 145-W/ch Amplifier

2 channels. 145 W x 2 or 420 x 1 into 8 ohms or 210 x 2 into 4 ohms. Features 12 MOSFET output devices: J-FET double-differential front end; double-sided glass circuit boards; twincore transformers. Level controls. THD 0.05%: S/N 100 dB; slew rate 50 V/ps; damping factor 300 at 1,000 Hz. 19 x 31/2 x 121/2 in; 35 lb .. \$800

Model 9130 65-W/ch Amplifier 2 channels, 65 W x 2 or 150 x 1 into 8 ohms, or

75 x 2 into 4 ohms. Self-limiting MOSFET out-put. Level controls, THD 0.008%; S/N 100 dB. 19 x 3½ x 9 in; 20 lb ...

HARMAN KARDON PA2400 170-W/ch Amplifier

2 channels, 170 W x 2 into 4 or 8 ohms, Features discrete circuitry from input to output; ry. Auto standby mode. FR 0.1-250,000 Hz; S/N 120 dB; slew rate 280 V/us; damping factor 120, 171/2 x 61/2 x 16 in;

PA2200 100-W/ch Amplifier

2 channels. 100 W x 2 into 4 or 8 ohms from 20-20,000 Hz with 0.3% THD. Features dis-20-20,000 Hz with 0.09% THD or 60 x 2 into 4 ohms with 0.3% THD...

HEYBROOK P-3 100-W/ch Amplifier

2 channels. 100 W x 2 cont avg into 8 ohms. Toroidal transformer; aluminum chassis, FR 20-20,000 Hz: THD 0.05%: S/N 60 dB.......S1.398

Power Tower 540-W Amplifier 4 channels, 200 W x 2 + 70 x 2 into 8 ohm

350 x 2 + 175 x 2 into 4 ohms, or 500 x 2 + 250 x 2 into 2 ohms. Features complementary allcascode Class AB design; polypropylene capacitors; thermal, DC/clip, and power-up/fail pro tections. Dual LED level meters. FR 0.6-75,000 Hz: THD 0.02%; S/N 102 dB; slew rate 100 \$3,300 V/us, 241/2 x 16 x 141/2 in: 70 lb Crossover. 4-way stereo active crossover for

KENWOOD

KM-X1 600-W A/V Amplifier 6 channels. 100 W x 6 (left, right, center, 2 sur-round, subwoofer) or 130 W x 3 (left, right,

subwoofer), both into 8 ohms with 0.03% THD. Features THX certification, Gold-plated connectors; terminals designed for heavy-gauge speaker cable. FR 10-100,000 Hz +0, -3 dB S/N 105 dB. 171/4 x 61/4 x 15 in; 44 lb\$899

KINERGETICS KBA-280 140-W/ch Amplifier

2 channels. 140 x 2 cont avg into 8 ohms. Features THX certification; dual-mono design; Class A operation; servo-controlled DC output; bipolar output transistors; 1-ohm stability. Rhodium input connectors; 5-way binding posts. 17 x 6 x 16½ in

KBA-550 550-W Amplifier 5 channels, 100 W x 4 + 150 x 1 into 8 ohm

Features pending THX certification; 1,400-W toroidal transformer, servo-controlled DC out-

put; independent power supplies. 17¼ x 6 x 16½ in... \$1,995



McIntosh MC-7106

MARK LEVINSON No. 23.5 200-W Mono Amplifier

I channel. 200 W x I into 8 ohms or 400 x I into 4 ohms. Features AC-power filtering with DC-offset corrector; power-surge limiter; two power supplies; toroidal transformers with independent secondary windings; clip-control circuitry; bipolar gain stages; active differential input circuit; Class AB output stage. THD 0.3%. 19 x 8½ x 18 in: 105 lb...

No. 27.5 100-W/ch Amplifier 2 channels. 100 W x 2 into 8 ohms, 200 x 2 into 4 ohms, or 350 x 2 into 2 ohms. Features dualmono design; raw AC current filtered by 2 separate circuits; power-surge limiter; separate power supplies: audio signals processed through 2 Class A voltage-gain stages and 3 current-gain stages; cascoded differential input stage; Class AB output stage. Balanced Camac or XLR input. 19 x 8% x 18 in; 85 lb......\$5,495 No. 29, As above, 50 W x 2 into 8 ohms, 100 x 2 into 4 ohms, or 175 x 2 into 2 ohms. 171/2 x 6% x 14% in: 60 lb...

LINN Klout 80-W/ch Amplifier

2 channels. 80 W x 2 into 8 ohms or 160 x 2 into 4 ohms. Features overcurrent and thermal protections \$3,695

LK100 50-W/ch Amplifier 2 channels, 50 W x 2 into 8 ohms. Features

overcurrent and thermal protections; internal heat sink. THD 0.5% ...

Powertek 50-W/ch Amplifier 2 channels, 50 W x 2 into 8 ohms, 171/4 x 31/4 x

MARANTZ MA-24 30-W Mono Amplifier

I channel. 30 W x 1 into 8 ohms from 20-20,000 Hz with 0,008% THD or 120 x 1 into 2 ohms. Features Class A amplification via differential-mode FETs; toroidal transformer mounted with resonance-reducing hand-tuned bolts; all-alloy case and chassis. FR 20-20,000 Hz ±0.2 dB; S/N 115 dB; damping factor 200 into 8 ohms at 1,000 Hz. Gold finish, 81/4 x 51/6 x

SM-80 120-W/ch Amplifier

141/s in; 22 lb ...

2 channels. 120 W x 2 into 8 ohms from 20-20,000 Hz with 0.02% THD, 175 x 2 into 4

\$1,500

ohms from 20-20,000 Hz with 0.04% THD, 350 x 1 rms into 8 ohms, or 800 x 1 into 2 ohms. Features THX certification: Class A input and driver stages; Class AB output stage. Peak indicators. S/N 121 dBA; slew rate 150 V/µs; damping factor 200 into 8 ohms. Gold finish with die-cast-alloy side panels. 17% x 6 x 14%

MA-500 125-W Mono Amplifier

I channel. 125 W x 1 rms into 8 ohms with 0.5% THD or 180 x 1 rms into 4 ohms with 0.9% THD, all from 20-20,000 Hz. Features THX certification: multiple-unit bridging capability. Gold-plated RCA input; 2 banana-plug outputs; RC-5 system remote-control interface. Remote turn-on/off with compatible equipment. S/N 116 dBA; damping factor 200 at 8 ohms. 3vr limited warranty, 31/4 x 51/4 x 171/4 in\$299

MCINTOSH MC-7300 300-W/ch Amplifier

2 channels. 300 W x 2 cont avg into 2, 4, or 8 ohms or 600 x I into 4, 8, or 16 ohms from 20-20,000 Hz with 0.005% THD. Features anticlipping circuitry. Balanced inputs. Power-on mute; power output meters. S/N 80 dBA; damping factor 40; dynamic headroom 1.9 dB. 161/4 x 5% x 15% in: 79 lb...

MC-7106 600-W Amplifier

6 channels. Designed for multiroom and home theater systems. 100 W x 6, 100 x 4 + 300 x 1, or 100 x 2 + 300 x 2 cont avg into 8 ohms from 20-20,000 Hz with 0.005% THD. Features THX certification; anti-clipping circuitry; overload, thermal, and DC output protections. LED power-level indicators for each channel. S/N 95 dBA; damping factor 200; dynamic headroom 1.7 dB, 171/2 x 71/4 x 171/2 in; 48 lb

MC-7150 150-W/ch Amplifier

2 channels, 150 W x 2 cont avg into 2, 4, or 8 ohms from 20-20 000 Hz with 0 005% THD Features anti-clipping circuitry; protection circuitry. Power-on mute; power-output meters. S/N 88 dBA; damping factor 40; dynamic head-room 1.8 dB, 16½ x 5½ x 15½ in: 58 lb. \$2,295

MC-7100 100-W/ch Amplifier

2 channels. 100 W x 2 cont avg into 8 ohms from 20-20,000 Hz with 0.005% THD. Features anti-clipping circuitry; DC and thermal output protections; toroidal power transformer. Power-on mute. S/N 95 dBA; damping factor 200; dy-namic headroom 1.7 dB. 17½ x 3½ x 14½ in;

MELOS Triode 200 ST Plus Gold

200-W/ch Tube Amplifier 2 channels, 200 W x 2 into 8 ohms with 0.2% THD. Features Class AB operation to 50 W. Balanced input. FR 20-30,000 Hz; dynamic headroom 3 dB, 82 lb..... Triode 200 ST Plus. As above, with Class AB operation to 25 W. No balanced inputs...\$2,995

SHA-1 3-W/ch Tube Headphone Amplifier

2 channels. Doubles as line-level preamp. 3 W x 2 into 8 ohms with 0.2% THD. Features vacuum tube/differential DC Class A headphoneamp design; zero feedback amplification; direct coupling: impedance-matched output-stage circuitry; toroidal transformer; regulated power supplies. 2 inputs and 1 line-level output; Tiffany connectors, 20 lb ...

MERIDIAN

Model 605 150-W Mono Amplifier

I channel, 150 W x 1 into 8 ohms, Class AB direct-coupled discrete design; MOSFET output devices; extruded aluminum case and heatsink. XLR and RCA inputs; gold-plated 5-way binding posts. FR 0.4-20,000 Hz +0, -0.5 dB; S/N -95.5 dB, 12½ x 4 x 12 in; 22 lb\$3,500/pr

Model 555 60-W/ch Amplifier 2 channels, 60 W x 2 into 8 ohms, Features

dual-mono design: twin-wound toroidal transformer; steel chassis; thermal and DC protection, Biwire outputs, 12% x 3½ x 12% in ... 5995

MOTIF

MS2001 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms, Features

MOSFET output stage; polystyrene capacitors FR 20-20,000 Hz ±0.1 dB; THD 1%; S/N 100 dB. 19 x 7 x 18½ in: 63 lb..... \$4,395 MS1001. As above, 100 W x 2

MTX SOUNDCRAFTSMEN

A400 205-W/ch Amplifier 2 channels. 205 W x 2 rms into 8 ohms or 300 x 2 rms into 4 ohms, each from 20-20,000 Hz with 0.05% THD; 600 W x 1 rms into 8 ohms. Features direct-coupled MOSFET outputs; no current limiting; variable fan cooling; thermal and overload protections. RCA inputs; 5-way binding posts. Clipping indicators. S/N 105 dB. 17 x 51/4 x 10% in . A200. As above, 125 W x 2 rms into 8 ohms or

190 x 2 rms into 4 ohms, each from 20-20,000 Hz with 0.05% THD; 380 W x 1 rms into 8 ohms. No phase-control regulation\$500 A100. As A200, 60 W x 2 rms into 8 ohms rms from 20-20,000 Hz with 0.05% THD\$400

MUSEATEX

The following feature floating-charge power supplies, MOSFET output, toroidal transformers, power-on muting, and a 5-yr warranty.

Melior AS-10 100-W/ch Amplifier

2 channels, 100 W x 2 into 8 ohms or 150 x 2 into 4 ohms. Features Class AB design; thermal overload, DC offset, and short-circuit protections; solid-state switching, 5-way binding posts. FR 1-100,000 Hz; slew rate 75 V/us; dami factor 100, 141/4 x 3 x 151/4 in: 26 lb...

Melior AM-15 150-W Mono Amplifier

I channel. 150 W x 1 cont avg into 8 ohms or 250 x 1 into 4 ohms. Features thermal overload. DC offset, and short-circuit protections; solidstate switching, 2 parallel inputs; 2 parallel outputs for biwiring; 5-way binding posts. FR 1-100,000 Hz; damping factor 100

NAD

Power Envelope circuitry refers to circuitry for extended headroom; Soft Clipping refers to circuitry to prevent speaker-damaging distortion.

Model 2700THX 150-W/ch Amplifier 2 channels. 150 W x 2 cont avg into 8 ohms

from 20-20,000 Hz with 0.03% THD or 400 x 1 into 4 or 8 ohms. Features THX certification: Power Envelope and Soft Clipping circuitries; infrasonic and ultrasonic filters. Impedance selector; overload indicators. S/N 100 dB; damping factor 120 at 50 Hz; dynamic headroom 4 dB. 171/4 x 5 x 151/4 in: 29 lb .. \$870 Model 906 180-W Amplifier

6 channels. Designed for multiroom and home theater systems. 30 W x 6 cont avg into 8 ohms from 20-20,000 Hz with 0.05% THD, 30 x 4 + 90 x 1, 30 x 2 + 90 x 2, or 90 x 3 into 8 ohms. Features Soft Clipping circuitry; 2-ohm drive capability. 3 buffered line-level outputs. S/N 85 dB; damping factor 100 at 50 Hz; dynamic headroom 2 dB, 161/2 x 41/4 x 141/2 in ...

Model 2400THX 100-W/ch Amplifier 2 channels. 100 W x 2 cont avg into 8 ohms from 20-20.000 Hz with 0.03% THD. Features THX certification; Power Envelope and Soft Clipping circuitries. Lab and normal inputs. A/B speaker switching; variable input sens, S/N 98 dB; damp ing factor 100 at 50 Hz; dynamic headroom 5

dB. 171/4 x 5 x 151/4 in; 22 lb., Model 2100X 60-W/ch Amplifier

2 channels, 60 W x 2 cont avg into 8 ohms from 20-20.000 Hz with 0.03% THD. Power Envelope and Soft Clipping circuitries. Lab and normal inputs. A/B speaker switching; variable input sens. S/N 100 dB; dynamic headroom 5.5 dB. 171/4 x 41/4 x 151/6 in; 21 lb...

NAIM

NAP 250 70-W/ch Amplifier 2 channels, 70 W x 2 cont into 8 ohms, Features toroidal transformer; 4 regulated power supplies; thermal protection. FR 3-40,000 Hz ±3

NAP 180 60-W/ch Amplifier 2 channels. 60 W x 2 cont into 8 ohms. Features 430-VA toroidal transformer; 4 smoothing capacitors, FR 5-40,000 Hz ±3 dB, 161/4 x 3 x

NAP 140 45-W/ch Amplifier 2 channels, 45 W x 2 cont into 8 ohms. Features dual power supply rectification; 2 smoothing capacitors for each channel; thermal protection. FR 5-40,000 Hz ±3 dB.

NAP 90/3 30-W/ch Amplifier 2 channels, 30 W x 2 cont into 8 ohms. Features toroidal transformer; protection circuitry. FR 5-40 000 Hz +3 dB 8 v 3 v 11% in

NAKAMICHI PA-7AII 225-W/ch Amplifier

2 channels. 225 W x 2 cont avg into 8 ohms with 0.05% THD. Features two internal am for high- and low-impedance sources; 700-W toroidal power transformer; electrolytic filters. FR 20-20,000 Hz +0, -0.2 dB; S/N 120 dB; damping factor 60; dynamic headroom 1,7 dB. 171/4 x 77/6 x 165/6 in; 63 lb.......\$2,500 PA-5AIL As above, 150 W x 2

NHT MA-1 80-W Mono Amplifier l channel, 80 W into 8 ohms from 20-20,000 Hz with 0.1% THD. Designed for subwoofers.

Features line/speaker-level L+R summing input circuit. Line- and speaker-level inputs; speakerlevel subwoofer and satellite outputs. Auto standby: level control. Slew rate 30 V/us; dvnamic headroom 2 dB ...

OCM TECHNOLOGY

Model 500 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms, 400 x 2 into 4 ohms, or 800 x 1 into 8 ohms. Features Class AB MOSFET output circuitry with tempe ture-independent biasing; shielded 1,500-kVA toroidal power transformer; electrolytic capaci tors. Gold-plated RCA inputs; balanced XLR input; 5-way binding posts. FR 0.2-100,000 Hz ±3 dB; THD 0.25%; slew rate 200 V/µs. Black anodized-aluminum faceplate. 5-yr parts-andlabor warranty, 19 x 51/4 x 17 in; 66 lb\$2,595 Model 200. As above, 100 W x 2 into 8 ohms, 200 x 2 into 4 ohms, or 400 x 1 into 8 ohms Features 1.000-kVA transformer \$1.695

ONKYO

Integra M-588F 200-W/ch Amplifier 2 channels, 200 W x 2 rms into 8 ohms or 750 x 2 max into 2 ohms. Features balanced dualmono design; discrete outputs; optical output isolation; overload protection. XLR and RCA inputs: 4 parallel banana-plug outputs, 2 optically isolated power meters with auto meter-range selection. THD 0.005%; S/N 120 dB; damping factor 180, 18 x 71/2 x 161/4 in: 66 lb...

Integra M-504 165-W/ch Amplifier 2 channels, 165 W x 2 rms into 8 ohms or 530 x

2 max into 2 ohms. Dual-mono design; discrete outputs; linear switching. 4-way speaker selector; peak power meters. THD 0.003%; S/N 120 dB; damping factor 140. 18% x 7% x 16% in; 50 lb... \$850



MTX Soundcraftsmen A200

M-501 150-W/ch Amplifier 2 channels, 150 W x 2 rms into 8 ohms, 210 x 2

max into 8 ohms, or 400 x 2 into 2 ohms. Outputs for 2 speaker pairs. Features protection cir-cuitry. THD 0.09%; S/N 100 dB; damping factor 60. 171/4 x 51/4 x 131/4 in; 23 lb ...

PARAMOUNT PICTURES CX-240 240-W Amplifier 6 channels, 40 W each. Designed for home the-

ater systems. Quasi-complimentary circuitry Black-anodized aluminum faceplate\$480 MC-200, As above, 40 W x 5 rms ... \$400

PARASOUND HCA-1206 720-W Amplifier

6, 5, or 4 channels. Designed for home theater or multiroom systems. 120 W x 6 into 8 ohms 180 x 6 into 4 ohms, 120 x 4 + 300 x 1 into 8 ohms, or 120 x 2 + 300 x 2 into 8 ohms, all rms from 20-20,000 Hz. Features THX certification: 2 bridgeable channel pairs; pure Class A com-plementary MOSFET drivers; bipolar output devices; JFET input stage; silver-cadmium relays for speaker protection: thermal and overcurrent protections. Gold-plated inputs and 5 way binding posts. FR 20-120,000 Hz +0, -3 dB: THD 0.07%: S/N 118 dBA: slew rate 130

V/µs; damping factor 900 at 20 Hz; dynamic

headroom 1.9 dB. 19 x 7 x 15 in; 71 lb....\$1.850



S275 COVER PRICE as little as \$1.05 a copy! Enter my subscription to STEREO REVIEW now! \Box 1 year (12 issues) for \$15.94—\$1.33 a copy! ☐ 2 years (24 issues) for \$27.94—\$1.16 a copy! \square 3 years (36 issues) for \$37.94—\$1.05 a copy! Name (please print full name) 4B3V Address City

State Zip CHECK ONE: Payment enclosed. Bill me.
Canadian orders add \$8 per year (incl. 7% GST) roteign orders add \$8 per year: payment in U.S. Indis must accompany order. Please allow 30 to 60

Would you like to receive special offers from qualified users of our mailing list? \square Yes \square No

days for delivery of first issue.



Haldlandhalalladdladdlaadladladlad

BUSINESS REPLY MAIL

RST CLASS MAIL PERMIT NO. 1257 BOULDER, CO

POSTAGE WILL BE PAID BY ADDRESSEE

Stereo Review

P.O. BOX 52033 BOULDER CO 80323-2033 NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES



HCA-1200II 205-W/ch Amplifier

2 channels, 205 W x 2 rms into 8 ohms, 315 x 2 into 4 ohms, or 630 x 1 rms into 8 ohms all from 20-20,000 Hz. Features THX certification: JFET inputs and predrivers; Class A comple-mentary MOSFET driver stages; bipolar output stages: silver-cadmium relays for speaker protection; thermal and overcurrent protections. FR 8-150,000 Hz +0, -3 dB; THD 0,06%; S/N 110 dBA; slew rate 130 V/µs; damping factor 600 at 20 Hz; dynamic headroom 2 dB, 19 x 51/2 x 13

HCA-800II 100-W/ch Amplifier

2 channels, 100 W x 2 into 8 ohms, 150 x 2 into 4 ohms, or 260 x 1 into 8 ohms. Features pure Class AB discrete output stage: Class A cascode input circuitry; bipolar output devices; relay speaker protection: 700-VA toroidal transformer. Headphone jack. FR 20-20,000 Hz ±0.5 dB; THD 0.05%; S/N 104 dBA; slew rate 60 V/us; damping factor 120 at 20 Hz; dynamic headroom 1.5 dB. 171/4 x 31/4 x 111/4 in; 18 lb \$455 HCA-500, As above, 50 W x 2 into 8 ohms or 75 x 2 into 4 ohms. THD 0.25%; S/N 100 dBA;

PIONEER

Flite M-91 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms from 20-20,000 Hz with THD 0.003%. Features direct signal paths; power supply with one cast-iron transformer per channel; 16 130-W output transistors; honeycomb heat sink and insulators. CD- and line-direct inputs. A/B speaker switch-ing; level controls. FR 20-20,000 Hz +0, -0.1 dB: S/N 125 dB. 18 x 61/2 x 17 in...

Elite M-72 200-W Amplifier 4 channels. 50 W x 4 into 8 ohms from 20-20,000 Hz with 0.02% THD, or 100 x 2 with 0.009% THD. Semiconductor nonlinearity cancellation; power transformer and heat sink insulated from chassis; direct signal paths, 2 inputs; headphone jack. 2 input-sens controls. FR 5-150,000 Hz +0, -3 dB; S/N 120 dB in 2-ch mode. 18 x 61/2 x 161/4 in: 48 lb\$1,000

PROTON

151/2 in; 28 lb.

AA-1600 360-W Amplifier 6 channels. Designed for home theater systems 60 W x 6 into 8 ohms; bridgeable from 3 to 5 channels at 150 W. FR 20-20,000 Hz ±5 dB; THD 0.05%; S/N 113 dBA; damping factor 100; dynamic headroom 2.5 dB. 16½ x 4½ x

\$700

AA-2120 120-W/ch Amplifier

2 channels, 120 W x 2 into 8 ohms, Features dual-mono design with 2 separate power supplies and 2 discrete amplifiers in single chassis; protection circuitry. Gold-plated connectors. Dual peak-level power meters. FR 20-20,000 ±3 dB; THD 0.01%; S/N 100 dBA; damping factor 100; dynamic headroom 2.5 dB, 161/2 x 434 x 1534 in: 31 lb... .\$700 AA-2080. As above, 80 W x 2; 28 lb........\$600

PS AUDIO

PS 200 Delta 200-W/ch Amplifier

2 channels. 200 W x 2 into 8 ohms or 400 x 2 into 4 ohms. Features dual-mono design; Class A circuitry: EMI/RFI filtration; fuse protection; 80,000-µF capacitance in power supply; low feedback design; line-conditioned power supply; glass-epoxy circuit board; direct-coupled inp to-output path. Balanced inputs. THD 0.1%; slew rate 150 V/µs. 17 x 6 x 17 in; 64 lb...\$2,095 Without balanced inputs...

PS 100 Delta 120-W/ch Amplifier

2 channels, 120 W x 2 into 8 ohms or 200 x 2 into 4 ohms. Dual-mono design; 60,000-µF power-supply capacitance: low-feedback design; direct-coupled input and output. THD

0.1%. 17 x 6 x 17 in; 43 lb Studio V 120-W Mono Amplifier

I channel, 120 W into 8 ohms, Features Class A/AB design; discrete circuitry; FET up to Class A/B high current; bipolar transistors; toroidal transformer; 54,000-µF power supply; independent regulated supplies for each stage; OFC wiring: thermal, DC-offset, and short-circuit protections. XLR and RCA inputs. Rackmount optional. THD 0.1%; S/N 97 dB at 1 W, 8 ohms; slew rate 200 V/us. Wood or black acrylic finish. 5-yr warranty. 22 lb......\$1,990/pr Studio IV. As above, 2 channels, 100 W x 2 into 8 ohms. Gold-plated inputs and 5-way binding posts. S/N 92 dB at 1 W, 8 ohms; slew rate 100 V/us, 24 lb ...

QUAD Model 606II 160-W/ch Amplifier

2 channels, 160 W x 2 into 8 ohms or 220 x 2 into 4 ohms. Features Class A current dumping circuit; feed-forward error correction; 60,000uF toroidal transformer; two independent power supplies. FR 10-40,000 Hz -1 dB; THD 0.01%; S/N 105 dB; dynamic headroom 4 dB, 12 x 5 x 9 in: 27 lb. \$1.395 Model 306. As above, 60 W x 2 into 8 ohms or 80 x 2 into 4 ohms. 18,800-µF toroidal transformer. 12 x 3 x 8 in; 11 lb... \$695

QUICKSILVER

Model 135 135-W Tube Mono Amplifier I channel. 135 W into 4 or 8 ohms from 20-20,000 Hz. Features hand wiring: 12AU7. 12FQ7, and six EL34 tubes. Meter; bias controls. 70 lb..... \$2,800 Silver. As above, 90 W into 4 or 8 ohms from 20-20,000 Hz. 12AX7, 12BH7, 5AR4, and matched-pair KT88 tubes. 9¼ x 6 x 15¼ in;

37 lb. KT-88. As above, 60 W into 4 or 8 ohms from 20-20,000 Hz, Two KT88, two 12FO7, and 5AR4 tubes, 91/4 x 6 x 141/4 in; 30 lb

GLA 40-W/ch Tube Amplifier 2 channels. 40 W x 2 into 4/8 ohms from 20-

20,000 Hz. 12AX7, 6922, and EL34 tubes; hand wiring, 171/2 x 111/2 x 6 in; 48 lb.....\$1,195

PCA PA4500M 175-W Amplifier 5 channels. Designed for home theater systems.

50 W x 3 rms (front left, right, center) + 12.5 x 2 (rear). Front L/R, center, and rear line-level RCA inputs. Auto turn-on; LED indicator. FR 20-20,000 Hz ±1 dB (front), 100-10,000 Hz ±1 dB (rear); THD 0.5%; S/N 90 dBA. 81/4 x 41/2 x 13 in; 16 lb... \$249

REEL TO REAL DESIGNS Legacy 220-W/ch Amplifier

2 channels. 220 W x 2 into 8 ohms or 380 W x

2 into 4 ohms. Features Class A/AB design: 2ohm stability; direct coupling; 1,400-W toroidal transformer with 100,000 µF storage; zero-negative-feedback design; 20 output devices; fuse protection. Balanced-XLR and unbalanced-RCA inputs; 4 pairs of gold-plated biwire 5way binding posts. 17 x 6 x 15 in; 48 lb ...\$1,995



ROTEL RB990BX 200-W/ch Amplifier

2 channels. 200 W x 2 cont avg into 8 ohms from 20-20,000 Hz with 0,03% THD. Features power transformers with senarate rectifiers and filter capacitors. FR 4-100,000 Hz +0.5 dB, -3 dB; S/N 120 dB; damping factor 1,000. 17% x 4¼ x 14¼ in; 32.5 lb.... \$1,000 RB980BX, As above, 120 W x 2 or 360 x 1 cont avg into 8 ohms from 20-20,000 Hz with 0.05% THD. 171/4 x 43/4 x 121/4 in; 22.4 lb......

RB956AX 180-W Amplifier

6 channels. Designed for home theater system 30 W x 6 cont into 8 ohms. Bridgeable. THD 0.03%; S/N 80 dB. 17½ x 4¼ x 12¼ in.....5500

RB960BX 60-W/ch Amplifier 2 channels, 60 W x 2 cont avg into 8 ohms from 20-20,000 Hz with 0.03% THD or 180 x 1 cont avg into 8 ohms. Features dual power transformers with separate rectifiers and filter capacitors. FR 15-100,000 Hz +0, -1 dB; S/N 116

dB; damping factor 280. RB930AX, As above, 30 W x 2....

JEFF ROWLAND Model 8 250-W/ch Amplifier

2 channels. 250 W x 2 cont avg into 8 ohms, 400 x 2 into 4 ohms, or 600 x 2 into 2 ohms. Features FET front end; bipolar outputs; no negative feedback; toroidal power supply, RCA and XLR inputs. Selectable 26/32-dB gain; input mute and phase switches. THD 0.02% at 1,000 Hz; S/N 120 dB; slew rate 100 V/µs; damping factor 250

Model 1 60-W/ch Amplifier

2 channels, 60 W cont avg x 2 into 8 ohms, 120 x 2 into 4 ohms, or 215 x 2 into 2 ohms. Features differential FET circuitry; 600-VA toroidal transformer, RCA and XLR inputs, Selectable gain, FR 0.3-300,000 Hz +3 dB; THD

SONANCE

Sonamp 2120 120-W/ch Amplifier 2 channels, 120 W x 2 into 8 ohms with 0.05% THD or 160 x 2 into 4 ohms with 0.1% THD, all rms from 20-20,000 Hz. Features discrete output transistors; thermal, surge, and overload protections, 2 line-level outputs, Defeatable to turn-on; input-level controls. 1614 x 51/4 x 125% in; 23 lb.

Sonamp 260 60-W/ch Amplifier 2 channels. 60 W x 2 into 8 ohms, 100 x 2 into

STEREO REVIEW FEBRUARY 1994 83

4 ohms, or 125 x 2 into 2 ohms. Features shortcircuit protection: 2-ohm stability. Line-level RCA outputs; 5-way binding posts. Input-level controls; defeatable remote turn-on; status indi-Sonamp 260x3. As above, with switching for 3 speaker pairs.

SONOGRAPHE SA150 120-W/ch Amplifier

2 channels. 120 W x 2 into 8 ohms. Features MOSFET output stage. 17 x 51/4 x 13 in\$995

SONY TA-N80ES 200-W/ch Amplifier

2 channels. 200 W x 2 cont into 8 ohms with 0.004% THD, 270 x 2 cont into 4 ohms with 0.006% THD, or 580 x 1 into 8 ohms with 0.007% THD, all from 20-20,000 Hz. Features discrete output transistors in triple push-pull configuration; 2 protection circuits. Fixed and vari-able inputs; XLR inputs; variable L/R input sens. Dumping factor 100; dynamic headroom 2.8 dB at 4 ohms. Simulated-wood side panels. 18% x 7% x 17% in; 52.9 lb...

TA-N55ES 110-W/ch Amplifier 2 channels. 110 W x 2 cont into 8 ohms with 0.004% THD, 150 x 2 cont into 4 ohms with 0.006% THD, or 300 x 1 into 8 ohms with 0.007% THD, all from 20-20,000 Hz. Features discrete output transistors; 2 protection circuits. Fixed and variable inputs. A/B speaker switching. Damping factor 100; dynamic headroom 2.8 dB at 4 ohms. Simulated-wood side punels. 18½ x 6 x 14½ in...

TA-N220 180-W Amplifier

4 channels, 45 W x 4, 100 x 2, or 45 x 2 + 100 x I cont into 8 ohms from 20-20,000 Hz with 0.08% THD, 4 banana-plug outputs, 2 input sens controls; status indicators. FR 7-100,000 Hz +0, -2 dB; S/N 90 dB. Simulated-wood side panels, 18% x 5% x 14% in: 20.4 lb.....

SOUNDSTREAM

DA-2 THX 200-W/ch Amplifier 2 channels, 200 W x 2 into 8 ohms, 350 x 2 into 4 ohms, or 500 x 2 into 2 ohms. Features THX certification; Class G topology. Gold-plated XLR and RCA inputs; gold-plated 5-way binding posts. 10 lb.

SA-100 50-W/ch Amplifier

2 channels. 50 W x 2 into 4 ohms, 90 x 2 into 2 ohms, or 180 x 1 into 4 ohms. Features hideaway design for multiroom applications: 1-ohm stability. Remote speaker switching via RSS-2 salector.

SUMIKO

CTA-504 60-W/ch Tube Amplifier 2 channels, 60 W x 2 cont avg into 8 oh THD 0.08%: slew rate 80 V/us. 63 lb\$2,750

SHMA

Andromeda III 240-W/ch Amplifier 2 channels, 240 W x 2 into 8 ohms or 400 x 2 into 4 ohms. Features MOSFET design: no negative feedback; fully balanced path from input to output; pure Class A operation except for Class AB output stage. XLR inputs. THD 0.05% into 8 ohms, 0.1% into 4 ohms. 19 x 7 x 16¾ in; 55 lb...

The Five 60-W/ch Amplifier

2 channels, 60 W x 2 into 8 ohms, 120 x 2 into 4 ohms, or 240 x 2 into 2 ohms, Features Class A MOSFET design; no negative feedback; proprietary linearization circuit. XLR inputs; gold-plated connectors, 19 x 7 x 1634 in; 55 lb\$1,699

Polaris III 120-W/ch Amplifier

2 channels. 120 W x 2 or 350 x 1 into 8 ohms. Features Class AB MOSFET design; proprietary MOSFET linearization circuit: pure Class A gain stage. XLR inputs. THD 0.05% into 8 ohms. 0.1% into 4 ohms, 19 x 51/4 x 10 in; 35 lb \$849

SUPERPHON SA-120 60-W/ch Amplifier

2 channels, 60 W x 2 into 8 ohms or 100 x 2 into 4 ohms. Features differential Class A circuit with MOSFET and bipolar transistors in Class AB current-dumping output stage. Gold RCA inputs; 5-way binding posts. FR 0.5-300,000 Hz; THD 0.05%; S/N 97 dB; slew rate 150 V/us. 17 x 4 x 13 in: 24 lb...

THRESHOLD

T500 250-W/ch Amplifier 2 channels, 250 W x 2 Class AB or 125 x 2 Class A. Features switchable Class A/AB operation; microprocessor thermal-stability cont 4 separate gain stages; fully regulated and decoupled front ends; short-path circuit execution; 64 IGBT output devices, 4 sets of output posts: balanced and single-ended inputs. FR 0-150,000 Hz: slew rate 150 V/us ...

T200 100-W/ch Amplifier

2 channels. 100 W x 2 or 330 x 1. Features Class A design; 28 IGBT output devices; fully regulated separate front end; separate L/R power supplies; high-bias cascode/FET front-end; shortpath circuit execution, Balanced and unbalanced inputs; 4 sets of output posts. Mono switch. FR 0-100,000 Hz; slew rate 100 V/us\$3,850

T100 50-W/ch Amplifier 2 channels, 50 W x 2 or 180 x 1, Features Class A design: 24 IGBT output devices: decoupled front-end separate supply; high-bias cascode/ FET front-end; short-path circuit execution. Balanced and unbalanced inputs: 4 sets of output posts. Mono switch. FR 0-100,000 Hz; slew rate 60 V/as

YAMAHA

MX-1 200-W/ch Amplifier 2 channels. 200 W x 2 rms into 8 ohms with 0.008% THD or 350 x 2 rms into 2 ohms from 20-20,000 Hz with 0.09% THD. Features goldplated PC-board wiring: twin transformers: antivibration antiresonance chassis; Class A amplification; linear damping circuit. Link for CX-1 or CX-2 preamplifier; 3-way binding posts; gold-plated solid-brass inputs. A/B speaker switching. S/N 125 dB; damping factor 350. 7½ x 4½ x 19½ in; 53 lb...... MX-2. As above, 150 W rms x 2 into 8 ohms with 0.008% THD or 230 W rms x 2 into 2



ohms with 0.09% THD. S/N 123 dB. 171/4 x 41/4 x 191/4 in: 42 lb.

MX-630 135-W/ch Amplifier 2 channels, 135 W x 2 into 8 ohms or 500 x 1

into I ohm. Banana-plug outputs. A/B speaker switching: independent L/R level controls; clit ping indicators. THD 0.003%. 29 lb\$499

MX-460 80-W/ch Amplifier 2 channels, 80 W x 2 rms into 8 ohms from 20-20,000 Hz with 0.012% THD. Features symmetrical input-to-output design; direct ground-sens-

PRESMPLIFIERS

ACOUSTIC RESEARCH Limited Preamplifier Model 2

2 balanced and 3 unbalanced inputs; balanced and unbalanced outputs. Features 58-step attenuator using Dale metal-film resistors; 4-layer switch for muting and phase inversion. THD 0.002%: S/N 110 dBA, 19 x 4 x 13 in.....\$2,200

ACURUS L10 Preamplifier

6 inputs: 2 outputs: gold-plated connectors. Features discrete Class A circuitry; polypropylene capacitors; silver-to-silver switch contacts; glass-epoxy circuit board; 1% metal-film resisors. 17 x 3 x 9 in...

ADCOM GTP-600 A/V Preamplifier/Tuner

4 line-level audio inputs; 4 composite/S-video inputs and outputs; composite and S-video monitor outputs; gold-plated RCA connectors. Features DSP. Dolby Pro Logic decoder; multiple surround modes including Cinema augmentation of Dolby Pro Logic; rear-channel delay up to 100 ms; on-screen displays; programmable re-mote control. 17 x 4½ x 11½ in; 17 lb.....\$1,000

GFP-565 Preamplifier

5 line-level inputs; MM/MC phono input; 3 out-puts; signal-processor loop. One direct-coupled output; Class A circuitry; 1% metal-film resistors and metallized-film capacitors on doublecopper-plated glass-epoxy printed circuit board; separate headphone amplifier. Record-out selector; loudness control. FR 5-90,000 Hz ±0.5 dB; THD 0.009% phono, 0.0025% line; S/N 95 dBA phono, 100 dBA line; ch sep 75 dB at 1.000 Hz. 17 x 3 x 11% in: 11 lb...

GTP-500II Preamplifier/Tuner 4 line-level inputs: MM phono input. Features

AC- and DC-coupled outputs; 1% metal-film resistors in all critical applications; quartz-referenced digital-synthesis tuning; high-blend circuit. Auto scan tuning; 8 AM/FM presets; LED signal-strength display; remote control. Remote sensor for multiroom applications optional. FR 5-65,000 Hz ±0.5 dB; S/N 85 dBA phono. FM: S/N 75 dB stereo; THD 0.09% at 1,000 Hz stereo, 17 x 3¼ x 12¼ in: 16 lb...

GFP-555II Preamplifier 5 line-level inputs; MM and MC phono inputs;

bypass output; signal-processor loop. Features AC- and DC-coupled outputs; 2-sided copperplated circuit board; 1% Roederstein resistors and film capacitors; separate headphone amp. Switchable phono-input capacitance and gain; tape dubbing capability; record-out selector. FR 5-85,000 Hz ±0.5 dB; THD 0.02% phono, 0.003% line; S/N 90 dBA phono, 100 dBA line 17 x 3 x 11% in: 12 lb...

GTP-450 Preamplifier/Tuner

5 line-level inputs; signal-processor loop. 14 AM/FM presets; remote control. 17 x 3 x 121/2 in: 14 lb.

GTP-350 Preamplifier/Tuner 5 line-level inputs. 14 AM/FM presets; recordout selector. 17 x 3 x 121/2 in: 14 lb.....



AMC

AV81 A/V Preamplifier 8 audio inputs, 4 composite-video inputs: buffered video and record outputs. Record-out selector; remote-controlled source selection. THD 0.01%: S/N 95 dBA ... \$500 AV81HT. As above, with Dolby Pro Logic decoder. Features left, right, center, 2 rear, and subwoofer outputs AV81THX, As above, THX certified, Features re-equalization circuitry for high-frequency response; decorrelation circuitry for rear-channel

ARAGON

Aurum Preamplifier Features Class A circuitry; dual-mono design; Teflon dielectric wiring; Penny and Giles volume control. 19 x 3½ x 14 in\$1,750

Model 18K Preamplifier 6 inputs: 2 outputs. Features Class A circuitry: dual-mono DC power supply; gold-plated con-

nectors. 19 x 3 x 11 in ... ARCAM Delta 110 Digital Preamplifier

Coaxial and fiber-optic digital inputs; 5 analog inputs; MC/MM phono inputs; 2 tape loops. Features 1-bit D/A converter; separate toroidal power transformers for digital and analog sec-

tions; standby mode. Record-out selector; peaker switching; remote control......\$1,500 Delta 110S. As above, without digital inputs. 6 analog inputs ..

AUDIO BY VAN ALSTINE FET-Valve Tube Preamplifier Phono inputs; 2 tape loops; 5 line-level inputs;

headphone iack. Features hybrid vacuum tube/ MOSFET design; voltage and current-overload protections; toroidal transformer; straight-line design: regulated power supplies. Volume and balance controls. 12 x 3½ x 9 in; 8 lb\$995

Super Pas 4i Tube Preamplifier

Gold-plated phono input; 5 gold-plated line-level inputs; 2 tape loops; headphone jack. Features straight-line vacuum-tube voltage-gain circuits followed by solid-state current drivers; toroidal transformer; regulated power supplies; ceramic selector switch: 240-V operation. Volume and balance controls. Black anodized facenlate \$705 Kit version of above ... \$595

AUDIO DESIGN

ADP-8 Preamplifier 5 inputs; 3 tape loops; signal-processor loop; 2 outputs; switched AC outlet. Balance, bass, midrange, and treble controls. FR 20-20,000 Hz ±0.25 dB; THD 0.05%; S/N 85 dB, 3½ x 19 x 11½ in: 8 lb

AUDIO INNOVATIONS

Series 200 Preamplifier MM/MC phono input; 4 line-level inputs; 2 main outputs; tape output. Features Noble cor ductive plastic-film potentiometers. 13 lb...\$600

AUDIO RESEARCH LS2 Tube Preamplifier

6 line-level inputs; 1 RCA and 2 XLR outputs; gold-plated connectors; defeatable tape outputs. Features hybrid FET/tube Class A circuitry; gold-contact input selector; active feedback circuit; 3 decoupled electrolytic capacitors; automuting circuit. 41-detent attenuator. FR 1-100,000 Hz +0.5, -3 dB; S/N 100 dB. 19 x 51/4 v 10% in: 13 lb LS2B. As above, balanced inputs. 14 lb .. \$2,995

SP-9 MkII Tube Preamplifier

2 tape loops; MC phono input; gold-plated connectors. Features vacuum tubes in phono and line stages; shielded toroidal power transformer; auto mute circuit. Mute switch; tape-monitor controls. FR 5-50,000 Hz ±0.5 dB line, 20 20,000 Hz ±0.3 dB phono ...

LS3 Preamplifier 7 line-level inputs; 3 outputs. Features DC-coupled inputs; regulated power supply; direct gain path. Input selector switch. FR 2-100,000 Hz -3 \$1.495 dB. 19 x 51/4 x 101/4 in; 11 lb ... LS3B, As above, with balanced output...\$1,995

AUDIOSOURCE

Pre-One Preamplifier 6 line-level inputs; MC phono input; 2 main outputs. Features electronic switching. Bass EQ; tape-dubbing capability. THD 0.008%; S/N 100 dB \$250

AUDIRE Diffet 3 Preamplifier

MM phono input. Features discrete circuitry: FET design; regulated power supply. MC phono input optional. FR 5-100,000 Hz; THD 0.005%; S/N 94 dB, 19 x 21/4 x 7 in

Legato Preamplifier MM phono input; 5 line-level inputs; 2 tape loops; two outputs. Features regulated power

supply; subsonic filter. FR 0-100,000 Hz +0, -0.25 dB; S/N 90 dB, 19 x 21/4 x 7 in. B&K COMPONENTS AVP2000 A/V Preamplifier 8 audio, 4 composite-video, and 3 S-video inputs; 5 line-level outputs; 4 composite-video and 3 S-video outputs; balanced-XLR outputs and signal-processor loop for one zone. De-signed for 2 zones. Independent volume, balance, mute, and source-select controls for each zone; 8 system presets per zone; remote control. FR 1-150,000 Hz ±1 dB; THD 0.02%; S/N 89 dBA line. 17 x 3½ x 12 in; 19 lb....

Sonata Pro-10MC Preamplifier 6 inputs; MM/MC phono input; 2 line-level and

2 balanced outputs; tape loop. Features discrete DC-coupled circuit topology; external power supply. Record-out selector, FR 1-150,000 Hz; THD 0.02%. 17 x 3½ x 12 in; 22 lb...

CS-117 Preamplifier 4 line-level inputs: 1 switchable phono/line-lev-

el input; 2 line-level outputs; 1 balanced output; I tape loop. Features selectable passive mode: one controls. FR 1-100,000 Hz; THD 0.02%; S/N 89 dB. 17 x 21/2 x 9 in; 10 lb ... \$308 CS-115. As above, no tone controls

BOULDER L5AE Preamplifier

Two balanced XLR inputs; 4 RCA inputs; balanced and unbalanced outputs. Tape-monitor controls...

L3AE Preamplifier

5 line-level inputs: balanced XLR outputs: tape loop; gold-plated connectors. Phono input op tional. THD 0.0025% ...

BRYSTON

BP-5 Preamplifier Phono input; 3 line-level inputs; balanced output; tape and processor loops. Features 2-stage phono section; no internal wiring with components plugging directly into boards; volume control laser-trimmed to 0.25 dB accuracy. FR 22-20,000 Hz; THD 0.005%; S/N 80 dBA phono, 95 dBA line. 20-year parts-and-labor warranty. 19 x 1% x 8 in ...

CAMBRIDGE AUDIO C100 Preamplifier

Gold-plated MM/MC phono inputs; 2 tape loops. Features toroidal power transformer. FR 5-130,000 Hz: S/N 80 dB MM, 75 dB MC, 94 dB line. 17 x 31/4 x 121/2 in; 10 lb\$700

Gold-plated MM/MC phono inputs; tape loop. Features toroidal power transformer; passive EQ in RIAA stage. Defeatable tone controls. FR 10-140,000 Hz; S/N 75 dB MC, 80 dB MM, 95 dB line

Sonic Holography refers to proprietary circuitry to enhance sound-stage ambience. ACCD refers to proprietary multipath-rejection circuitry.

C-19 Tube Preamplifier 7 inputs including MM phono, MC phono, and

CD-direct; 2 signal-processor and 2 tape loops; one main output with solid-state transfer characteristic: one main output with vacuum-tube transfer characteristic; headphone jack; 6 AC outlets. Features four 6DJ8 vacuum tubes; infrasonic filter. L/R tone controls with variable turnover; adjustable gain; mono/stereo and absolute-phase switches; tape-dubbing capability. CT-29v A/V Preamplifier/Tuner

3 video inputs, 8 undio inputs, 6 outputs, 5 video connectors, Feature DSF for surround, variable Vocal Zoom circuity to improve dia-variable Vocal Zoom circuity to improve dia-variable Vocal Zoom circuity to improve dia-variable fund capabilities for 2 zones; Dolby Pto Logic decoder and 5 other sarround modes, variable fund edily; sauto round-level controls; on-screen displays; personnelle AV renote control. 51:200
CT-27v. As above, without 2-zone capabilities control to programmable AV renote control co

C-15v A/V Preamplifier

3 composite-video inputs: 15-video inputs: and in inputs for 8 audio and 3 video sources; 6 outputs: 2 rear line-level outputs: composite-and 5-video montro outputs; 2 VerR loops; 2 for surround: variable Vocal Zoom circuitry to improve intelligibility of center-handed dialog. 18-dB/oct subwoofer crossover. Dolby Pro. Logic decoder and 5 other surround modes: anto input balance, continuously variable vocal 250m circuitry to 2000 control of 2000 control outputs.

CT-3 Preamplifier/Tuner

6 audio inputs; 3 video inputs; 2 video outputs; pre-outfination loope, switchable cabelianeams inputs; 2 AC outlets. Features Sonic Holography; ACCP; notor-driven volume control, 30 AM/FM presets with scan; auto/manual tuning; signal-strength indicator; bass, treble, and balance controls; sleep timer; remote control. FR 20-20,000 Hz 21 dB. FM: AM et § 62 dB; cg. paraito 2.2 dB; alt-ch sel 65 dB; S/N 78 dB sterce; TID 0.25% at 1,000 Hz.

CELLO

Audio Suite Modular system built around an open-architecture mainframe that accepts up to 10 slide-in vertical modules (sampline listed below). Can

control multiroom and multimedia s	ystems.
P101. MC phono input	\$3,800
P301. Output	\$3,800
Master Power Supply, 120 V	\$3,000
P201. Digital processor input	
Mainframe Chassis	\$2,000
B301. Output	

\$1,700

\$1,700

\$1,700

\$1,700

B100. MM phono input......

P200. CD input..... P200. Tuner input...

P200, Video input

Classé Six Preamplifier

MM/MC phono, balanced, and 5 line-level inpots; balanced, unbalanced, and buffered tape
outputs, Features 27-V output. Input, mode, and
bypass selectors; tape-monitor and mute switches. Remote control optional. FR 20-20,000 Hz
\$\Delta\$ (18) ThD 0.1%; \$\Sigma\$ (85 dB phono.) 95 dB

Without phono stage. \$2,995
Remote control \$300
Classé Five. As Classé Six, 24-V output. \$2,295
Without phono stage. \$2,100
Remote control \$300

Remote control \$300
Classé Four. As Classé Five, no bypass selector. Output 20 V. 19 x 12% x 3% in \$51,95
Without phono stage. \$1,495
Remote control \$200



Cello Palette

CONRAD-JOHNSON PV12 Tube Preamplifier

Piono and line-level inputs: 2 tape loops. Features cathode follower outputs and solid-state voltage regulator designed for minimal AC impedance, regulated power supplies; audio-circuits with 1% tolerance; military-spec deposited in-oxide resistors; polysyteme capacitors. Volume control with 0.5-dB tracking: auto turn-oxi off mate; FR 2-100,000 Hz; THD 0.5% 16 x 3½ x 10 in; 15 lb. \$2,395 PVIZB. As above, no obnoor state. \$1,795

PF2 Preamplifier

FT2-FT2ampniner
Phono and 4 line-level inputs. Features all-FET
design: distortion-canceling circuitry; polypropylene and polystyrene audio circuitry; powersupply capacitors; metal-film resistors. FR 275,000 Hz 40, -3 dB: THD 0.1%, 19 x 39½ x
12½ in; 16 lb.
PTL. As above, no phono stage. \$1,395
PTL. As above, no phono stage. \$1,395

PV10A Tube Preamplifier

Phono and 5 line-level inputs: 1 tape loop. Features zero-leedback circuits in both line and phono stages; 2 triode amps separated by passive RIAA EQ network: 5 vacuum tabes; discrete regulated power supply with polypropylene and polystyrene capacitors. Balance-bass switch. THD 0.01%. 16 x 11 x 31/s in... \$1,095 PV18AL. As above, no phono stage. \$855

COUNTERPOINT SA-5000 Tube Preamplifier

MC and MM phono injusts. 5 line-level injusts. Features sube/iolid-state designs, separate regulated tube power supply; absolute-phase control: adjustable phono gain: buffered output. FR 4-60,000 Hz 101. dB; THD 0.01%. 19 x 40 x 12% in: 39 lb. 32.4-300. As above. FR 8-40,000 Hz 201. Bt. 22 lb. 22 lb. As 50-300, no phono injusts. 51,595 SA-2000. As SA-3000, no phono injusts. 51,595 SA-2000. As SA-3000, no phono injusts. 51,595 SA-2000.

SA-1000 Tube Preamplifier MC/MM phono inputs; 3 line-level inputs. Fea-

 Solid-8 Preamplifier

6 line-level inputs; 2 tape loops. Features FET design. FR 1-500,000 Hz ±1 dB; THD 0.03%; S/N 87 dB 19 v 216 v 10 in: 14 lb \$995

CROWN INTERNATIONAL PSL-2 Preamplifier

Phono and line-level inputs. Subsonic filter: loudness circuit; auto mute protect, defeatable tone controls; balance control; overload, rumble, and signal-presence indicators; tape-dubbing capability; adjustable phono input gain. FR 10-50,000 Hz ±0.25 dB; S/N 103 dB, 19 x 19x 11½ in: 11 lb x 10 cm.

DB SYSTEMS DB-1A/DB-2A Preamplifier

DB-100-2A Presignment
Pheno and line-level inputs. Features separate
DB-2A regulated power supply; 20 - and 36-Hz
low-cur filters; 5,000- and 10,000-Hz high-cufilters. FR 10-40,000 Hz ±0.07 dB phono, 250,000 Hz +0.1 dB line: ThD 0,0008%; SN
89 dBA phono, 90 dBA line. 5-yr warranty. 8½
x3/4x 7 in.

S33
DB-1B/DB-2A. As above; gold-plated conneters. Features 80-0B Albs fracking volume conters. Features 80-0B Albs fracking volume con-

DENNESEN JC-90 Mono Preamplifier

MC phono input; balanced outputs; polarity inverter. THD 0.005%; S/N 100 dB\$3,200

DENON AVP-5000 Digital A/V Preamplifier

4 fiber-optic and 2 couxial digital inputs; 1 fiber-optic digital coupts; 1 analog audio inputs; 8 variable and 4 fixed analog audio uput; 4 video inputs; 6 video cutaputs; composite and 5-video inputs. Features 2 digital (Cs. per Per Logic, and surroad-to-and finations; 2 ludee-type and 4 All hybrid mital(1)-bit D/A converters; dasl Signa-Delta AD converters; 3band parametric EQ; signal compression and expansion; adjostable delay time (0-180 ms) and re-ortheration in surroad and some fields more control. See the converter of the converter of the control of the control of the converter of the control of the control of the converter of the control of the c

PRA-1500 A/V Preamplifier

PAS-4 Tube Preamplifier

4 line-level inputs; MM phono input; 2 tape loops; signal-processor loop. Features four 6DJ8 and two 12AX7 tubes. Tape-dubbing capability. THD 0.25%; S/N -86 dB. 17 x 3½ x 12½ in: 12 lb. \$898

PAT-5 Series II Preamplifier

5 line-level inputs: 2 tane loops: signal-processor loop; headphone jack; gold-plated inputs. Features phase-inverted outputs. Remote control. THD 0.02%; S/N 100 dB. 17 x 31/2 x 121/4

PAT-6 Preamplifier/Tuner

5 line-level inputs; 2 tape loops; headphone jack. Features MPX filters. 18 presets; tone controls; remote control, THD 0.02%; S/N 100 dB 17 x 3 x 12½ in: 8 lb ... \$495

FORTÉ F44 Preamplifier

6 line-level inputs; tape-monitor loop; 1 unbalanced and 2 balanced outputs; gold-plated connectors. Features noninverting FET design; matched gain devices enhanced with discrete pure Class A biasing; active constant-current sourcing; glass-epoxy circuit boards. Listening/ record selectors; balance control; remote control. THD 0.05%: S/N 100 dB... \$1.250 F45. As F44, without remote control

FOSGATE AUDIONICS

Model Four A/V Preamplifier 6 channels: 7 surround modes including Dolby Pro Logic. 4 composite-video, 2 S-video A/V inputs. A/V source selection; separate record bus; pink-noise generator; remote control

HAFLER

Model 915S Preamplifier 5 line-level inputs; MM/MC phono input; 1 tape loop; headphone jack. Features Class A J-

FET topology, THD 0.02%; S/N 100 dB, Black, 7-yr warranty. 19 x 13/4 x 75/6 in; 8 lb........\$800 Model 915. As above, silver. Rack mountable. 17 x 1% x 7% in...

Model 945 Preamplifier/Tuner 5 line-level inputs: 2 tape loops: A/V output:

headphone jack. Features Class A J-FET line amplifiers; MPX filters; double bulanced mixer. 18 tuner presets; defeatable tone controls. THD 0.02%; S/N 100 dB. Rack mountable, 7-vr warranty. 19 x 2½ x 10½ in: 10 lb.,

HARMAN KARDON AP2500 Preamplifier

5 inputs including tape; MM/MC phono input. Features low-induction geometry; all-discrete circuitry from input to output.

PT2300 Preamplifier/Tuner

7 inputs; 2 A/V inputs; 2 VCR/tape monitors; 1 subwoofer and 2 line-level outputs. Features dubbing capability. 16 AM/FM presets; remote control

HEYBROOK

C-3 Preamplifler MM, MC, tape, and 5 line-level inputs. Features verload protection; aluminum chassis. FR 10-50,000 Hz ±3 dB, 17 x 3 x 13 in; 8 lb

JRM

JRM Preamplifier MM and MC phono inputs; 4 line-level inputs Features polypropylene capacitors; gold-plated electromechanical devices: 2-stage RIAA EO

with ±0.1 dB conformity: 18-dB subsonic filter: 10 W x 2 headphone amp. Separate input selectors for main, record, and out, FR 0-50,000 Hz +0, -1 dB; THD 0.001%; S/N 76 dB MC, 87 dB MM. 19 x 21/4 x 81/2 in

KENWOOD KC-X1 A/V Preamplifier/Tuner

5 audio inputs, including phono; 4 video inputs, including 2 S-video; 6 line-level outputs, including subwoofer. Features Dolby Pro Logic decoder with Home THX mode: DSP ambience mode with adjustable (1-80 ms) surround-channel delay; AM/FM tuner with 30 presets; onscreen display. 171/4 x 61/6 x 15 in.....



KINERGETICS

KPA-3 Preamplifier 4 line-level inputs; tape and processor loops; balanced and unbalanced main outputs. Features Class A hybrid circuitry; J-FET/bipolar design. 171/2 x 2 x 131/4 in...

MARK LEVINSON Model 28 Preamplifier

7 inputs including 2 gold-plated balanced XLR inputs; MM/MC phono input; 1 selectable phono/line input; 5 unbalanced inputs; balanced and unbalanced main outputs; unbalanced outputs for 2 tape decks. Features dual-mono design; single custom transformer with separate windings and grounding systems; distributed power supply regulation; MM and MC phono modules each with 2 gain settings; custommade Teflon capacitors in RIAA sections of both phono modules; separate power supply. Preamp: 171/2 x 21/4 x 101/4 in. Power supply 8½ x 2½ x 13½ in: 29 lb..... \$3,995 Without phono stage... \$3.495

LINN Kairn Preamplifier

7 inputs; phono input; 3 line-level outputs. Remote-control operation; front-panel controls. 13 x 3½ x 13 in: 10 lb \$2.795 x 3½ x 13 in; 10 lb Without phono input.

Pretek Preamplifier 7 inputs; MC/MM phono inputs. 171/4 x 33/4 x 14 in: 14 lb...

MARANTZ SC-22 Preamplifier 4 line-level inputs; tape loop; normal and phaseinverted outputs. Features straight-line circuit topology; discrete Class A signal routing; lowpass filter in input stage to remove digital noise; balanced output transformers. FR 20-20,000 Hz

9¾ x 3¾ x 8½ in; 9 lb. AV-500 A/V Preamplifier

±1 dB; THD 0.03%; S/N 105 dBA. Gold finish. gold-plated RCA audio inputs; 4 gold-plated RCA video inputs: 4 S-video inputs: front-panel composite/S-video A/V input; 4 gold-plated RCA audio outputs; 3 gold-plated RCA video outputs; 3 S-video outputs; 3 gold-plated RCA line-level outputs for front, center, and surround: I unswitched and 2 switched AC outlets Features motor-driven volume control. Dolby Pro Logic decoder; auto input balance; matrix, movie-surround, 3-ch logic, and 2 concert-hall surround modes; adjustable digital delay; movable digital color PIP for 2 video sources; Dol-by test-tone generator; 3-, 5-, or 7-dB bass boost at 70 Hz; mute switch; on-screen displays; defeatable fluorescent display; remote control, 17% x 3% x 13½ in.

SC-80 Preamplifier

MM/MC phono input: 4 line-level inputs: 2 tape loops: normal and phase-inverted outputs: signal-processor loop. Features Class A design: all-discrete primary signal path; balanced output coupling; microprocessor-controlled switching; source-direct mode: motor-driven volume control. Defeatable narrow-Q bass and treble conrols; record-out selector; remote control. FR 20-20,000 Hz ±0.2 dB phono, 10-40,000 Hz ±0.1 dB line; S/N 75 dB MC, 91 dB MM, 95 dB line. Gold finish with die-cast alloy side panels. 17% x 4½ x 14¼ in....

METAXAS AUDIO

Charisma Preamplifier

I phono and 3 high-level inputs. Features separate power supply with filtering to minimize power-line hum; internal DIP switches to adjust phono resistance; tape record/monitor and mute switches. Preamp: 13¼ x 2½ x 9½ in. Power supply: 4 x 2 x 9½ in..... \$1.700 With phono stage... \$1.850

MCINTOSH

MX-130 A/V Preamplifier/Tuner 5 line-level inputs; 1 switchable phono/line-lev-

el input: 6 A/V inputs: front-panel A/V input: processor loop; balanced main outputs; 13 serial data ports: control connectors for 2 CD players. tuner, and SCR switcher; switched AC outlets. Compatible with CR-10 multiroom system and HC-1 controller. Dolby Pro Logic decoder with delay and calibration controls; AM/FM tuner; 2-zone control; variable loudness and tone controls; muting; remote control. FR 20-20,000 Hz +0, -0.5 dB; THD 0.002%; S/N 90 dB phono, 105 dB line. 171/2 x 71/4 x 17 in; 30 lb\$3,600 C-39. As above, without tuner ..

C-36 A/V Preamplifier

6 line-level, 1 phono, and 1 video inputs; two processor loops; switched AC outputs. Features electromagnetic switching; double-shielded power transformer; electronically regulated power supply. Separate listen and record selectors; variable loudness and tone controls; power-on muting. FR 20-20,000 Hz +0, -0.5 dB; THD 0.002%; S/N 90 dB phono, 105 dB line. 17½ x 5¾ x 15½ in; 18 lb.....\$1.700

C-712 Preamplifier

Balanced outputs; processor loop. Electromagnetic switching. Bass and treble controls; tape-monitor control. FR 20-20.000 Hz +0. -0.5 dB: THD 0.002%. 17 x 5\% x 15\½ in; 26 lb ...\$1,300

MELOS MA-220 Gold Tube Preamplifier

\$705

6 inputs including MM and MC; 2 processor

oops: balanced outputs: Tiffany connectors. Features 2-chassis dual-mono construction; zero-feedback amplification; regulated power supplies. FR 20-300,000 Hz +0, -0.5 dB; THD 0.09%; S/N 75 dB MM, 70 dB MC.......\$3,295 MA-220 Gold Line, As above, without phono \$1,995 MA-220 Gold Phono. As above, without line section.... ..\$1,395

MA-111B Preamplifier

MM/MC phono inputs; line-level input; tape loop. Aluminum chassis; external toroidal power supply. FR 2-300,000 Hz ±1 dB; THD 0.09%; S/N 70 dB MM, 65 dB MC.......\$1,395 MA-110B, As above, no phono stageS1,195

MERIDIAN Model 601 Digital Preamplifier

7 line-level inputs; MM/MC phono input; 4 unbalanced RCA and 2 balanced XLR outputs; 2 fiber-optic and 4 coaxial digital inputs; 2 fiberontic and 2 coaxial digital outputs: Meridian fiber-optic control input and output; headphone iack. Features DSP for RIAA and earlier phono equalizations, octave and speaker equalizations, loudness control, and headphone processing; Hafler surround decoding. Multiroom capabil ty; input-sens controls; remote control\$4,950

Model 603 Digital Preamplifier

2 coaxial and 2 fiber-optic digital inputs; 6 ana log inputs. Features 2-chassis design with digital-audio circuits, computer-control circuits, and power supplies in 1 chassis, D/A converters and analog audio circuitry in other; 1-bit PDM D/A converters; passive differential analog filtering; 8 regulated power supplies. Auto sampling-rate selection: 64-sten volume control: remote control. Sampling rates 32,000 and 48,000 Hz; S/N 106 dBA \$2,750

Model 501V A/V Preamplifier 6 composite-video inputs; 2 S-video inputs; 6 unbalanced-RCA inputs; 3 composite-video

outputs; 3 S-video outputs; 2 tape outputs; 2 variable analog outputs; RS-232 interface; headphone jack. Video switching; adjustable sens for each input; electronic volume control in 99 1-dB steps; 4-character alphanumeric display: remote controllable, MM/MC phono stage optional. 121/2 x 31/2 x 13 in .

Model 501 Preamplifier

6 unbalanced RCA inputs; 2 tape outputs; 2 variable analog outputs; headphone iack, Adjustable sens for each input: electronic volume control in 99 I-dB steps; 4-character alphanumeric display; remote controllable. MM/MC phono stage optional. 12% x 3½ x 13¼ in ..\$995

MOTIF

MP11 Preamplifier 4 line-level inputs; MM/MC phono input. Features all-FET design; polypropylene or polystyrene audio circuits and power-supply capaci-tors; metal-film resistors, FR 2-75,000 Hz +0. -3 dB; THD 0.1%. 19 x 31/2 x 12 in; 15 lb\$2,395

MTX SOUNDCRAFTSMEN P100 Preamplifier

5 audio inputs including phono; RCA jacks; headphone jack with volume control; one switched and one unswitched AC outlets. Features CMOS electronic switching. S/N 100 dB;

MUSEATEX

Melior AVC-1 A/V Preamplifier 4 audio inputs; 4 A/V inputs, 2 S-video; processor loop; balanced outputs. Programmable LCD interface; remote control. FR 1-100,000 Hz; THD 0.25%; S/N 95 dB. 16 lb......

MAD

Model 106 Preamplifier 5 line-level inputs; switchable MM/MC phone input; gold-plated connectors; balanced XLR outputs. Discrete phono stage; metal-film resistors. Defeatable tone controls; power-on muting; discrete headphone amp. FR 20-20,000 Hz ±0.2 dB; THD 0.01%; S/N 76 dB phono, 96 dB line. 16 x 31/4 x 101/2 in; 8 lb..

Model 1600 Preamplifier/Tunes 5 line-level inputs; MM/MC phono input; goldplated phono and CD inputs; signal-proces loop. FM blend; infrasonic filter. 14 AM/FM presets; bass EO; 2-way tape-dubbing capability: defeatable tone controls; rack mounting; re mote control. FR 20-20,000 Hz ±0.3 dB; THD 0.01%; S/N 75 dB phono, 100 dB line, FM; cap

NAD Model 106

ratio 1.6 dB; alt-ch sel 68 dB...

The following must be powered from either a Naim power amplifier with a preamp power supply or a Hi-Cap external power supply.

NAC 72 Preamplifier

5 line-level inputs. Features matched time-aligned filter. Mute/monitor switch. 11% x 3 x \$1,325 Hi-Cap preamp supply.....

Phono stage ...

NAC 92 Preamplifier I line-level RCA input; 4 line-level DIN inputs. Tape-monitor controls: balance control. Phono stage optional. 17¼ x 2¼ x 12 in. \$965 Phono stage ...

NAKAMICHI

CA-7A Preamplifier 6 line-level inputs; MM/MC phono inputs; 2 main outputs. Features separate digital and analog sections; isolated ground technology; multiroom remote control with RS-7 or RS-5 infrared sensors. FR 1-100,000 Hz +0, -3 dB; S/N 94 dBA. 171/4 x 31/4 x 121/4 in; 15 lb.

CA-5AII Preamplifier 5 line-level inputs; MM/MC phono inputs; gold-plated connectors. Multiregulated isolatedground power supply; bipolar transistors; FETs. Tape-dubbing capability; balance and tone con-trols. FR 1-100,000 Hz ±3 dB;S/N 95 dBA.

OCM TECHNOLOGY Model 55 Preamplifier

171/4 x 21/2 x 111/4 in; 11 lb...

Line-level input; 4 unbalanced, 2 main, and 2 tape outputs; gold-plated RCA connectors. Direct-coupled design; DC-servo loop; doublesided fiberglass-epoxy circuit board; silver-plat ed copper wiring. Dual monitoring capability. FR 20-20,000 Hz ±0.1 dB. Anodized black-alu-

ONKYO Integra P-388F Preamplifier

9 line-level inputs; MM/MC phono inputs; balanced CD input; 2 tape loops; balanced outputs. Features multistage balanced design; transformer designed to prohibit electromagnetic in-terference; motor-driven volume control. Record-out selector; remote control. THD 0.0005% line; S/N 81 dB MC, 92 dB MM. 18 x 31/4 x 161/2 in; 20 lb... \$1.200

Integra P-304 Preamplifier 8 inputs including MM/MC phono. Features alldiscrete signal path; in-phase signal filters; FET phono stage. Two record-out selectors; direct tone controls; side panels. THD 0.0005% line; S/N 81 dB MC, 92 dB MM. 181/4 x 4 x 151/6 in;

P-301 A/V Preamplifier

7 audio and 2 video inputs. Features source-direct mode; motor-driven volume control. Selective tone control: video-dubbing capability. FR 15-30,000 Hz ±1 dB; THD 0.009% line; S/N 92 dB MM 18 v 4% v 12% in: 9 lb

PARASOUND P/LD-1500 Preamplifier

6 line-level inputs; balanced XLR outputs; gold-plated connectors. Features dual-mono discrete design minimizing devices in signal path; complementary MOSFET drivers operating in pure Class A; CMOS input switching; gold-clad relays for polarity inversion, muting, and direct input; buffered outputs. Polarity-inversion switch. FR 5-135,000 Hz +0, -2 dB; THD 0.005% at 1,000 Hz; S/N 84 dB, 102 dBA. 19 x 3½ x 14 in: 18 lb.

P/HP-750H Preamplifier 6 inputs including phono; 2 line-level outputs. Features C-MOS input switching. Variable

loudness control; mono and tone-defeat switches. FR 5-65,000 Hz; THD 0.02%

PIONEER Elite Series The following feature cast-iron transformers, copper-coated capacitors, a video power supply, isolated transformers, a motor-driven vol-

ume control, and a bypass mode. C-91 A/V Preamplifier 5 audio inputs including 2 tape loops and one MM/MC phono input; 5 video inputs including 3 VCR loops; 3 S-video inputs and outputs;

gold-plated connectors. Features video enhancer; record-out selector; tape-dubbing capability; programmable remote control. FR 20-20,000 Hz ±0.2 dB MM, 20-20,000 Hz +0, -0.1 dB line THD 0.002%. 18 x 51/4 x 151/4 in; 23 lb\$1,300 C-72 A/V Preamplifier

5 audio inputs; 5 composite/S-video inputs including front-panel A/V input; gold-plated connectors. Multiroom capability: A/V-record selector; video-dubbing capability; programmable remote control. FR 20-20,000 Hz ±0.2 dB MM, 20-20,000 Hz ±0.3 dB MC, 1-150,000 Hz +0, -3 dB line; THD 0.002%. 18 x 61/2 x 161/2 in; 25 lb. .\$850

PS AUDIO

Reference Link LS Digital Preamplifier

5 analog inputs; coaxial, AT&T, AES/EBU, and Toslink fiber-optic digital inputs; digital and analog tape loops; 2 unbalanced and 2 balanced outputs. Features 20-bit D/A converter; 18-bit A/D converter; digital volume and balance controls; 14 individual regulation stages; 50,000-uF filter capacitance; 3 power supplies. LED dis-play. FR 20-20,000 Hz ±3 dB, 17 x 3½ x 16½ in: 28 lb ...\$4,795

PS 5.7 Preamplifier

MM/MC phono inputs; gold-plated connectors. Designed as PS 6.2 line stage and PS Phono Link phono preamp in single chassis. Features military-grade glass-epoxy circuit board; regulated diode-isolated power supply; passive phono EQ. Straight-wire and bypass switch. FR 20-20,000 Hz ±0.1 dB; THD 0.1; S/N 74 dB MC, 85 dB MM, 100 dB line. 17 x 21/2 x 9 in;

PS 6.2 Preamplifier

6 inputs; 4 outputs; gold-plated connectors. Features active or straight-wire/passive operation; defeatable balance and tane-monitor circuits FR 20-20,000 Hz ±0.1 dB; THD 0.1%; S/N 100 dB. 17 x 21/2 x 9 in; 14 lb. \$605

PSE

Studio SL Preamplifier 6 inputs; MM/MC input; balanced-XLR and

RCA main outputs. Features discrete FET Class A design: separate phono and line power supplies; metal-film resistors; auto mute. Balance control. Rack mount optional. FR 30-16,000 Hz ±0.25 dB phono, 1-60,000 Hz ±0.25% line; slew rate 50 V/us, 5-vr warranty, 18 x 134 x 856\$950 (\$850 without phono stage)



PS Audio Reference Link LS

QUAD The following feature a tilt control that adjusts FR slope in seven 1-dB steps.

Ouad 66 Preamplifier inputs. High-frequency filter with 7.000- or

5,000-Hz rolloff; bass control with rolloffs at 50 and 200 Hz; remote control. FR 30-20,000 Hz ±0.5 dB phono, 15-20,000 Hz ±0.2 dB line; THD 0.05%; S/N 75 dB, 12¼ x 3¼ x 10 in\$1,599

Quad 34 Preamplifier 4 inputs, 3 pushbutton filters; bass control....\$749

QUICKSILVER

Quicksilver Tube Preamplifier Output imp 12.5 ohms; bandwidth 1-650,000 Hz; THD 0.001%... \$1.005

ROTEL

RC990BX Preamplifier

8 inputs; MM/MC phono input; headphone jack. Features discrete line stage; high-freque cy passive and low-frequency active EQs; CD- direct mode. Independent record and listen selectors; balance control: remote control. FR 20-20.000 Hz; THD 0.004%; S/N 120 dB line. 17% x 2% x 12% in...

RTC950AX Preamplifier/Tuner

6 inputs; MM/MC phono input. FR 20-20,000 Hz; THD 0.004%; S/N 100 dB. 17 x 3½ x 13½ RTC940AX. As above, no phono stage\$450

RSP960AX A/V Preamplifier 6 audio and 2 video inputs; variable output for active and passive subwoofers. Features Dolby

urround processor. THD 0.004%; S/N 100 dB 17% x 3½ x 11½ in.

RC960BX Preamplifier 8 inputs; MM/MC phono input; headphone

jack. Features direct signal paths. Defeatable tone controls; bass and treble controls; tone-defeat and mono switches. FR 40-20,000 Hz ±0.2 dB phono, 4-100,000 Hz -3 dB line; THD 0.004%; S/N 80 dB MM, 70 dB MC, 100 dB line. 1736 x 236 x 1134 in; 7 lb.....

JEFF ROWLAND

Consummate Preamplifier 3 balanced and 3 unbalanced inputs: balanced

and unbalanced outputs. Features Class A FET design; separate power supply with dual toroidal transformers; AC power-line filter. Microprocessor-controlled volume and switching: selectable gain: remote control. FR 0.05-160,000 Hz ±3 dB; THD 0.008%. 15 x 5½ x 131/4 in: 28 lb ... \$5,050 Consummate Phono Stage, For above, Balanced and unbalanced inputs and outputs; select table gain. FR 0.15-250,000 Hz +3 dB; THD 0.02%; S/N 80 dB. 15 x 2½ x 13½ in.....\$2,800

Consonance Preamplifier I phono and 5 unbalanced inputs; balanced and unbalanced outputs. Features microprocessorcontrolled volume and switching. Selectable

line gain; remote control. FR 0.15-220,000 Hz +3 dB phono, 0.08-200,000 Hz +3 dB line; THD 0.04% phono, 0.012% line. 15 x 25/4 x 13% in: 14 lb.

SONOGRAPHE

SC22 Preamplifier 6 line-level inputs. Features FET design with

polypropylene and polystyrene capacitors for all audio circuits; discrete power-supply regulation. FR 5-100,000 Hz ±0.5 dB: THD 0.1%, 17 1214 x 216 in ... SC22P. Phono stage for above. Features discrete FET regulated power supply\$189

SONY

TA-E2000ESD Digital A/V Preamplifier 5 audio inputs including phono; 7 A/V inputs including 3 S-video inputs, 3 VCR loops, and front-panel S-video input; I coaxial and 2 fiberoptic digital inputs: fiber-optic digital output: 2 subwoofer and 2 center-channel outputs; 4 AC outlets, 3 switched, 1 unswitched. Features DSP with pulse A/D conversion, 1-bit D/A conver sion, and auto sample-rate switching; source-direct switch. Dolby Pro Logic decoder; 10 facto ry and 10 user sound-field presets: 10 adjustable sound-field parameters; 3-band digital parametric EQ; independent EQ's for front, center, and rear channels; digital dynamic-range compres sion/expansion; record-out selector; programmable A/V remote control. FR 20-20.000 Hz ±0.2 dB phono, 10-20,000 Hz ±0.1 dB line; THD 0.004% at 1,000 Hz. Simulated-wood side panels. 18½ x 6 x 14¼ in; 19 lb.....\$1,250

7 audio inputs including MM/MC phono; balanced-XLR analog inputs and outputs; signalprocessor loop. Features dual-mono design; source-direct mode. Selectable phone load imp; record-out selector; remote control. FR 20-20,000 Hz ±0.2 dB phono, 3-300,000 Hz +0, -3 dB line; S/N 83 dB MC, 95 dB MM, 105 dB line; THD 0.001%. Simulated-wood side panels. 151/2 x 51/4 x 141/2 in; 29 lb

SOUNDSTREAM C-2 THX A/V Preamplifier

6 A/V inputs; 2 S-video inputs. Features THX certification. 4 soundtrack processing modes; 6 music processing modes; 2-zone multiplesource capability...

SUMIKO Copland CTA-301 Tube Preamplifier

Tape loop; line-level input; MM phono inpu Features all-tube circuitry, FR 5-100,000 Hz -1 dB; THD 0.01%; S/N 86 dB

SUMO Diana Preamplifier

6 inputs; balanced XLR inputs and outputs. Features 2-chassis design with two 40-VA transformers and 4 regulation stages: DC-coupled design; 1% metal-film resistors. FR 20-20.000 Hz ±0.1 dB: S/N 100 dB\$1.399

Athena II Preamplifier

Gold-plated balanced inputs. Features fully complementary Class A discrete line stage; 1% metal-film resistors; polystyrene bypass capacitors; separate power supply for each channel. Separate listen and record selectors; lasertrimmed volume potentiometer; CD-direct mode; tape-monitor control. Balanced outputs. phono stage optional, FR 0.2-300,000 Hz +0, -3

SUPERPHON

SP-100 Preamplifier

6 inputs including one tape loop; gold RCA connectors. Features line-stage buffer circuit with no active gain in signal path; Teflon-insulated solid-core wire. Source-select, balance, volume, mute. and tape-loop controls. FR 0.5-200,000 Hz; S/N 90 dB. 17 x 3 x 91/4 in; 12 lb......\$300

THRESHOLD

T2 Preamplifier 2 balanced and 6 unbalanced inputs; 2 balanced, 2 unbalanced, and 2 processor outputs. Features 10-bit A/D converter controlling volume; 4 separate gain paths; microprocessor-controlled source-select relays: separate analog and digital regulation; short-path circuit execution; external power supply with 150-W toroidal transformer; separate line regulation. Balance controls; standby mode; fluorescent display; remote con trol. FR 0-200,000 Hz -1 dB; THD 0.01%; S/N 118 dB. Main unit: 14 x 3½ x 17½ in: 14 lb. Power supply: 12 x 4 x 81/4 in; 11 lb\$5,250 T3. As above, without microprocessor, outboard power supply, fluorescent display, or remote control \$2.250

AHAMAY

CX-1 Preampiffer

8 audio inputs: MMMC phono input; gold-plate
ed input; remote link for MX-1 or MX-2 amplifler; headphone jacks. Features capacitive negative-feedback amplifier circuity; source-direct
mode; motor-driven input selector and volume
control. Record-out selector; center-defeat tone
controls; switchable subsonic phono filter; remote control. THD 0.002%; SN 110 dB, 174 x
37 x 16 in; 19 S. 1, 199

CX-2 A/V Preamplifier 8 audio and 3 video inputs; MM/MC phono in-

8 audio and 3 video injusts, instruct, proint input; S-video connectors; gold-plated headphone jack; remote link for MX-1 or MX-2 amplifiers. Features motor-driven input selector and volume control; outree-direct mode. Record-outselector; variable loudness control; center-defeat tone controls; switchable subsonic phono filter; programmable remote control. 179 x 39/s x 129/s in; 21 S 3799

CX-630 A/V Preamplifier

6 audio and 2 video gold-plated inputs; 4 audio and 2 video outputs; 2 AC outlets. Features source-direct mode. Record-out selector; 2-VCR simultaneous-record capability; variable loudness control; switchable subsonic filter. center-defeat bass and treble controls; remote control. II ib

INTEGRATED

AMPLIFIERS

ACURUS

DIA-100 100-W/ch Integrated Amplifier 2 channels. 100 Wx 2 into 8 ohms or 150 x 2 into 4 ohms. 6 inputs. Features direct input design with single gain stage. Volume, balance, and program-source switching controls. 17 x 3½ x 8 in.

AMC

CYT 340-30-Wich Tube Integrated Amp 2 channels, 30 W x 2 from 50-3000 Hz with 16: THD. I phono and 6 line-level inputs; tape loop; gold-plated speaker terminals. Features two EL34 vacuum tubes per channel; Class A design, seven 240-V MOSFET devices per channel; fixed-bias output tubes; no relay or switch contacts between output transformer and speaker terminals. Defeatable tone controls. SfN 80 dBA at 1 W.

ARCAM

Delta 290 75-W/ch Integrated Amplifier 2 channels. 75 W x 2 into 8 ohms, MC/MM phono inputs; 2 tape loops. FR 5-20,000 Hz; THD 0.02% at 1,000 Hz. 17 x 3½ x 11½ in; 14 lb. \$500.

Alpha 6 50-W/ch Integrated Amplifier 2 channels, 50 W x 2 into 8 ohms. MM/MC phono inputs; tape loop. FR 20-20.000 Hz; THD 0.01% at 1,000 Hz. 17 x 3 x 10 in; 10 lb.....\$649 Alpha 5. As above, 40 W x 2 into 8 ohms.\$449

AUDIO INNOVATIONS Series 300 MkH 10-W/ch Tube Integrated Amplifier

2 channels. 10 W x 2 cont avg into 8 ohms.

-

CAMBRIDGE AUDIO P70 60-W/ch Integrated Amplifier

2 channels, 60 W x 2 into \$ ohms. 5 inputs: 5-way blinding posts. Features toroidal transformers with nurel nervice cagacities. Defeatable tone with nurel nervice cagacities. Defeatable tone 150 miles of the control of the control

CARVER

CMV-118S 320-W AV Integrated Amplifler Schamale, Dobly Pto Logic, 80 W x 2 (front) + 90 x 1 (center) + 90 x 1 (center) + 95 x 1 (center) into 8 ohms from 202-20,000 Hz with 0.18° THD. 2 adio inputs; 3 composite-video inputs; 2 composite-video inputs; 3 composite-video inputs; 4 composite-video inputs; 5 composite-video inputs; 5

CM-1090 100-W/ch Integrated Amplifier

2 channels, 100 W x 2 time 8 ohms or 140 x 2.

THD. CD-direct input: 7 audio inputs: MM phono input: 2 tipe loops with dubbing capability and the continuation of the

CREEK

DENON

AVC.389 400-W AV. Integrated Amplifier
Schamelis. Dolby Po. Logic, ESP 110 W s 3
(left, right, center) = \$5 × 2 (rear, all line 8
(left, right, center) = \$5 × 2 (rear, all line 8
(left, right, center) = \$5 × 3 (rear, all line 8
(left, right, center) = \$5 × 3 (rear, all line 8
(left, right, center) = \$5 × 3 (rear, all line 8
(left, right, right

PMA-1080R 105-W/ch Integrated Amplifier 2 channels. 105 W x 2 into 8 ohms from 20-20,000 Hz. Line-level outputs. Features optically by counseld Class A circuity complementary

20,000 Hz. Line-level outputs. Features opticalply coupled Class A circuitry: complementary topology; toroidal transformer. Record-out selector; last-function memory; Denon IS remotecontrol compatibility; remote control. THD 0.005%; S/N 94 dB MM, 76 dB MC, 110 dB line. S675. PMA-880R. As above, 75 W x 2 into 8 ohms. THD 0.02% S00 PMA-680R. As PMA-1080R. 65 W x 2 into 8 ohms. Without optically coupled Class A circuitry. Features discrete circuitry. THD 0.05% SN 94 dB MM. 75 dB MC, 107 dB line ...\$400



HARMAN KARDON HK6950R 170-W/ch Integrated Amplifier

2 channels, 170 W x 2 into 4/8 ohms from 20-20,000 Hz with 0.08% THD, MM/MC phono inputs; 5 line-level inputs; 2 tape loops; preout/main-in loops; headphone jack. Features toroidal transformer; subsonic filter. Phase-correct loudness and tone-defeat switches; recordout selector: remote control. FR 0.2-20,000 Hz +0, -3 dB at 1 W; S/N 80 dB MM, 76 dB MC, 98 dB line; slew rate 280 V/µs; damping factor 65. 17% x 6¼ x 15¼ in; 40 lb.... \$1.299 HK6650R, As above, 100 W x 2, Without tonedefeat switch. Features mono switch. FR 0.5-200,000 Hz +0, -3 dB; slew rate 180 V/µs. 171/2 x 5\% x 14\% in; 25 lb.... HK6350R. As above, 60 W x 2. Without record-out selector or pre-out/main-in loops Features signal-processor loop. Slew rate 140 V/µs; damping factor 60. 17% x 4% x 14½ in; 18 lb.

HK6250 45-W/ch Integrated Amplifier

2 channels, 45 W x 2 linto 4/8 oftens from 20, 20,000 Hz with 0.9% THD. 6 inputs including 2 tape loops; headphone; jeck, Phase-correct doubness switch, stone and balance controls; remote control. FR 0.3-150,000 Hz +0, -3 dls. 5/N 80 dB phono, 9 dB line; sieve rate 90 V/grz, damping factor 60, 179 x 4/9 x 14/5; girt HK615B, As above, 30 W x 2 lim 0.48 oftens from 20-20,000 Hz with 0.09% THD. SN 78 dB phono. 14 bit 50, 5279

J V C AX-Z911BK 100-W/ch

Digital Integrated Ampiller

2 channels; 100 W x² cost avg into 8 ohms
with 0.0005% THID. Fiber-optic and coaxial
digital inputs; writchable digital (caxial
digital inputs) writchable digital caxial
input output; gold-planed terraminal; MM/MC

LOSA A sonic characteristics and Class A conic characteristics and C

KENWOOD

KA-V7700 200-W A/V Integrated Amplifier 5 channels, digital Dolby Pro Logic, DSP, 50 W

x 3 (front, center) + 25 x 2 (rear) or 60 x 2 rms into 8 ohms from 20-20,000 Hz with 0.06% THD. 4 S-video inputs; 2 S-video outputs. center-channel speaker outputs. Adjustable DSP parameters with 8-preset memory: 3 cinemascreen modes; 20 AM/FM presets; record-out selector; on-screen displays; programmable remote control...

LINN

Majik-I 33-W/ch Integrated Amplifier

2 channels. 33 W x 2 into 8 ohms or 66 x 2 into 4 ohms. 5 line-level inputs; phono input; preout/main-in loops: headphone jack. Features microprocessor-controlled electronic switching. Active-crossover module, add-on tuner, or multiroom module optional. 11 lb... \$1.095 Above with line-level input in place of phono input...

Intek 50-W/ch Integrated Amplifier 2 channels, 50 W x 2 into 8 ohms, MM and MC phono inputs; switched/unswitched speaker outputs; headphone jack. Separate record/play

paths ... MARANTZ

PM-700AV 200-W A/V Integrated Amplifier 5 channels, Dolby Pro Logic, 50 W x 2 (front) + 50 x 1 at 1,000 Hz (center) + 25 x 2 (rear), all

rms into 8 ohms. 4 audio inputs; front-panel A/V input; 4 A/V inputs including 2 S-video; composite and S-video outputs; switchable bass boost; preprogrammed remote control. S/N 76 dB phono, 85 dB line, Gold finish with matching side panels. 17% x 6 x 13% in; 29 lb\$699

McINTOSH C-40 20-W/ch Integrated Amplifier

2 channels. 20 W x 2 cont avg into 8 ohms. Balanced input and output; 2 processor loops, switched AC outlets. Features anticlipping circuitry; logic-driven electromagnetic switching; dynamic-range compressor/expander. Separate listen and record selectors; 5-band EQ; variable loudness control; monitor amp switchable between listen/record circuits and inputs; mut switch. FR 20-20,000 Hz +0, -0.5 dB; THD 0.002%: S/N 100 dBA, 171/2 x 51/4 x 151/2 in: \$3,000 23 lb.

MISSION

Cyrus II 60-W/ch Integrated Amplifier 2 channels, 60 W x 2 into 8 ohms, 6 inputs including MM/MC phono; headphone jack. Features polypropylene and polystyrene capacitors Record-out selector; balance control. FR 20-20,000 Hz; THD 0.003% at 1,000 Hz; S/N 83 dB; slew rate 10 V/µs; damping factor 100. 81/2

Cyrus I 30-W/ch Integrated Amplifier 2 channels, 30 W x 2 into 8 ohms, 6 inputs including MM/MC phono. Features die-cast magnesium chassis and heat sink; die-cast aluminum front and cover; metal-film resistors and capacitors. Record-out selector; balance control....\$649

MITSUBISHI

x 3 x 131/2 in; 16 lb.

HTS-100 200-W A/V Integrated Amplifier 4 channels, Dolby Pro Logic. 50 W x 3 (front, center) + 25 x 2 (rear), all rms into 8 ohms with 1% THD, Subwoofer output, Balance control: center- and rear-channel level controls: test-tone generator; programmable remote control\$599

NAD

Model 304 35-W/ch Integrated Amplifier 2 channels, 35 W x 2 cont avg into 8 ohms with 0.03% THD. Two sets of 5-way binding posts; gold-plated phono and CD inputs; preout/main-in loops. Features discrete 4-tran phono preamp. S/N 77 dB MM, 91 dB line: damping factor 100 at 50 Hz; dynamic headroom 5.5 dB. 161/2 x 45/4 x 147/4 in; 19 lb....\$379



NAD Model 304

Model 302 25-W/ch Integrated Amplifier 2 channels. 25 W x 2 cont avg into 8 ohms from

20-20,000 Hz with 0.03% THD, 5-way binding posts; gold-plated phono input; pre-out/main-in loops. Features discrete 4-transistor phono preamp. S/N 77 dB MM, 90 dB line; damping factor 60 at 50 Hz; dynamic headroom 6 dB. 161/2 x 41/4 x 121/4 in ... \$269

MAIM

\$1,095

NAIT 3 30-W/ch Integrated Amplifier 2 channels. 30 W x 2 into 8 ohms. 5 line-level inputs. Features electronic switching, MM/MC phono input optional. 171/4 x 21/4 x 12 in ...\$1,055

ONKYO Integra A-SV810PRO 325-W A/V Integrated Amplifier

5 channels, Dolby Pro Logic, DSP, 85 W x 3 (front, center) + 35 x 2 (rear) into 8 ohms or 180 x 2 max into 3 ohms. 6 video inputs including 5 S-video inputs: 10 audio inputs: 5 video outputs including 3 S-video outputs; 5 audio outputs; line-level subwoofer output. Features 8-mode digital sound-field processor; motor-driven volume control. 10 sound-field presets; adjustable digital delay: record-out selector; mute switch; on-screen displays; remote control. Bandwidth 20-20,000 Hz; THD 0.06%; S/N 105 dB; dam ing factor 90, 18 x 6% x 16% in: 39 lb.....\$1,100

Integra A-809 105-W/ch Integrated Amp 2 channels, 105 W x 2 rms into 8 ohms or 303 x 2 max into 2 ohms. 5-way binding posts. Features discrete outputs, power supplies, and trans formers; direct signal paths; dual-shielded-block construction with 2-panel chassis base; motordriven volume control; remote control. Bandwidth 20-20,000 Hz; THD 0.008%; S/N 107 dB. 18 x 61/4 x 161/4 in; 37 lb \$660 Integra A-807, As above, 80 W x 2 rms into 8 ohms or 210 x 2 max into 2 ohms. 34 lb....\$550

Integra A-SV610PRO 250-W A/V Integrated Amplifier

5 channels, Dolby Pro Logic. 70 W x 3 (front, center) + 20 x 2 (rear) into 8 ohms, or 125 x 2 into 8 ohms, or 240 x 2 into 4 ohms, 8 audio and 3 video inputs. Dual power transformers. Video dubbing capability; record-out selector; tone control; fluorescent display; Onkyo RI-sys

tem compatibility: remote control. Bandwidth 20-30,000 Hz; THD 0.08%; S/N 100 dB; dam ing factor 60. 18 x 63/4 x 151/4 in; 30 lb.,

A-RV401 100-W/ch A/V Integrated Amp

2 channels, 100 W x 2 rms into 8 ohms or 190 x 2 into 4 ohms, 7 audio and 2 video inputs. Features discrete outputs; motor-driven volume control; source-direct mode. Video dubbing capability; loudness control; simulated-stereo mode; fluorescent display; Onkyo RI-system compatibility; remote control. Bandwidth 20-20.000 Hz; THD 0.08%; S/N 102 dB; damping factor 40, 18 x 51/2 x 13 in: 22.2 lb.

A-803 60-W/ch Integrated Amplifier 2 channels, 60 W x 2 rms into 8 chms or 135 x 2 max into 2 chms, 7 audio inputs including MM/MC; 5-way binding posts. Features sourcedirect mode; multiroom capability; remote control. 18 x 4¼ x 13 in..

PHILIPS FA-950 100-W/ch Integrated Amplifier

2 channels. 100 W x 2 into 8 ohms or 140 x 2 into 4 ohms. 7 inputs including MC and MM phono; digital inputs/outputs. Bus system for integration with 900 series components; remote control...

PIONEER VSA-7500 254-W A/V Integrated Amplifier

5 channels, Dolby Pro Logic, DSP, 70 W x 3 (front, center) + 22 x 2 (rear) into 8 ohms at 1,000 Hz with 0.3% THD or 75 x 2 cont ave into 8 ohms from 20-20,000 Hz with 0.008% THD. 6 audio and 6 video inputs; S-video connectors: front-panel A/V input: line-level outputs for each channel; 2 center-channel speaker outputs; subwoofer output. Features source-direct mode. Simulated-surround, disco, church, hall, jazz, and theater sound fields; adjustable digital delay: Dolby 3 Stereo mode: variable bass synthesizer; video signal and record selectors; last-function memory; on-screen displays; ogrammable SR-system A/V remote control. FR 20-20,000 Hz ±0.3 dB phono, 5-100,000 Hz +0, -3 dB line; S/N 72 dB phono, 96 dB line. 16% x 6% x 16% in; 27 lb..

Elite A-71 120-W/ch Integrated Amplifier 2 channels. 120 W x 2 into 8 ohms from 20-20,000 Hz with 0.003% THD. 7 inputs including MM/MC phono; headphone jack. Features direct signal paths; isolation of transformer and heat sink from chassis: source-direct mode. Switchable phono subsonic filter; record-out selector; tone and balance controls; A/B speaker switching, S/N 95 dB MM, 77 dB MC, 110 dB line. 18 x 67/4 x 185/4 in; 60 lb...

Elite A-51 100-W/ch Integrated Amplifier 2 channels, 100 W x 2 into 8 ohms from 20-20,000 Hz with 0,007% THD, 8 inputs including gold-plated phono and CD inputs. Features direct signal paths. Muting; loudness contour; record-out selector; source-direct switch; A/B speaker switching, S/N 94 dB MM, 76 dB MC,

110 dB line 16% x 6% x 17% in: 42 lb \$850 A-301 40-W/ch Integrated Amplifier 2 channels. 40 W x 2 into 8 ohms from 20-

20,000 Hz with 0.01% THD, 50 x 2 into 4 ohms from 20-20,000 Hz with 0.02% THD, or 100 x 2 into 2 ohms. 6 inputs including phono; outputs for 2 speaker pairs. Features channel-separation enhancement circuit; source-direct mode;

direct signal paths. Record-out selector; tape-

ROTEL

RA980BX 100-W/ch Integrated Amplifier 2 channels. 100 W x 2 cont avg into 8 ohms from 20-20,000 Hz with 0.03% THD. 7 inputs including MC and MM; headphone jack. Fea-tures electrolytic filter capacitors. Tone controls: mono switch, S/N 70 dB MC, 80 dB MM, 100 dB line; damping factor 1,500. 17% x 4% x 13% in: 24 lb RA960BX. As above, 60 W x 2 cont avg into 8

ohms from 20-20,000 with 0.03% THD. Without mono switch. Damping factor 100\$500 RA930AX. As above, 30 W x 2 cont avg into 8

SANSUI AU-X911DG 100-W/ch

Digital Integrated Amplifier

2 channels. 100 W x 2 cont avg into 8 ohms from 10-20,000 Hz with 0.005% THD. 5 goldplated analog inputs; 4 gold-plated digital inputs. Features 1-bit D/A converter, discrete L/R amplifiers; separate digital and analog transformers; subsonic filter; digital- and source-direct modes. Record-out selector: loudness switch; A/B speaker switching. 17 x 6½ x 17¾ in: 40 lb

AV-7000 280-W A/V Integrated Amplifier 5 channels, Dolby Pro Logic, DSP. 70 W x 3 rms (front center) + 35 x 2 (rear), all into 8 ohms from 20-20,000 Hz with 0.02% THD. Front, rear, and center line-level outputs; tapemonitor loop; 5 audio and 4 video inputs; frontpanel video input: video-processor loon. Features 8 surround/DSP modes including 6 with variable digital delay; surround memory for rear- and center-channel volume, tone, and digital-delay settings; remote control. S/N 110 dBA, 17 x 6½ x 17½ in: 32 lb ...

AU-X517R 65-W/ch Integrated Amplifier channels. 65 W x 2 rms into 8 ohms from 20-20,000 Hz with 0.015% THD, 4 speaker outputs. Features servo-driven source-selector: subsonic filter; source-direct mode. 4-mode loudness/bass-boost control; record-out selector; remote control. S/N 70 dB MC, 88 dB MM, 105 dB line. 17 x 51/4 x 13 in; 20 lb......\$579 AU-X417R, As above, 55 W x 2 rms into 8 ohms from 20-20,000 Hz with 0.05% THD. Without bass boost, Single-mode loudness; motor-driven volume control: muting, S/N 65 dB MC, 80 dB MM...

AU-X117 30-W/ch Integrated Amplifier 2 channels, 30 W x 2 rms into 8 ohms, 4 speaker outputs; gold-plated headphone jack. CD-di-rect switch. S/N 78 dB phono, 105 dB line. 17 x 5 x 1134 in; 11 lb ..

SONY

The following models feature a Class A MOS-FET voltage stage and a MOSFET output stage.

TA-F808ES 100-W/ch Integrated Amplific 2 channels, 100 W x 2 into 8 ohms from 20-20,000 Hz with 0.004% THD or 130 x 2 into 4 ohms, 7 inputs: MM/MC phono input: line-level outputs. FR 2-200,000 Hz +0. -3 dB line: S/N 93 dB MM, 79 dB MC, 105 dB line; damping factor 100 into 8 ohms. 181/2 x 67/4 x 171/4 in\$1,700 TA-F707ES 90-W/ch Integrated Amplifier 2 channels. 90 W x 2 into 8 ohms from 20-20,000 Hz with 0,004% THD or 120 x 2 into 4 ohms. 7 inputs; MM/MC phono input; line-level outputs. FR 2-200,000 Hz +0, -3 dB line; S/N 93 dB MM, 77 dB MC, 105 dB line; damping factor 100 into 8 ohms. 18½ x 6½ x 17½ in\$1,200 TA-F606ES, As above, 80 W x 2 into 8 ohms with 0.008% THD, or 100 x 2 into 4 ohms. No line-level outputs, 17 x 5% x 14% in

CTA-401 45-W/ch Tube Integrated Amp 2 channels. 45 W x 2 cont avg into 8 ohms. S/N 90 dB; slew rate 70 V/µs. 59 lb \$2,500

TEAC

A-X5000 75-W/ch Integrated Amplifier 2 channels. 75 W x 2 cont avg into 8 ohms MM/MC phono input; 6 line-level inputs; outputs for 2 speaker pairs. Source-direct mode; independent input and record selectors; mute button; switchable subsonic filter; loudness switch; tone and balance controls. FR 20-20,000 Hz; THD 0.009%; S/N 80 dB phono, 101 dB line. 17% x 6% x 14% in: 23 lb...

A-X3000 60-W/ch Integrated Amplifier 2 channels, 60 W x 2 cont ave into 8 ohms Phono input; 5 line-level inputs; outputs for 2 speaker pairs. Features source-direct mode. Independent input and record selectors; mute button; subsonic filter; loudness switch; tone and balance controls. FR 20-20.000 Hz: THD

0.02%; S/N 78 dB phono, 101 dB line. 1736 x 5 x 141/6 in; 20 lb. A-X1000 40-W/ch Integrated Amplifier 2 channels, 40 W x 2 cont ave into 8 ohms Phono input; 5 line-level inputs; outputs for 2 speaker pairs. Features source-direct mode. Independent input and record selectors; loudness switch; tone and balance controls. FR 20-20,000 Hz: THD 0,02%; S/N 78 dB phono, 101

dB line. 171/4 x 5 x 141/6 in; 17 lb.



Yamaha DSP-A970

TECHNICS SU-V660 90-W/ch Integrated Amplifier

2 channels. 90 W x 2 cont avg into 8 ohms with 0.007% THD. Switchable MC/MM phono inputs; pre-out/main-in loops; outputs for 2 speaker pairs. Features Class AA circuitry. Defeatable tone and loudness controls. FR 30-15,000 Hz ±0.8 dB phono, 20-20,000 Hz +0, -0.2 dB line; S/N 72 dB MC, 76 dB MM, 80 dB line; damping factor 80.

SU-V460 50-W/ch Integrated Amplifier 2 channels. 50 W x 2 cont avg into 8 ohms with 0.007% THD. Pre-out/main-in loops; outputs for 2 speaker pairs. Features Class AA circuitry Defeatable tone and loudness controls. FR 30-

15,000 Hz ±0.8 dB phono, 20-20,000 Hz +0, -0.2 dB line; S/N 76 dB MM, 81 dB line; damping factor 60.

YAMAHA DSP-A2070 340-W A/V Integrated Amplifier 7 channels, digital Dolby Pro Logic, DSP. 80 W x 3 (left, center, right) into 8 ohms + 25 x 4 (effects). 5 audio and 6 A/V inputs; S-video terminals: front-panel S-video A/V inputs; videomonitor output; pre-out/main-in loops for L/R front effects, center channel, and L/R rear effects: center-channel outputs for 2 speakers: subwoofer output. Features 19-bit A/D converters: 18-bit D/A converters, 11 DSP cinema modes and 12 DSP music modes; parameter controls including effect trim, front-effect presence, rear-effect surround delay time, and reverberation; variable subwoofer test-tone generator; parameter-reset button: 7-dB bass boost at 70 Hz; digital test-tone generator; 5-band centerchannel graphic EO: record-out selector; on screen displays; remote control. 46 lb\$1,999

DSP-A970 283-W A/V Integrated Amplifier 7 channels, Dolby Pro Logic, DSP. 65 W x 3 (left, right, center) into 8 ohms from 20-20,000 Hz with 0.015% THD + 22 x 4 (effects) with 0.03% THD, 5 audio and 5 A/V inputs; S-video terminals: front-panel S-video A/V input: center-channel outputs for 2 speakers; line-level outputs for 4 effects channels; subwoofer output; 3-way binding posts. Features 18-bit A/D converters, 35-mm theater-surround and 70-mg movie-theater DSP modes: 11 cinema DSP modes including game-amusement, karaoke, fantasy, and classic film; parameter controls with reset button; 5-band center-channel graphic EO; input level control; record-out selector; digital test-tone generator; front, center, and rear level controls; on-screen displays; pro-

DSP-E1000 180-W A/V Integrated Amplifier 5 channels, Dolby Pro Logic, DSP. Designed as add-on to existing 2-channel stereo. 25 W x 4 rms into 8 ohms (L/R front and rear effects) + 80 x 1 (center). Tape loop; video inputs and outputs; S-video terminals; subwoofer output with 200-Hz low-pass filter; line-level outputs for all channels; 5-way binding posts. Features V-theater and concert video modes: 35-mm and 70-mm theater modes; 23 DSP modes; auto input balance; 5-band center-channel EQ; wide and phantom center-channel modes; frontrear-, and center-channel level controls; front/ rear bass boost; audio muting; on-screen superimpose: remote control, 17% x 5% x 15% in:

grammable remote control, 31 lb ...

AX-570 100-W/ch Integrated Amplifier 2 channels, 100 W x 2 rms into 8 ohms from

20-20.000 Hz with 0.015% THD or 290 x 2 into 2 ohms. 6 audio inputs with 2 tape loops; MM/MC input; pre-out/main-in loops; 3-way binding posts; 3 switched AC outlets. Variable loudness control; record-out selector; switchable subsonic filter: Yamaha IS-system remote control. 171/4 x 53/4 x 151/6 in: 24 lb

AX-470 65-W/ch Integrated Amplifier 2 channels. 65 W x 2 rms into 8 ohms from 20-

20,000 Hz with 0.015% THD or 160 x 2 into 2 ohms, 6 audio inputs with 2 tape loops; 3 switched AC outlets. Motor-driven input selector and volume control. Record-out selector; variable loudness control; Yamaha IS-system remote control. 171/4 x 51/4 x 151/4 in....

ADCOM

GCD-600 5-Disc CD Changer

4x oversampling, dual 16-bit D/A converters, five-disc carousel. Features dual-transformer power supply; Class A analog output circuitry. Selectable digital-domain phase inversion; remote control. S/N 105 dB. 17 x 41/2 x 151/2 in; 13 lb...

AIWA

DX-NR370M 3-Disc CD Changer

Dual 1-bit D/A converters, 3-disc front-loading carousel. Fiber-optic digital output. Tape edit ability to change 2 discs while 3rd plays; direct track/disc access; 20-track programming; 2 random-play modes; 4 repeat modes; 20-track music calendar; fluorescent display; remote control. FR 10-20,000 Hz ±2 dB; S/N 90 dB; THD 0.01%, dynamic range 92 dB, and ch sep 85 dB at 1,000 Hz. 101/4 x 31/4 x 121/2 in; 8 lb\$350

AMC CD6 CD Player

1-bit D/A converter. Interpolating digital filter; 4-nole Butterworth filter, Fiber-optic and coaxial digital outputs. FR 10-20,000 Hz ±0.1 dB; THD 0.004% at 1.000 Hz; S/N 96 dBA; ch ser 90 dR

ARCAM Delta 270 CD Player

Dual 16-bit D/A converters. Remote control. FR 10-10,000 Hz ±0.1 dB; THD 0.005% at 1.000 Hz; S/N 103 dB; dynamic range 96 dB; ch sep 90 dB at 1,000 Hz. 17 x 31/2 x 11 in\$1,600

Alpha 5 CD Player

Dual 16-bit D/A converters. Remote control. FR 10-10,000 Hz ±0.1 dB; THD 0.007% at 1,000 Hz; S/N 105 dB; dynamic range 96 dB; ch sep 90 dB at 1.000 Hz, 17 x 3 x 10 in\$899

AUDIOSOURCE

CDCeiver 6-Disc CD Changer/Receiver 4x oversampling, 6-disc magazine. Combines AM/FM receiver and CD changer. Video in-

puts; tape and processor loops; 2 sets of speaker outputs: headphone iack: AC outlet, 32-track programming per magazine; program memory for up to 10 magazines; random play; 8 AM/18 FM presets with scan; remote control. 30 W x 2 into 8 ohms from 20-20,000 Hz with 0.4% THD, CD: FR 20-20,000 Hz ±0.5 dB: S/N -98 dB. FM: cap ratio 1.75 dB; S/N 76 dBA mono; ch sep 45 dB, 17 x 43/4 x 14 in.

BANG & OLUFSEN Beogram CD 7000 CD Player

4x oversampling, dual 16-bit D/A converters. Integrates with Beosystem 7000. Front-loading drawer; track search; direct track access; tracktime, elapsed-time, remaining-time, and trackindex displays. FR 3-20,000 Hz ±0,3 dB; S/N 110 dBA: ch sep 101 dB. Polished-aluminum or white finish. 161/2 x 3 x 123/4 in; 18 lb\$1,250

Beogram CD 4500 CD Player 4x oversampling, dual 16-bit D/A converters.

Integrates with Beosystem 4500, Features toploading mechanism; digital Bessel filter; elliptical analog filter. Track search; direct track ac-cess. FR 3-20,000 Hz ±0.3 dB; S/N 110 dBA; ch sep 101 dB. Polished-aluminum finish with

CALIFORNIA AUDIO LABS The following feature a digital servo transs a discrete FET analog stage, and a coaxial dig-

ital output. Tercet MkIV CD Player

8x oversampling, 20-bit hand-trimmed D/A converters. Features custom output clock. Coax-

ial digital input. Remote control. FR 10-20,000 Hz ±0.05 dB; THD 0.002%; S/N 103 dB; dynamic range 106 dB; ch sep 94 dB.....\$1,495

Icon MkII CD Player 8x oversampling, 18-bit hand-trimmed D/A converters. Features custom output clock. Re-

mote control. FR 10-20,000 Hz +0, -0.2 dB; dynamic range 105 dB; S/N 103 dB; THD 0.002%; ch sep 91 dB.

DX-1 CD Player Delta-sigma D/A conversion. Remote control.

FR 5-20,000 Hz ±0.2 dB; THD 0.007%; S/N 91 dB; dynamic range 90 dB; ch sep 86 dB\$495

CAMBRIDGE AUDIO

CD3 CD Player 16x oversampling, eight 16-bit D/A converters, Features suspended die-cast aluminum chassis and transport mechanism; toroidal transformer: discrete power supplies for digital and analog stages; no analog filtering stage. Fiber-optic digital output. 20-track programming; 3-speed search: track/index search: remote control. THD 0.0025% at 1,000 Hz; S/N 100 dB; dynamic range 96 dB; ch sep 100 dB ... \$1.700

CARRERA CD-3400R 6-Disc CD Changer

Arcam Alpha 5

4x oversampling, dual 16-bit D/A converters, 6-

disc magazine. Headphone jack. Track/disc elapsed-time displays; 32-track programming; 3 repeat modes. FR 20-20,000 Hz ±0.5 dB; THD 0.009%; S/N 96 dB. 13 lb...

CD-3300R CD Player Dual 16-bit D/A converters. Direct track access:

random play; music calendar; remote control. FR 20-20,000 Hz; THD 0.0004%; S/N 100 dB. 17 x 31/4 x 12 in; 10 lb ...

CARVER SD/A-370 10-Disc CD Changer

1-bit D/A converter, 10-disc magazine. Headphone jack with volume control. Tape edit; 32track programming; intro scan; all-disc random play; track/disc skip, scan, and repeat; music calendar; fluorescent display; remote control. FR 5-20,000 Hz ±0.5 dB: THD 0,005%; S/N \$700 100 dBA. 19 x 45/4 x 143/4 in..

SD/A-490t Tube CD Player

1-bit D/A converter. Features two vacuum tubes in output stage; auto 30-second standby mode for tube preheat; motor-driven volume control Fiber-optic and coaxial digital outputs; fixed and variable analog outputs; headphone iack. Variable-length fade; tape edit; 24-track programming; random play; 4 repeat modes; music calendar; remote control. FR 10-20,000 Hz ±0.2 dB; THD 0.5%; S/N 100 dBA. 19 x 31/4 x 121/4

SD/A-390t 5-Disc Tube CD Chang 1-bit D/A converter, 5-disc carousel. Two vacu

um tubes in output stage; proprietary Soft EQ circuitry designed to correct tonal balance and restore missing ambience information for CD's originally recorded as LPs. Fixed and variable line-level outputs; coaxial digital output; headphone jack with volume control. Nonvolatile output-level memory for 100 discs; ability to change 4 CD's while 5th plays; 5 repeat modes and 3 random-play modes; 20-track programming; fluorescent display; remote control...\$700

SD/A-360 5-Disc CD Changer

1-bit D/A converter. Features 3-beam laser pickup. Coaxial digital output. Ability to change 4 CD's while 5th plays; 32-track pro-gramming; random play; 4 repeat modes; remote control...

CREEK CD60 CD Player

DENON DCD-2700 CD Player

8x oversampling, four 20-bit D/A converters. Features proprietary ALPHA processor to re-cover 20-bit data from CD's. Fiber-ontic and coaxial digital outputs; headphone jack with volume control. Digital pitch control; multiple tape-edit modes; digital fader; peak-level search; 20-track programming; normal/program random play; 3 repeat modes; direct track access; auto space; timer; Denon IS-system remote-control compatibility; remote control. FR 2-20,000 Hz ±0.2 dB...\$1.200

LA-3100 Combi-Player Plays CD's and videodiscs. Features 20-bit dig-

ital filter, Coaxial digital output, Dual-side videodisc play; direct track access; highlight scan; random play; 20-track programming; front-panel and remote jog/shuttle; Denon IS-system remote-control compatibility. FR 4-20,000 Hz +0.2 dB

LA-2100 Combi-Player

Plays CD's and videodiscs. Dual-side videodisc play; front-speaker surround mode; movie-ambience soundtrack mode; auto disc-type selection; one-song-pause karaoke function; video intro scan: audio highlight scan: 24-track programming; random/repeat play; digital level control; shuttle control; Denon IS-system remote-control compatibility. FR 4-20,000 Hz ±0.2 dB; THD 0.0025%; S/N 113 dB; dynamic range 98 dB ...

DCD-1290 CD Player

8x oversampling, dual 20-bit ladder-type D/A converters. Features 20-bit digital filter. Fiberoptic and coaxial digital outputs; headphone jack with volume control. Digital pitch control: digital fader; peak search; index search; 20track programming; 2 random-play modes; direct track access; 3 repeat modes; tape edit; auto space; Denon IS-system remote-control compatibility: remote control. FR 2-20,000 Hz ±0.2 dB; THD 0.0025%; S/N 110 dB.

DCD-695 CD Player

8x oversampling, dual 18-bit D/A converters. Features 20-bit digital filter with noise shaping. Coaxial digital output; headphone jack with volume control. 12-step digital attenuator; 20track programming; direct track access; 3 repeat modes; tape edit; auto space; Denon IS-system remote-control compatibility; remote control. FR 2-20,000 Hz ±0.2 dB; THD 0.003%; S/N 107 dB .. \$300

CD Changers DN-1200F/C 200-Disc CD Changer 8x oversampling, dual 20-bit D/A converters, two 100-disc travs. Comprises DN-1200F 200disc changer and DN-1200C controller. Changer features 20-bit digital filter; switchable RS-232C/RS422 computer-control interface with 9-pin D-sub connectors. Controller features ability to create and label custom programs: multiple DN-1200F control for up to 800 discs: random/repeat-play modes; alphanumeric display; remote control. Balanced AES/EBU and unbalanced RCA outputs. FR 2-20,000 Hz ±0.5

dB; THD 0.0025%. DCM-520 5-Disc CD Changer

8x oversampling, dual ladder-type D/A converters, 5-disc carousel. Features motor-driven volume control. Coaxial digital output, Non-volatile favorite-track memory for 100 discs; 20-track programming per disc; 5 repeat modes; 3 random-play modes: fluorescent display: Denon ISsystem compatibility; remote control. FR 2-20,000 Hz ±0.2 dB; THD 0,003%; S/N 110 dB; dynamic range 98 dB; ch sep 102 dB. \$500

DCM-440 5-Disc CD Changer

8x oversampling, dual 18-bit D/A converters, 5disc bidirectional carousel. Coaxial digital output. Nonvolatile favorite-track memory for 100 discs; 5 repeat modes; 3 random-play modes; 20-track programming for each disc; direct track access; Denon IS-system remote-control compatibility; remote control. FR 4-20,000 Hz ±0.2 dB: THD 0.003%: S/N 107 dB\$430 DCM-340. As above, without digital output, favorite-track memory, music calendar, or remote volume control... \$300

DUAL

CD-5150RC CD Player

4x oversampling, dual 16-bit D/A converters, Features motor-driven disc loading. Digital output; headphone jack. 20-track programming; 3speed scan; disc/track repeat; random play; remote control. FR 20-20,000 Hz ±1 dB; S/N 100 dB: dynamic range 95 dB.,

CD-1070RC CD Player

8x oversampling, dual 18-bit D/A converters. Features motor-driven disc loading; 3-beam laser pickup. 16-track programming; random play; auto space; track/disc/program repeat; re-mote control. FR 20-20,000 Hz ±0.7 dB; S/N 103 dB; dynamic range 96 dB...

FISHER

DAC-2403 24-Disc CD Changer Dual 1-bit D/A converters, 24-disc bidirectional carousel. Features vertical CD loading; ability to classify tracks into 7 preset music categories or 31 programmable categories/subcategories cess: 48-track programming; intro scan: 5 repeat modes; random play; scrolling 8-character alphanumeric display; control via RS-717, RS-727, or RS-737 receiver remote controls; remote control, THD 0.03% at 1,000 Hz; S/N 100 dB; dynamic range 90 dB. 161/2 x 71/4 x 151/4 in;

DAC-503 5-Disc CD Changer

Dual 1-bit D/A converters, 5-disc front-loading carousel. Features tape edit: fader: 32-track programming; intro scan; 4 repeat modes: random play; control via RS-717, RS-727, or RS-737 receiver remote controls; remote control. THD 0.04% at 1,000 Hz; S/N 100 dB; dynamic range 90 dB. 16½ x 5 x 15½ in; 14 lb ...

AD-738 CD Player

8x oversampling, dual 16-bit D/A converters. Tape edit; 24-track programming; track skips scan; disc/program repeat; random play. THD 0.04% at 1,000 Hz; S/N 98 dB; dynamic range 90 dB; ch sep 80 dB at 1,000 Hz, 17% x 31/2 x 10% in; 7 lb ...

GOLDSTAR

.\$4,000

FH-R20R 5-Disc CD Changer 8x oversampling, dual D/A converters, 5-disc carousel. Ability to change discs while one plays; 32-track programming; random play; 4 repeat modes; remote control. 14 lb......

HARMAN KARDON

HD7725 CD Player Proprietary D/A conversion. Features fully discrete analog output section; 6 power supplies; spring-loaded disc-tray clamp; motor-driven volume control. Coaxial and fiber-optic digital outputs; fixed and variable analog outputs; headphone jack; system remote-control jack. 30-track programming; index search; intro scan; A/B repeat; 2-speed cue/review; remote control. FR 4-20,000 Hz +0, -0.5 dB; THD 0.0025%; S/N 105 dB; dynamic range 98 dB.....

HD7525 CD Player

Proprietary D/A converter, Features fully discrete analog output section; 4 power supplies; spring-loaded disc-tray clamp. Coaxial digital output: system remote-control jack. 30-track programming; index search; intro scan; A/B repeat: 2-speed cue/review: defeatable display: music calendar; remote control. FR 4-20,000 Hz +0, -1 dB; THD 0.008%; S/N 103 dB; dv namic range 96 dB; ch sep 99 dB...

TI-8500 5-Disc CD Changer I-bit D/A converter, 5-disc carousel. Track pro-



gramming; intro scan; auto space; random play; -speed cue/review: remote control. FR 4-20,000 Hz +0, -2 dB; THD 0.003%; S/N 104 dB...

FL8400 5-Disc CD Changer

Bitstream D/A converter, 5-disc carousel. System remote-control jack. 32-track programming; intro scan; 3 repeat modes; random play; music calendar; remote control. FR 4-20,000 Hz +0, -1 dB; THD 0,008%; S/N 103 dB; dv namic range 95 dB; ch sep 90 dB.....

HD7225 CD Player

Bitstream D/A converter. Features fully discrete analog output section; 4 power supplies. System remote-control jack. Index search; intro scan; A/B repeat: 2-speed cue/review; defeatable display; remote control. FR 4-20,000 Hz +0, -1 dB; THD 0.008%; S/N 104 dB; dynamic range 96.48

Except for the XL-GM800TN, the following feature JVC Compu Link system compatibility, a floating 3-beam laser pickup, a die-cast aluminum base, and 32-track programming

XL-GM800TN 7-Disc Karaoke CD Changer 6-disc magazine, single-disc tray. Video input and output; 2 microphone inputs. Lyric superimposition: digital echo and key controls: vocal replacement; concert-effect mode; single-track play mode; direct track/disc access; 32-track programming; remote control. Includes RF con-

XL-M509TN 7-Disc CD Changer

Dual 1-bit PEM D/A converters, 6-disc magazine, single-disc tray. Features 4th-order noise shaping. Headphone jack with volume control. 8-character magazine/disc-title memory for up to 26 magazines/156 discs; tape edit; delete play; resume play; direct track/disc access; disc/track intro scan; all-disc random play; 4 repeat modes; 15-track music calendar; fluoresent display; remote control with LCD\$400 XL-M409TN. As above, without title memory Remote control without LCD

XL-Z451TN CD Player

Dual 1-bit D/A converters. Features 4th-order noise shaping; balanced buffer circuit. Fiber-optic digital output; headphone jack with volume control. Tape edit: 4 repeat modes: index search; non-track-repeating and delete random play; delete program play; direct track access; synchro play with compatible cassette decks; peak search; remote control. FR 2-20,000 Hz; THD 0.0015%; S/N 112 dB

XL-V261TN CD Player

Dual 1-bit D/A converters. Features 4th-order noise shaping; disc-stabilizer clamp. Headphone jack with volume control. Multiple tape-edit modes; 4 repeat modes; synchro play with compatible cassette decks; peak search; direct track access; 15-track music calendar; remote control. FR 2-20,000 Hz; THD 0.0025%; S/N 106 dB; dynamic range 98 dB and ch sep 94 dB at 1,000 Hz. 171/4 x 41/4 x 101/4 in XL-V161TN, As above, no remote control., \$200

XL-F207TN 5-Disc CD Changer

Dual 1-bit PEM D/A converters, 5-disc frontloading carousel. Features 4th-order noise shaping; disc-clamping stabilizer. Headphone jack with volume control. Direct disc access: random play; repeat; music calendar; fluorescent display; remote control. FR 2-20,000 Hz; THD 0.0025%: S/N 106 dB; dynamic range 98 dB; ch sep 94 dB, 171/4 x 5 x 151/6 in ...

KENWOOD LVD-820R Combi-Player

Dual 1-bit D/A converters, Plays CD's and videodiscs. Features digital time-base correction; 3rd-order noise shaping; digital 3-line comb filter. 2 audio and 2 video outputs; fiberoptic digital output; S-video output; headphone iack with volume control. Dual-side videodisc play; synchro play with compatible cassette decks; random play; intro scan; shuttle control;

LVD-320 Combi-Player

4x oversampling, dual 18-bit D/A converters Plays CD's and videodiscs. Features digital time-base correction. Fiber-optic digital output: S-video output. 20-track programming: synchro play with compatible cassette decks; random play; intro scan; direct track access; remote control. FR 4-20,000 Hz; S/N 94 dB; dynamic range 98 dB; THD 0.005% and ch sep 90 dB at 1.000 Hz. 17% x 4¼ x 10¼ in: 22 lb \$499

DP-2050 CD Player Dual 1-bit D/A converters. Headphone jack. Synchro play with compatible cassette decks; 20-track programming: direct track access: random play; repeat; 20-track music calendar; timer, FR 4-20,000 Hz ±1 dB; S/N 94 dB; THD 0.005% and ch sep 90 dB at 1,000 Hz. 17% x 51/4 x 141/2 in: 12 lb ...

The following feature normal/high-speed synchro play with compatible cassette decks, tape edit from 2 CD's to 2 cassettes, and 20-track programming. Common specs include FR 4-20,000 H: ±1 dB; S/N 94 dB.

DP-M7750 7-Disc CD Changer

Dual 1-bit D/A converters, 6-disc magazine, single-disc tray. Headphone jack with volume control. Program memory for 42 magazines with 8-character alphanumeric labeling for each magazine and each disc within magazine: program memory for single-disc tray; peak search with memory; direct track access; system remote-control compatibility; remote control with LCD, 171/4 x 51/4 x 141/2 in; 12 lb......\$369 DP-M5550. As above, no magazine-program memory or headphone jack .

DP-R4450 5-Disc CD Changer Dual 1-bit D/A converters, 5-disc bidirectional

carousel. Headphone iack with volume control. 20-track programming; multiple tape-edit modes; random play; repeat; system remotecontrol compatibility; remote control. 171/4 x 51/4 x 151/4 in; 12 lb ...

DP-M993 7-Disc CD Changer

Dual 1-bit D/A converters, 6-disc magazine, single-disc tray. Headphone jack with volume control, 20-track programming; multiple tape edit modes; random play; remote control....\$249

KINERGETICS

KCD-20 Platinum Series CD Player 4x oversampling, dual 16-bit D/A converters Features single-beam laser pickup; fully balanced circuit topology; distortion-canceling circuitry. Volume and balance controls: re control. 17 x 4½ x 13 in; 21 lb......

LINN Karik CD Player

1-bit delta-sigma D/A conversion. Features 3beam laser pickup; 4-motor mechanism; dedicated master-clock-frequency oscillator, laser diagnostic output for retailer use. Fiber-optic output; BNC digital output; RCA analog outputs; multiroom input and output. 12½ x 3½ x 12% in: 11 lb. Numerik. D/A-converter upgrade for above with 20-bit conversion......

Mimik CD Player

1-bit D/A conversion. Shock-resistant transport: replaceable laser assembly. Two output pairs; BNC digital output. Remote control\$1,495

MARANTZ CD-11 MkII CD Player

1-bit Bitstream PDM D/A conversion. Features fully floating die-cast-alloy mechanism with single-beam laser mounted on magnetically actuated swing arm; 3rd-order noise shaping; toroidal power supply; die-cast chassis with copper plating. Balanced XLR outputs; coaxial and fiber-optic digital outputs. Favorite-track memory for 195 discs. FR 20-20,000 Hz ±0.1 dB; THD 0.00135% at 1,000 Hz; S/N 108 dB; dynamic range 96 dB; ch sep 100 dB. Gold finish. 181/4 x 41/4 x 131/2 in; 37 lb.....

McIntosh MCD7008 LV-500 Combi-Player

1-bit Bitstream D/A conversion, Plays CD's and videodiscs. 2 RCA audio outputs: Toslink fiber-optic digital output; 1 composite-video output; 1 S-video output; headphone jack with volume control. Dual-side videodisc play; tape edit; highlight scan; 7 CD repeat modes; dualmode color-locked scan for CAV/CLV videodiscs via shuttle control; 9 CAV playback speeds; 8 videodisc repeat modes; single track/ chapter play; last-position memory; 24-chapter/ track programming; remote control with shuttle,

16% x 4% x 16½ in... CD-72 CD Player

I-bit Bitstream D/A conversion. Features 20-bit digital filter; 3rd-order noise shaping; fully floating die-cast alloy single-beam laser mechanism; motor-driven volume control. Fixed and variable analog outputs; fiber-optic and coaxial digital outputs. Nonvolatile favorite-track memory for 127 discs; normal/delete programming and random play; variable-length intro scan; re mote control. FR 20-20,000 Hz ±0.1 dB; S/N 105 dB; dynamic range 96 dB; ch sep 100 dB; THD 0.0015% at 1,000 Hz. Gold finish......\$699

CC-52 5-Disc CD Changer

1-bit Bitstream D/A conversion, 5-disc carousel. Features 18-bit digital filter; 3rd-order noise shaping; 3-beam laser pickup. Fiber-optic digital output; RC-5 system-remote-control jacks. Ability to change 2 discs while one plays; synchro play with compatible cassette decks: tape edit; 32-track programming; 2-speed search; random play; repeat; remote control. FR 20-20,000 Hz ±0.05 dB; S/N 100 dB; dynamic range 96 dB; ch sep 100 dB; THD 0.003%. Gold finish. 16½ x 4½ x 15½ in; 14 lb.....\$399

CD-53 CD Player

Dual 1-bit delta-sigma Bitstream D/A converers. Features 4th-order noise shaping. Coaxial and Toslink fiber-optic digital outputs. Tape edit; peak search; 30-track programming; direct track access; random/repeat play; remote control. FR 5-20,000 Hz ±0.5 dB; THD 0.0025%: S/N 104 dB; dynamic range 96 dB; ch sep 102 dB. 16¼ x 3½ x 12½ in; 13 lb...

McINTOSH MCD7007 CD Player

4x oversampling, dual 16-bit D/A converters. Features one-piece cast platform; linear torque disc motor. Coaxial output. 20-track programming; track scan; repeat; remote control. FR 20-20,000 Hz ±0.3 dB: THD 0.0012%: S/N 107 dBA; dynamic range 96 dB; ch sep 102 dB. 16% x 5% x 13 in; 18 lb...

MCD7008 7-Disc CD Changer

8x oversampling, dual 20-bit D/A converters, MusicBank 6-disc internal magazine plus single-disc tray. Features magnetic disc clamp. Coaxial output; remote-control inputs. 50-track programming; random/repeat play; remote control. FR 5-20,000 Hz ±3 dB; THD 0.002%; S/N

..\$2,500

MELOS CD-T Tube CD Player 1-bit D/A converter. Features 2-chassis design; vacuum-tube output; regulated power supplies.

MERIDIAN

Model 506 CD Player 18-bit D/A converter. Features multiregulated power supplies; discrete Class A output stage. Fiber-optic and coaxial digital outputs: RCA output. Pause; track skip; 4-character track, time, and index display; remote controllable. 12% x 3½ x 13 in ...

MISSION Mission DAD5 CD Player

I-bit D/A converter. Features steel-reinforced chassis with aluminum front panel. S/N 98 dB: THD 0.005%; dynamic range 92 dB; ch sep 90 dB, 14% x 4 x 11% in; 7.7 lb ...

MITSUBISHI M-V6022 Combi-Player

Plays CD's and videodiscs. Features dual-side

MTX SOUNDCRAFTSMEN

CD-100 CD Player Philips 7321 1-bit Bitstream D/A conversion. Coaxial digital output, 20-track programming: random play; remote control. S/N 100 dB; dynamic range 96 dB; ch sep 100 dB. 17 x 51/4 x

MAD Model 5000 CD Player

1-bit MASH D/A converter. Features separate regulated power supplies for analog and digital sections. Fixed and variable outputs; serial digital output. 20-track programming; remote con-trol. FR 5-20.000 Hz; THD 0.002%; S/N 106

Model 505 5-Disc CD Changer

1-bit MASH D/A converter, 5-disc carousel. Features individually filtered and regulated DC power supplies. Coaxial digital output; NAD-Dink multiroom jacks. Ability to change 2 discs while one plays; 32-track programming; ran-dom play; remote control. FR 20-20,000 Hz -1 dB: THD 0.0025%; S/N 106 dB; dynamic range 98 dB, 161/2 x 51/4 x 147/6 in . \$300

Model 502 CD Player

1-bit MASH D/A converter. Features DC coupling. Digital output; NAD-Link multiroom jacks. 21-track programming; direct track ac-cess; remote control, FR 5-20,000 Hz ±5 dB; S/N 105 dB; dynamic range 98 dB; ch sep 100 dB at 1.000 Hz. 16½ x 3% x 11% in......\$299

NAIM

NA CDS CD Player 4x oversampling, Philips 16-bit D/A converter, Features top-loading design; separate power supply; precision-suspended mounting for custom high-torque transport: low-mass magnetic clamp; DC offset-sensing protection circuits with fail-safe relay muting. Remote control. FR 10-18,000 Hz ±0.1 dB... \$6,925

NA CDI CD Player

4x oversampling, 16-bit D/A converter. Features top-loading design; internally suspended subchassis for transport and D/A board; low-mass magnetic clamp. Remote control. FR 10-18,000 Hz ±0.1 dB; THD 0.01%, 17 x 3 x 12 in ..\$3.565

NAKAMICHI The following feature Nakamichi's MusicBank 6-disc internal magazine plus a single-disc tray.

MB-1 7-Disc CD Changer

8x oversampling, 20-bit D/A converter, Features hand-selected converter ICs; discrete 3rdorder Bessel analog low-pass filter; rigid 2-layer steel chassis: magnetically clamped disc stabilizer; multiregulated power supply; servo system, Gold-plated coaxial digital output. Synchro play with compatible cassette decks; delete play; random/repeat play; remote control. FR 5-20,000 Hz ±0.5 dB: THD 0,0025%: S/N 105 dB; ch sep 100 dB. 16 x 3 x 14% in\$1,299 MB-2. As above, without hand-selected IC's

and gold-plated digital output. Features headphone jack with volume control...... MB-3 7-Disc CD Changer

8x oversampling, dual 18-bit D/A converters. Features disc stabilizer; 3rd-order Bessel-type analog low-pass filter; multiregulated power supply; isolated-ground topology; floating discdrive mechanism. Headphone jack with volume control. Random/repeat play; delete play; track scan; remote control. FR 5-20,000 Hz ±0.5 dB; THD 0.0035%; S/N 103 dB; dynamic range 98 dB; ch sep 95 dB. 16 x 3 x 141/4 in; 17 lb....\$649

MB-4S 7-Disc CD Changer

4x oversampling, dual 16-bit D/A converters, 6disc magazine, single-disc tray. Features 3rd-order Bessel-type analog low-pass filter. Random/repeat play; LCD; remote control. FR 10-20,000 Hz ±0.5 dB; THD 0.035%; S/N 87 dBA; dynamic range and ch sep 85 dB. 16% x 4 x 11 in; 11 lb. \$399



Nakamichi MB-3

NIKKO NCD 950R CD Player

1-bit D/A converter. 20-track programming; random play; track skip/scan; 3 repeat modes; intro scan: LCD: remote control, 161/2 x 23/4 x \$140

NSM CD 3101 100-Disc CD Changer System

I-bit D/A converter, two 50-disc magazines, programmable controller with single-disc tray. Features Philips CDM-4 laser system. LED display; random/repeat play; advance play of any track in changer; 99-program memory. FR 20-20.000 Hz +0.15 dB. -0.02 dB; THD 0.035%; S/N 94 dBA; ch sep 89 dB at 1,000 Hz. Chang er: 18½ x 13½ x 8½ in: 33 lb. Controller: 16½ x 3½ x 11 in; 9 lb.

ONKYO

Next-selection function permits selecting next track without interrupting current track. All models except DX-V801 are compatible with Onkyo's RI system control. DX-V801 Combi-Player

8x oversampling, dual 20-bit D/A converters.

Plays CD's and videodiscs. Features centered tray; aluminum front panel. Two sets of A/V outputs. Intro scan; 24-track programming; 7 repeat modes: A/B repeat; random play; direct track access; on-screen displays; remote control. FR 4-20,000 Hz ±0.5 dB; THD 0.003%; S/N 107 dB; dynamic range 98 dB. 18 x 51/4 x

Integra DX-708 CD Player

Dual 1-bit D/A converters. Features optical coupling; linear motor drive; transformer designed to prohibit electromagnetic interference; copper-plated chassis; complementary distortion canceler; centered tray; die-cast aluminum tray. Fiber-optic output. Program reverse; auto spacing; peak search; auto fade; 2 random-play and 5 repeat modes; 2-speed scan; switchable display dimmer, RI-system cassette-deck compati bility; remote control. FR 2-20,000 Hz; THD 0.002%: S/N 110 dB: dynamic range 100 dB: ch sep 110 dB at 1,000 Hz. 18 x 51/4 x 141/4 in; \$750

Integra DX-706 CD Player

Dual 1-bit D/A converters, Features linear-motor drive; complementary distortion canceler; centered tray; die-cast aluminum tray. Fiber-optic output. Program reverse; auto spacing; peak search; auto fade; 2 random-play and 4 repeat modes; 2-speed scan; switchable display dimmer; RI-system cassette-deck compatibility; remote control. FR 2-20,000 Hz: THD 0.002%: S/N 110 dB; dynamic range 100 dB; ch sep 110 dB at 1,000 Hz, 18 x 51/4 x 141/4 in; 18 lb....\$550

DX-705 CD Player Dual 1-bit D/A converters. Fiber-optic output: headphone jack with volume control. Program memory for 204 discs; program reverse; nextselection function; synchro play with compatible cassette decks; peak search; 5 repeat modes; random play; 36-track programming; 20-track music calendar; direct track access; switchable display dimmer; remote control. FR 5-20,000 Hz: THD 0.004%: S/N 100 dB: dynamic range 96 dB; ch sep 90 dB at 1,000 Hz, 18 x 43/4 x 12 in; 11 lb...

DX-703 CD Player

Dual 1-bit D/A converters. Fiber-optic output; headphone iack with volume control. Next-selection function; synchro play with compatible cassette decks; peak search; 4 repeat modes; random play: 36-track programming: 20-track music calendar; direct track access; RI-system cassette-deck compatibility; remote control. FR 5-20,000 Hz; THD 0.004%; S/N 100 dB; dynamic range 96 dB; ch sep 90 dB at 1,000 Hz 18 x 4½ x 12 in: 11 lb...

DX-716 CD Player

Dual 1-bit D/A converters. Headphone jack with volume control. Synchro play with compatible cassette decks; 20-track programming; 3 repeat modes; 20-track music calendar. FR 5-20,000 Hz; THD 0,004%; S/N 100 dB; dynamic range 96 dB; ch sep 90 dB at 1,000 Hz, 18 x 41/s x 12 in; 11 lb.

CD Changers Integra DX-C909 6-Disc CD Changer Dual 1-bit D/A converters, 6-disc carousel, Fea-

tures transformer designed to prohibit electromagnetic interference; copper-plated chassis; motor-driven volume control. Fixed and variable analog outputs; fiber-optic output; headphone jack with volume control. Ability to change 3 discs during play; program reverse; synchro play with compatible cassette decks; peak search; 40-track programming; random play: 6 repeat modes; next-selection function; direct track/disc access: RI-system cassettedeck compatibility; remote control. FR 2-20,000 Hz; THD 0,0028%; S/N 106 dB, 18 x 556 x 17 in: 20 lb ... \$650

Integra DX-C606 6-Disc CD Changer

Dual 1-bit D/A converters, 6-disc carousel. Fiber-optic output; headphone iack with volume control. Ability to change 3 discs during play; program reverse; synchro play with compatible cassette decks; peak search; 40-track programming; random play; 6 repeat modes; next-selection function; direct track/disc access; 20-track music calendar; RI-system cassette-deck com patibility; remote control. FR 2-20,000 Hz; THD 0.0028%; S/N 106 dB; dynamic range 98 dB; ch sep 92 dB at 1,000 Hz, 18 x 51/4 x 17 in: 20 lb..

DX-M505 6-Disc CD Changer

Dual 1-bit D/A converters, 6-disc magazine. Program memory for 341 discs; peak search; 36-track programming: next-selection function: 6 repeat modes; random play; direct track/disc access; remote control. FR 5-20,000 Hz; THD 0.004%; S/N 100 dB; ch sep 92 dB at 1,000 Hz. 18 x 41/4 x 121/6 in: 13 lb.

DX-C210 6-Disc CD Changer

Dual 1-bit D/A converters, 6-disc carousel. Ability to change 3 discs during play; random play: 40-track programming; next-selection function; 5 repeat modes; 20-track music calendar; fluorescent display; RI-system cassettedeck compatibility; remote control. FR 2-20,000 Hz; THD 0.004%; S/N 96 dB; dynamic range 96 dB; ch sep 90 dB at 1,000 Hz, 18 x 41/4 x 1614 in; 17 lb.

DX-C110 6-Disc CD Changer

Dual 1-bit D/A converters, 6-disc carousel. Headphone jack. Ability to change 3 discs during play; synchro play with compatible cassette decks; 40-track programming; random play; 5 repeat modes; next-selection function; 20-track music calendar; RI-system cassette-deck compatibility; remote control. FR 2-20,000 Hz; THD 0.004%; S/N 96 dB; dynamic range 96 dB: ch sep 90 dB at 1,000 Hz, 18 x 41/4 x 161/4

OPTIMUS BY RADIO SHACK

CD-7105 6-Disc CD Changer 6-disc magazine. Headphone jack with volume control. Auto digital level control; 10-magazine music-type memory; highlight scan; delete play; last-disc memory; tape edit; digital fader; 32-track programming; 7 repeat modes; random play; synchro play with compatible cassette decks; fluorescent display; remote control. S/N 98 dB. 161/4 x 4 x 111/2 in... \$249

CD-7500 5-Disc CD Changer

8x oversampling, 5-disc carousel. Features 3beam laser pickup; floating disc tray. Headphone jack with volume control. Tape edit; intro scan: 32-track programming; random play; 5 repeat modes: track search/sean: 19-track music calendar; digital display including elapsed/remaining time; remote control. Dynamic range 95 dB. 16% x 4 x 15% in...

CD-6300 5-Disc CD Changer 1-bit D/A conversion, 5-disc carousel. Features intro scan; index search; tape edit; 32-track programming; one/all-disc and program repeats; random play; track skip/ scan; remote control. S/N 105 dBA; dynamic range 90 dB; ch sep 90 dB. 173/s x 41/2 x 151/s in ...

CD-5500 CD Player

8x oversampling. Features floating disc tray. Headphone jack with volume control. Delete play; 4 repeat modes; intro scan; tape edit; 20track programming; random play; track skip/ scan; 15-track music calendar; digital display including elapsed/remaining time: remote con-trol. FR 20-20,000 Hz ±1 dB; S/N 95 dBA; dynamic range 92 dB, 161/4 x 31/4 x 91/4 in......\$180

PANASONIC LX-900 Combi-Player

I-bit MASH D/A conversion. Plays CD's and videodiscs. Features one-spindle brushless direct-drive motor; digital time-base corrector; 8bit digital field memory for CAV/CLV special effects; digital comb filter. Fiber-optic digital output; S-video output; headphone jack with volume control. Dual-side videodisc play; theater modes; frame-number CAV-videodisc search; elapsed-time CLV-videodisc search; 20chapter/track programming; CD random play: iog/shuttle controls on front panel and remote control; on-screen displays including level meters; remote control. FR 4-20,000 Hz; THD 0.0023%; S/N 115 dB; dynamic range 98 dB. 17 x 5 x 16% in; 21 lb..

LX-K700 Karaoke Combi-Player

I-bit MASH D/A conversion, Plays CD's and videodiscs. Features one-spindle brushless direct-drive motor; digital time-base corrector. Audio input: S-video output: two microphone inputs; headphone jack with volume control. Dual-side videodisc play; voice-removal function; vocal/instrumental balance function; 7-step digital key control; staccato vocal effect; 8-track programming; stage, theater, and music acoustic modes; adjustable echo; elapsed-time CLVvideodisc search: frame-number CAV-videodisc search; direct track access; on-screen displays; fluorescent display; remote control. FR 4-20,000 Hz; THD 0.005%; S/N 100 dB; dynamic range .\$1,100 94 dB. 17 x 5 x 16% in; 21 lb..

LX-600 Combi-Player

1-bit MASH D/A conversion. Plays CD's and videodiscs. Features digital servo control; digital time-base corrector; digital comb filter. Fiber-optic digital output: S-video output: head phone jack with volume control. Dual-side videodisc play; elapsed-time CLV-videodisc search: frame-number CAV-videodisc search: still frame; 20-chapter/track programming; CD random play; shuttle rings on front panel and remote control; on-screen displays including level meters; remote control. FR 4-20,000 Hz; THD 0.003%; dynamic range 96 dB. 17 x 5 x 16% in; 20 lb .. \$800

LX-101 Combi-Player

1-bit MASH D/A conversion. Plays CD's and videodiscs. Digital comb filter: digital timebase corrector. S-video output; headphone jack with volume control. Chapter/track skip/search; elapsed-time CLV-videodisc search: framenumber CAV-videodisc search; CD random play; 6 repeat modes; 20-chapter/track programming; multiple tape-edit modes; intro scan; shuttle control; on-screen displays including level meters; remote control, FR 4-20,000 Hz; THD 0.006%; S/N 101 dB; dynamic range 94

dB, 17 x 41/2 x 151/4 in; 18 lb. SL-PD347 5-Disc CD Changer

1-bit MASH D/A conversion, front-loading bidirectional 5-disc carousel. Ability to change four discs while fifth plays; highlight scan; 32track programming; repeat; random play. 141/4 x 514 x 1616 in: 10 lb

PARASOUND C/DX-88 CD Player

8x oversampling, dual 18-bit D/A converters Features regulated power supply; digital output; headphone jack; gold-plated outputs. 20-track programming: repeat; remote control. FR 5-20,000 Hz; THD 0.002%; S/N 110 dB......\$370

PHILIPS CD-950 CD Player

Dual 1-bit Bitstream D/A converters. Features CDM-9 laser mechanism; metal construction with aluminum front panel. Coaxial and fiberoptic digital outputs; gold-plated headphone jack with volume control. 20-track programming; intro scan; random play; repeat; program memory for 256 CD's; tape edit; direct track access; synchro play with compatible cassette decks; music calendar; dot-matrix fluorescent display; remote control. \$600

CDC-935 5-Disc CD Changer Dual 1-bit D/A converters, 5-disc carousel.

Coaxial digital output; headphone jack with volume control. Ability to change 3 discs while one plays; 20-track programming; random play; direct track access; program memory for 256 CD's; multiple tape-edit modes; 3 user presets; music calendar; fluorescent display; remote control \$300 CDC-925. As above, without coaxial digital

iack ... \$230 CD-920 CD Player Dual 1-bit D/A converters. Coaxial digital outputs; headphone jack with volume control, 20-

5180

track programming; random play; tape edit; fluorescent display; remote control

CD-910 CD Player Dual 1-bit D/A converters. Headphone iack with volume control. 20-track programming: random play; tape edit; music calendar; fluore cent display...



Onkvo DX-C210

PIONEER CAC-V3000 300-Disc CD Changer

Features two independent laser pickups ing zero wait time between tracks. PC control interfaces. Cross fading.

CLD-D702 Combi-Player Dual 1-bit D/A converters, Plays CD's and

videodiscs. Features CX NR; digital time-base corrector, 8-bit digital field memory for special effects; digital comb filter. 2 S-video outputs; 2 gold-plated A/V outputs; fiber-optic and coaxial digital audio outputs. Dual-side videodisc play: 9-speed forward/reverse CAV/CLV videodisc play; forward/reverse CAV/CLV videodisc still/ step play; last-picture memory; 8 repeat modes; 24-chapter/track programming; random play; frame-number search for CAV discs; time-num ber search for CLV discs; direct chapter/track access: front-nanel and remote iog/shuttle controls; on-screen displays; SR-system remotecontrol compatibility; illuminated remote con-trol. FR 4-20,000 Hz; THD 0.0017%; dynamic range 99 dB. 161/4 x 53/4 x 171/4 in

CLD-D502 Combi-Player

I-bit D/A converter. Plays CD's and videodiscs.
Features CX NR: CD-direct mode with videocircuitry defeat. 2 A/V outputs. Dual-side videodisc play; last-picture memory; 9-speed forward/reverse CAV-videodisc play: forward/ reverse CAV-videodisc still/step play; digital level control; front-surround mode; multiple tape-edit modes; frame-number search for CAV discs; time-number search for CLV discs;

track/time CD search; 8 repeat modes; random play: 24-chapter/track programming; direct chanter/ track access: front-panel shuttle ring: chapter/ track access; from paner sames may, on-screen displays; SR-system remote-control compatibility; remote control. FR 4-20,000 Hz; THD 0.0025%; S/N 113 dB; dynamic range 98 dB, 16% x 5% x 17% in .

CLD-M401 5-Disc Combi-Changer

1-bit D/A conversion, 5-disc CD tray combined with videodisc tray. Plays CD's and videodiscs. Features videodisc play without removing CD's: CX NR. 2 A/V outputs: fiber-optic output; S-video output; headphone jack with volume control. Auto digital level control: multiple tape-edit modes; 9-speed forward/reverse CAVvideodisc play; still/step CAV-videodisc play; last-picture memory; frame-number search for CAV discs; time-number search for CLV discs; front-surround mode; 24-chapter/track programming; direct chapter/ track access; chapter/track search; front-panel and remote shuttle rings; onscreen displays; SR-system remote-control compatibility; remote control. FR 4-20,000 Hz; THD 0.0025%. 16% x 5% x 17¼ in5760 CLD-M301. As above, 1 A/V output. Without 9-speed forward/reverse play, fiber-optic output, S-video output, or shuttle rings. THD 0.003%. 161/4 x 51/4 x 171/2 in.

CLD-S201 Combi-Player

1-bit D/A converter. Plays CD's and videodiscs. Features separate CD tray telescoped within videodisc tray; CD-direct mode with video-circuitry defeat; CX NR. Digital level control; multiple tape-edit modes: last-picture memory: videodisc intro scan; CD highlight scan; framenumber search for CAV discs; time-number search for CLV discs; 7 repeat modes; 9-speed forward/reverse CAV-videodisc play; forward/ reverse CAV-videodisc still/step play; 24-chapter/track programming; random play; direct chapter/track access; front-panel shuttle ring; on-screen displays including level meters; SR system remote-control compatibility; remote control. FR 4-20.000 Hz; THD 0.003%. 16% x 4% x 15% in; 16 lb.

PD-TM3 18-Disc CD Change

1-bit D/A converter, three 6-disc magazines. Features DSP for jazz, church, dance, hall, and stadium sound fields. Headphone jack with volume control. Direct track access; multiple tapeedit modes; auto digital level control; remote level control; digital fader; delete play; last-position memory; 48-track programming; highlight scan; 7 repeat modes; normal/delete random play; fluorescent display; remote control. S/N 102 dB; dynamic range and ch sep 96 dB. 16% x 7 x 13½ in ..

PD-DM902 12-Disc CD Changer

I-bit D/A converter, two 6-disc magazines. Features DSP for jazz, church, dance, hall, and stadium sound fields. Headphone jack with volume control. Direct track access; multiple tape-edit modes; delete play; auto digital level control; digital fader; highlight scan; last-position memory; remote level control; 40-track programming: 7 repeat modes; normal/delete random play; fluorescent display; remote con-trol. S/N 102 dB; dynamic range and ch sep 96 dB. 16% x 5% x 12% in\$435 PD-DM802. As above, without DSP. ...\$375

PD-M702 6-Disc CD Changer I-bit D/A converter, 6-disc magazine. Head-phone jack with volume control. Direct track

access; delete play; multiple tape-edit modes;

music-type labeling and memory for 10 magazines; auto digital level control; remote level control: digital fader: highlight scan; last-disc memory; 32-track programming; 7 repeat modes; normal/delete random play; remote control. S/N 102 dB; dynamic range 96 dB. 16% x 41/4 x 111/4 in \$300 PD-M552. As above, without direct track ac-cess or headphone jack. S/N 98 dB\$275 PD-M502. As PD-M552, no remote\$260 \$260

Karaoke Combi-Players

The following feature an 11-step digital key control, digital echo, two microphone inputs with independent volume controls, direct track access, and a headphone jack.

CLK-V940 Karaoke Combi-Player System

Two 1-bit D/A converters. Combi-player, cassette deck, 35-W/ch amplifier, and two 2-way speakers in integrated system. Plays CD's and videodiscs. Features 3-mode DSP for music, theater, and karaoke sound fields, 2 aux inputs, Dual-side play; one-touch karaoke mode; karaoke song programming; sound-character memory for one-touch recall of 8 musical combinations; 2 vocal-effect modes; chorus function; bass boost; party mode; practice mode. FR 4-20,000 Hz. 31½ x 23½ x 21½ in; 99 lb...\$2,100

CLD-V840 Karaoke Combi-Player

I-bit D/A converter. Plays CD's and videodiscs. 2 A/V outputs; aux input. Dual-side play; CD-direct mode; one-touch karaoke iode; vocal tone control; karaoke intro scan 24-track programming, FR 4-20,000 Hz; S/N 102 dB; dynamic range 96 dB. 16% x 5% x 171/4 in: 19 lb... \$1.100



CLD-V740 Karaoke Combi-Player 1-bit D/A converter. Plays CD's and videodiscs.

2 A/V outputs; aux input. Features independent CD tray. One-touch karaoke mode: karaoke intro scan; 24-track programming. FR 4-20,000 Hz; S/N 100 dB; dynamic range 95 dB. 16% x 4% x 15½ in; 17 lb... \$900 Dual 1-bit D/A converters. Plays CD's and

CLD-97 Combi-Player

videodiscs. Composite and S-video outputs; fiber-optic and coaxial digital-audio outputs. Features dual-side videodisc play; freeze frame, multispeed forward/reverse, and strobing for CLV and CAV videodiscs; 24-chapter/track programming; highlight scan; 8 repeat and 2 random modes; auto tape edit. Remote control with jog/shuttle ring. Glossy black finish with wood end panels. 18 x 61/4 x 171/4 in\$2,500

CLD-52 Combi-Player

Dual 1-bit D/A converters. Features digital 3line comb filter; CD-direct mode. 2 A/V outputs; 2 S-video outputs; fiber-optic and coaxial digital outputs; gold-plated terminals. Dual-side videodisc play; theater audio mode; digital level control; tape edit; intro/highlight scan; shuttle ring: remote control with illuminated keys. FR 4-20,000 Hz ±0.3 dB: THD 0.0017%: S/N 115 dB; dynamic range 99 dB; ch sep 105 dB. 171/4 x 51/4 x 171/4 in; 20 lb...

PD-65 CD Player

Dual 1-bit D/A converters. Features centered tray; 2nd-order noise shaping; proprietary digital processing to smooth FR; direct signal paths; separate circuit boards and transformers for analog and digital sections; Class A FET buffer amp. Fiber-optic and coaxial digital outputs. Random play; repeat; track search; direct track access; defeatable display; remote control. FR 2-20.000 Hz: THD 0.002%; S/N 111 dB; dynamic range 98 dB; ch sep 107 dB. 181/4 x 51/4 x 13 in; 21 lb..

PD-M77 6-Disc CD Changer

6-disc magazine. Features 5-mode DSP for jazz, church, dance, hall, and stadium sound fields. Fiber-optic and coaxial digital outputs; headphone jack with volume control. Memory for play modes of up to 20 magazines; magazine programming according to musical genre; auto digital level control; synchro play with compatible cassette decks; highlight scan; 32-track programming; normal/delete random play; lasttrack memory; direct track/disc access; 15-track music calendar, remote control. Includes singledisc loader, 181/4 x 53/4 x 13 in; 13.6 lb.......\$770 PD-M53. As above, without DSP, 17% x 5% x 14% in; 24 lb.

PD-54 CD Player

Fiber-optic and coaxial digital outputs, Features stable platter mechanism; centered tray. Tape edit; synchro play with compatible cassette decks; peak search; defeatable display; 20-track music calendar; remote control. 181/4 x 51/4 x 13 in; 20.9 lb.

PROCEED Proceed CD Library 100-Disc Changer

8x oversampling, 18-bit D/A converter, 100disc jukebox. Digital output; single-ended/balanced fixed and variable line-level outputs. 2 random-play modes; sequence and delete modes; track access by title, artist, or musical genre; remote control with LCD. FR 10-20,000 Hz 0. -0.2 dB: THD 0.004%: S/N 105 dB: ch sep 120 dB. 33¼ x 21¼ x 21¼ in\$12,000 Proceed CD Library. Without top cover for custom installations

PCD-3 CD Player

8x oversampling, 20-bit D/A converter. Aluminum frame; lead-filled antivibration base. FR 10-20.000 Hz -0.2 dB: THD 0.004% at 1.000 Hz; S/N 107 dB; dynamic range 104 dB; ch sep 120 dB, 8½ x 9 x 13½ in: 35 lb\$2.995

QUAD Quad 67 CD Player

64x oversampling, 18-bit Crystal Semiconductor D/A converter. Features Philips CDM-9 mechanism; MOSFET Class A final-stage amplifier. Digital and analog outputs. Track programming; remote control. FR 4-21,000 Hz ±0.1 dB; THD 0.002%; S/N 114 dB. 12 x 3 x 9

QUASAR CD893 5-Disc CD Changer

I-bit MASH D/A converter, 5-disc bidirectional front-loading carousel. 32-track programming; 3 random-play modes; repeat; fluorescent display: remote control. FR 2-20,000 Hz +1 dB; S/N 100 dB, 17 x 5½ x 15½ in: 11 lb.......\$250 CD853. As above without remote control and bidirectional carousel, 14¼ x 5 x 15¾ in \$230

CD832 CD Player

1-bit MASH D/A converter. 20-track programming: track skip/scan; repeat; fluorescent dis-play with music calendar. FR 2-20,000 Hz +1 dB; S/N 100 dB. 14½ x 3½ x 11 in; 7 lb ...\$180

RCA RP8055 5-Disc CD Changer

8x oversampling, dual 18-bit D/A converters, 5disc front-loading carousel. 32-track programming; random play; fluorescent display; remote control. 17 x 4% x 18% in...

CD1051M CD Player

2x oversampling, dual 16-bit D/A converters.

ROTEL RCD965LE CD Player

Philips SAA7323 Bitstream D/A conversion Features hand-selected analog-filter com nents. Remote control

RCC940AX. 5-disc carousel CD changer with Bitstream D/A conversion. Direct disc access; ternote control

RCD955AX CD Player

4x oversampling, Philips 16-bit D/A conversion; balanced circuitry. Remote control\$450 RCD945AX CD Player 1-bit D/A conversion. Features 2-stage filtering

design. 20-track programming. FR 20-20,000 Hz; THD 0.0025%; S/N 100 dB; dynamic range 96 dB, 17% x 3% x 12½ in

SANSUI CD-X317 CD Player

Eight 1-bit MASH D/A converters. Centered tray orientation. Headphone jack with volume control. 24-track programming; 4 repeat modes; track skip/scan; timer; remote control. FR 4-20,000 Hz; THD 0.002%; S/N 110 dB; dynamic range 98 dB.

CD-390M 5-Disc CD Changer

8x oversampling, dual 16-bit D/A converters, 5-disc carousel. 30-track programming; random/ repeat play: track skip/scan; synchro play with compatible cassette decks; auto space; remote control. FR 5-20,000 Hz ±1 dB; THD 0.03%; S/N 95 dB; dynamic range 95 dB. 17 x 5 x 15 in: 12 lb...

CD-117K Karaoke CD Player

8x oversampling, dual D/A converters. Features 3-beam laser pickup. Mic input. Karaoke vocal suppression; echo switch; mic volume control; 25-track programming; random play; 5 repeat modes; track skip/scan; remote control. FR 8-20,000 Hz ±1 dB; THD 0.08%; S/N 100 dB; dynamic range 90 dB; ch sep 85 dB. 17 x 3% x 111/4 in; 7 lb.

CD-270 CD Player

25-track programming; random play; 5 repeat modes; track skip/scan; remote control. FR 4-20,000 Hz ±1 dB; THD 0.08%; S/N 100 dB, 17 x 31/4 x 111/4 in; 7 lb... \$199

SHERWOOD CDC-5030R 5-Disc CD Changer

1-bit D/A converter, 5-disc front-loading carousel. Headphone jack with volume control 32-track programming; direct track access; random play; 7 repeat modes; timer; remote control; Sherwood Digi-Link III system remotecontrol compatibility ..

CD-3030R CD Player

1-bit D/A converter. Headphone iack with volume control. 20-track programming; random play; 5 repeat modes; intro scan; delete play; direct track access; tape edit; Sherwood Digi-Link III system remote-control compatibility; remote control

CD-3010R CD Player 8x oversampling, dual 18-bit D/A converters

Features multiregulated power supply. Head phone jack with volume control, 20-track progrumming; random/repeat play; intro scan; auto space; direct track access; Sherwood Digi-Link Il system remote-control compatibility; remote control. FR 20-20,000 Hz ±0.5 dB; S/N 103 dB 171/4 x 31/4 x 91/2 in; 7 lb...

SONY CDP-CX100 100-Disc CD Changer

100-disc internal storage. Fiber-optic digital output; gold-plated variable line-level output. Memory for deletions and output levels; delete play; direct track access; 20-track music calendar. 17 x 10½ x 17 in ...

CDP-C910 10-Disc CD Changes

10-disc magazine. Headphone jack. Program memory for 184 discs; direct track access; peak search; random play; 7 repeat modes; remote control. FR 20-20,000 Hz ±0.3 dB; THD 0.003%; S/N 110 dB; dynamic range 100 dB; ch sep 105 dB. 17 x 41/4 x 13 in.... \$480

CDP-C745 5-Disc CD Changer

5-disc carousel. Features 5-mode DSP. Fiberoptic digital output; headphone jack with volume control; variable line-level output. Disc memory for delete play, level, and DSP; 5disc/20-track direct access; 6 play and repeat modes; 3-mode track scan; tape edit; remote control. 17 x 5 x 151/4 in \$400 CDP-C545. As above, without DSP or variable output. Memory for delete play only......\$350

CDP-K1A Karaoke CD Player

Features vocal reduction circuit: 18-bit digital filter. Mic inputs; headphone jack. Pitch control; direct track access; remote fader; 20-track music calendar; remote control. FR 2-20,000 Hz ±0.5 dB; THD 0.008%; S/N 98 dB. 14 x 31/4

CDP-C345 5-Disc CD Changer 5-disc carousel. 5-disc/10-track direct access; 6

play and repeat modes; 3-mode track scan; tape edit; remote control. 17 x 5 x 151/4 in\$280

The following feature a 45-bit digital filter with 20-bit output and a dither circuit, an aluminum front panel, a fiber-optic digital output, a goldplated variable line-level output, a headphone jack with volume control, and a remote control.

CDP-X707ES CD Player

Features separate analog and digital power sup plies; spindle motor with sapphire bearings; ce ramic isolation feet; anti-jitter circuitry; digital servo control. Coaxial digital output. 184-disc memory for programs and deletions; multiple tape-edit modes; peak search; delete play; track programming; random play; 8 repeat modes; direct track access; remote fader; display dimmer, Champagne finish with rosewood side panels. 18½ x 4% x 13% in... \$2,000

CDP-C801ES 5-Disc CD Changer

5-disc carousel. Features separate analog and digital power supplies; aluminum disc tray; copper-shielded chassis. DSP for 7 modes with EO and reverb adjustment; 184-disc memory for DSP, levels, and programs; peak search; direct track access; 32-track programming; 8 re-peat modes; 20-track music calendar. Wood side panels. 18½ x 5 x 15½ in.....\$770 CDP-C701ES. As above, without aluminum disc tray or copper-shielded chassis.....



4% x 13% in

CDP-X303ES CD Player Features zinc isolation feet; linear drive motor; anti-litter circuitry: digital servo control, 184disc memory for programs and levels; multiple tape-edit modes; peak search; delete play; track programming; random play; 8 repeat modes; direct track access; remote fader; display dimmer. Champagne finish with rosewood side panels. 18½ x 4½ x 14½ in... CDP-X202ES. As above, without zinc feet, linear drive motor, or rosewood side panels. 17 x

CDP-C601ES 5-Disc CD Changer

5-disc carousel. Direct track access; 32-track programming: 7 repeat modes; 20-track music calendar. 17 x 5 x 151/4 in

SOTA Vanguard II CD Player

Differential Bitstream D/A converter. Features fully balanced design; C-MOS technology; separate power supplies for digital and analog sections; toroidal power transformer; DC-coupled output stage. Fiber-optic and coaxial digital outputs; headphone jack with volume control. Random/repeat play; track skip/scan; remote con-trol. FR 20-20,000 Hz ±0.2 dB; THD 0.002%; S/N 100 dBA; dynamic range 92 dB; ch sep 110 dB. 19 x 3¼ x 12 in; 22 lb.....

TEAC

VRDS-20 CD Player Dual 1-bit double-differential D/A converters. Features disc-clamping system; aluminum turntable; copper-plated chassis; centered tray orientation; aluminum front, side, and upper anels; servo. Coaxial, RCA, XLR, AT&T, STlink, and TDS-link outputs. High-speed scan 52 300 remote control ..

VRDS-10 CD Player

Dual 1-bit double-differential D/A converters. Features disc-clamping system; aluminum turntable; centered tray; servo. Coaxial and fiberoptic digital outputs. Auto fader, 20-track pro

VRDS-7 CD Player

Dual 1-bit double-differential D/A converters. Features disc-clamping system; molded turntable; centered tray orientation. Coaxial and fiber-optic digital outputs. 3 repeat modes; remote control.

CD-P4500 CD Player

AD-400 CD Player/Cassette Deck 8x oversampling, dual D/A converters. Com-

bines. CD player and cassette deck. CD player features 3-beam laser pickup. 16-rande programming; 3 repeat modes. Cassette deck features autoreverse record/play: Dolby B NR: Dolby HX Pro; CD dubbing; peak-level meters. LED displays: headphone jack; remore control. CD: FR 2-20,000 Hz 20.5 dB; THD 0.008%; S/N and ch sep 95 dB. Taper; FR 30-18,000 Hz high bias; S/N 59 dB no NR; W&F 0.08%; svms. 17½ x 5½ x 11½ ni; 10 lb. — \$4.000.

PD-555 CD Player

8x oversampling, Features 3-beam laser pickup; 18-bit digital filter; centered tray, 20-track programming; 2 repeat modes; LED display; remote control. FR 5-20,000 Hz ±1 dB: THD 0,005% and 5N 100 dB at 1,000 Hz; ch sep 85 dB: 174 x 39x x 11% in; 8 lb ... \$190 PD-435. As above, tray not centered ... \$190



TECHNICS SL-P1300 CD Player

Four 1-bit MASH D/A converters. Separate digtical and analog power supplies; linear-motor acess system. Fiber-optic and coaxial digital outputs; balanced outputs; badapdone jack with volume control. 48% pitch control; rocker switch for mking; auto cue; time cueing; 2speed audible search; 3 repeat modes; remote control. 1679, 504 x 1479 in.

SL-P1200 CD Player

2x oversampling, dual D/A converters. Features 9th-order low-pass analog filter. Headphone jack with volume control; rear-panel jack for mixer. Rocker control; ±5% pitch control; 2-speed audible search; auto cue; track skip/scan; 3 repeat modes; 20-track programming: remote control. 17.8 7 x 15 in: 22 lb. 31.600

SL-PS840 CD Player

Eight 1-bit MASH D/A converters. Features digital servo system; Class AA circuitry; instrumentation amplifier. Fiber-optic digital output; headphone jack with volume control. Direct track access; peak search; synchro play with compatible cassette decks; 32-track programing; remote control. FR 2-20,000 Hz ±0.3 dB; THD 0.0018%; S/N 118 dB; dynamic range 99

dB. 17 x 5 x 131/s in; 14 lb.....

SL-P(3440 CD Player

1-bit MASH DJA converter. Features digital servo system. Headphone jack with volume control. Direct track access: tape edit: synchrop play with compatible cassette decks; peak search; random play; 20-track programming; time fade; remote control. FR 2-20,000 Hz ±1 dB. 174 x 4.11 ½ in 8 lb.

..

SL-PG340 CD Player

- I-bit MASH D/A converter, Features digital
servo system. Tape edit; peak search; synchro
play with compatible causette decks; random
play; 20-rack programming; time fact; remotecontrol compatibility with select Technics receivers. FR 2-20,000 Hz ± 1 dB; THD 0.007%;
S/N 100 dB; dynamic range 92 dB. 17 x 5170

in 7.5 lb.

CD Changers
The following feature a five-disc bidirectional
from-loading carousel and the ability to change
four discs while the fifth plays.

SL-PD947 5-Disc CD Changer

1-bit MASH D/A converter. Features digital servo system: linear motor transport. Head-phone jack. Pitch control: tape edit: highlight secan: direct track/disc access; random play; delete play/program: 32-track programming; sync/hro play with compatible cassette decks: remote control. FR : 2-0,000 Hz : 21 dB: THD .0007%; S/N 100 dB: dynamic range 92 dB: 17 st 5/4 x 15/4 it 11 lb ... \$270

SL-PD847 5-Disc CD Changer

SL-PD647 5-Disc CD Change

1-bit MASH D/A converter. Features digital servo system; linear motor transport. Random play, delete play, direct disc access; 32-track programming; repeat; remote-control compatibility with select Technics receivers. FR 2-20,000 Hz ±1 dB; THD 0.007%; SN 100 dB; vanamic range 92 dB, 17 x 5½ x 15½ in... \$220

MAMAHA

CDV-309K Karaoke Combi-Player Player O'Es and videodises. Aux jacks. One-touch karaoke: club and hall karaoke surround modes; 17-step digital eache: stereo multiplex function; multiplex balace control, more and musis surround function and control, more and musis surround function; but the step of the step

CDX-1060 CD Player Four 1-bit D/A converters. Features Class A

CDV-870 Combi-Player Plays CD's and videodiscs. Features all-digital

Flay's CO's and valocidosis, Features stratiguation of digital time base control; color drop-out correction. Fiber-optic digital output. Switchable screen asser; 15-track programming: 10 forwardreverse speeds; shuttle search; 3 repeat modes; CD peak search; freeze frame; singleframe advance; track skipscan; frame or trackmency search movie scar, and on Dobly-level search programming and the control of the conspilent memory search, movie scar, and on Dobly-level system remote-control compatibility; remote control. 5740

CDC-845 5-Disc CD Changer

5-disc carousel, Features PRO-Bit D/A conversion for 16-to 20-bit translation; 22-bit digital filter: noise shaping; digital servo; Class A current buffer amp; disc stabilizer. Fiber-optic digital output; gold-plated variable analog output; gold-plated headphone jack. Tape edit; peak search; intro scan; track programming; random play; repeat; rolling front panel; fluorescent display with defeatable auto dimmer, Yamaha ISsystem remote-control compatibility; remote control. FR 2-20,000 Hz ±0.3 dB; THD 0.002%; S/N 118 dB; dynamic range 100 dB. 17½ x 4 x 15 in: 13.3 lb \$499 CDC-735. As above, 1-bit D/A converters. No Class A stage. CDC-745. As CDC-845, without rolling front panel. Outputs not gold plated. THD 0.0025%; S/N 115 dB, 17½ x 4 x 15½ in; 13 lb\$399

CDC-645 5-Disc CD Changer

CDX-480 CD Player



Yamaha CDV-870

ADCOM GFT-555II AM/FM Tuner

Quartz-referenced digital-synthesis design with 8 AM/8 FM presets. Features buffered output stages using Class A amplifier: 1% Roederstein metal-film resistors; metal-film capacitors. Auto scan; switchable high-blend circuit; mono switch; FL digital display; 5-LED signalstrength display. FM: 50-dB quieting sens 36 dBf stereo; AM rej 70 dB; cap ratio 1.7 dB; S/N 78 dB stereo; THD 0.1% at 1,000 Hz\$350

ARCAM

Delta 280 FM Tuner 20 presets. FM: AM rej 50 dB; cap ratio 1.5 dB; alt-ch sel 60 dB; S/N 70 dB stereo; THD 0.3%; ch sep 40 dB, 17 x 21/2 x 11 in: 6 lb., Alpha 5. As above, 16 presets. FM: S/N 72 dB stereo, 17 x 3 x 10 in; 5 lb ... \$449



AUDIOSOURCE TNR-One AM/FM Tuner

Quartz-PLL design with 20 AM/FM presets. Auto scan and mute; digital display. FM: cap ratio 1 dB; alt-ch sel 65 dB; S/N 70 dB mono, 76 dB stereo, 16½ x 2½ x 11½ in; 8 lb.....\$230

BAK COMPONENTS TS, 108 FM Tuner

Digital-synthesis design with 8 FM presets. Programmable selectivity; mono/stereo and local/DX switches; signal-strength meter; fluorescent display. FM: cap ratio 1.5 dB; ch sep 40 dB. 17 x 21/2 x 9 in; 8 lb..

CAMBRIDGE AUDIO T50 AM/FM Tuner

8 AM/16 FM presets. Auto/manual scan; signal-strength meter; center tuning indicator, FM: cap ratio 2.5 dB; S/N 80 dB mono, 75 dB stereo. 17 x 31/4 x 121/4 in; 8.8 lb..

CARVER TX-11b AM/FM Tuner

Digital quartz-synthesis design with 13 AM/FM presets. AM-stereo reception; multipath-rejection circuitry; AM gain and noise-elimination circuits. Switchable wide/narrow IF; 3-week memory backup; preset scan; auto/manual tun ing. FM: AM rei 65 dB: cap ratio 1 dB: S/N 85 dB stereo; ch sep 45 dB and THD 0.05% at 1.000 Hz. 19 x 3½ x 12½ in; 11 lb\$800

TX-8R AM/FM Tuner

Digital-synthesis design with 20 AM/FM presets. Auto/manual preset scan; mono/stereo switch; FM: AM rej 60 dB; cap ratio 1.5 dB; alt-ch sel 66 dB; S/N 70 dB stereo; THD 0.08%\$350

CREEK T42 FM Tuner

Auto mute; auto frequency control; local/DX and narrow/wide-IF switches\$525

DAY SEQUERRA

Reference FM Tuner Analog design. Features 100-Hz tuning accuracy: multiple IF processors with variable O circuits; dual-mono servos; absolute phase and phase-compensation circuitries; 41/2-in instrument-grade oscilloscope. Balanced outputs. Selectable IF bandwidth. 35 lb.... \$4,800

DENON

TU-680NAB AM/FM Tuner

Broadcast-monitor design with 30 AM/FM presets. Available by special order. Features reference-tuner certification by National Association of Broadcasters; AMAX AM stereo with noiseblanking circuitry: FM section with varactor 5gang-equivalent tuning circuits; MOSFET RF amplifiers; MPX noise-reduction circuitry. Auto-seek and manual-step tuning; switchable wide/narrow IF bandwidth for AM and FM; remote control. FM: 50-dB quieting sens 37.2 dBf stereo; cap ratio 1.3 dB; S/N 82 dBA stereo; THD 0.1% stereo; ch sep 50 dB.,

TU-650RD AM/FM/RDS Tuner

30 AM/FM presets. Features RDS digital-data reception; FM tuner with varactor 4-gangequivalent tuning and MOSFET RF amplifiers: MPX noise-reduction circuitry: AM heat-cut filter. RDS indications of program-service name, RDS search for RDS-equipped stations; RDS program-type search; station-labeling for non RDS stations: switchable wide/narrow IF handwidth; auto-seek and manual-step tuning; alphanumeric fluorescent display; remote control. FM: 50-dB quieting sens 37.2 dBf; cap ratio 1.3 dB; S/N 82 dBA and THD 0.1% stereo\$375

TU-280 AM/FM Tuner Quartz-lock digital design with 30 AM/FM presets. Features AM beat-cut filter; FM section with varactor 3-gang-equivalent tuning circuits. Denon IS-system remote-control compatibility. FM: 50-dB quieting sens 38.5 dBf stereo; cap ratio 1.5 dB; S/N 74 dBA stereo; THD 0.2% stereo; ch sep 40 dB ..

HARMAN KARDON TU9600 AM/FM Tuner

24 AM/FM presets. Features digital fine tuning; FM pilot and subcarrier NR; active tracking circuitry; discrete output stage; high-blend circuit. 2 antenna inputs; Harman Kardon system remote-control inputs, Seek tuning; hi-blend switch: nonvolatile memory of control functions and presets; digital display; LED signal-strength meter; remote control, FM; 50-dB quieting sens 36.2 dBf stereo; AM rej 65 dB at 45 dBf; cap ra-tio 1 dB; alt-ch sel 45 dB, 80 dB with active tracking, 17% x 2% x 13 in; 7.5 lb......\$429 TU9400, As above, without active tracking, digital fine tuning, antenna inputs, or remote

control. FM: 50-dB quieting sens 37.2 dBf stereo; AM rej 50 dB at 45 dBf; cap ratio 1.2 dB; alt-ch sel 65 dB..... \$319 TU9200, As TU9400, without FM pilot/subcarrier NR. AM rej 45 dB at 45 dBf; cap ratio 1.5 dB; alt-ch sel 70 dB.

KENWOOD KT-3050 AM/FM Tuner

Quartz-synthesis design with 30 AM/FM presets. Features pentacle power supply. Switchable wide/narrow IF; timer; fluorescent displa FM: 50-dB quieting sens 16.2 dBf mono, 38.8 dBf stereo; AM rei 76 dB; can ratio 1 dB wide 2.5 dB narrow; S/N (at 85 dBf) 82 dB mono, 77 dB stereo; THD (wide IF) 0.005% mono, 0.08% stereo; ch sep 55 dB at 1,000 Hz. 17% x 3% x 111/2 in; 9 lb.

MARANTZ

ST-53 AM/FM Tuner 59 AM/FM presets. Features dual-gate MOSFET IF section: 4-gang FM front end. 75-ohm antenna input: RC-5 system remote-control interface. 2-week battery-free memory backup; direct station access; separate mono/stereo and muting switches; last-station memory; preset scan; fluorescent display. FM: 50-dB quieting sens 14.8 dBf mono; cap ratio 1 dB; alt-ch sel 75 dB; S/N 80 dB mono, 73 dB stereo; THD 0,1% mono, 0.2% stereo; ch sep 45 dB at 1,000 Hz. 3-yr lim ited warranty. 161/4 x 31/4 in; 9 lb\$299

McINTOSH MR-7083 AM/FM Tuner

PLL design with 8 AM and 8 FM presets. Features D-MOSFET RF amp for FM; JFET amp for AM. FM: 50-dB quieting sens 15 dBf mono, 37 dBf stereo; AM rej 78 dB; cap ratio 1.5 dB; alt-ch sel 70 dB; ch sep 50 dB, 161/4 x 53/4 x 14 in; 16 lb. Also available in a wide-chassis version \$1.750

MERIDIAN

Model 504 FM Tuner

30 presets. Features discrete dual-gate MOS-FET RF amplifiers; two matched-pair ceramic filters; Walsh stereo decoder; auto stereo blend. 8-character alphanumeric display: signalstrength display; preset labeling; seek/scan tuning; mono switch; remote controllable. 12% x

MTX SOUNDCRAFTSMEN T100 AM/FM Tuner

20 AM/FM presets. Features digital quartz curcuitry. Auto/manual tuning. FM: 50-dB quieting sens 34.5 dBf stereo, 11 dBf mono; S/N 70 dB stereo, 75 dB mono; cap ratio 1.5 dB. 17 x 11/4 x 141/4 in .. \$400

MUSEATEX FM-I AM/FM Tuner

Digital-synthesis design with 99 AM/FM presets. Features PLL loop detectors: IF demodulation. 2 antenna/cable inputs. Fine tuning: auto preset store: mono/stereo and IF-handwidth switches; LCD; remote control. 5-yr warranty

Model 402 AM/FM Tuner

14 lb...

24 AM/FM presets. Features IF filters; switchable blending circuit. NAD-Link facility for remote control via other NAD products; highspeed search tuning. FM: cap ratio 1.6 dB; alt-ch sel 58 dB; S/N 74 dB. 16½ x 3 x 11% in;

NAIM NAT 02 FM Tuner

Features progressive switching from mono to

stereo; auto bandwidth selection; digital frequency display increases in brightness to indicate signal strength. 111/4 x 3 x 8 in.........\$1,935



factorydirect sales

THE ADVANTAGES of RDL factory-direct sales are:

You audition RDL speakers at your leisure, playing recordings you are familiar with. You have 30 days to decide whether to keep

- the speakers.

 2. Speakers are likely to sound quite different in your room, placed where they will actually be used, than in a showroom. (Our consultants will suggest which RDL speakers are best suited for the positions they will occupy in your room.) Your buying decision is based on maximum informa-
- 3. Without a retail markup, there is a substantial saving; prices range from \$198 to \$549 a pair.
- THE DISADVANTAGES are:
 1. Unless you have a friend who owns RDL speakers, or you visit the factory showroom in Bellingham, you can't hear them before you order.
- If you decide you don't like them, you have to go to the trouble of calling UPS and sending them back.

For your free catalog of RDL speakers and complete systems: Call 1-800-227-0390 or Fax 1-800-227-9047 or RDL ON-LINE (BBS)

1-800-227-0391 or mail coupon to RDL Acoustics, 26 Pearl Street No. 15, Bellingham, MA 02019.

Please sen	d product info	ormation to:
Name		

NAT 03 FM Tuner Features toroidal transformer. Digital frequency

O N KY O
Integra T-99001 FM Tuner
20 AM/FM presets. Features auto/manual reception-optimization system to select A/B auternations. The present the select affect and the select affect and the select affect and the select affect affect and the select affect a

Integra T-407 AM/FM Tumer
40 AM/FM persis Features auto reception-optimization system with manual override; 5-varactor/MOS/EFT R-section; fronce-ind design to
minimize IM. Battery-free memory backups, 8preset groups; FM fine tuning in 25 or 50-kHz
steps; direct station access; witchable tuning
tevel and mute; signal-strength meter; Onkyo
cup raino 1.3 dB: alich vol 50 dB narrow; SM
54 dB monor. THO 10; 55; the 26 dB wide, 18

T-450RDS AM/FM/RDS Tuner 30 AM/FM presets. RDS reception; auto reception-optimization system. RDS program search and text display; battery-free memory backup; 6 preset groups; direct station access; auto scan

T-404 AM/FM Tuner
40 AM/FM presets. Features auto reception-opimization system; MOSFET front end. Batteryfree memory backup; 6 preset groups; directstation access; auto scan tuning; Onkyo R-10,
station access; auto scan tuning; Onkyo R-10,
alc-h sel 30 db; SN 7/3 db mono; THD 0,1%;
alc-h sel 30 db; SN 7/3 db mono; THD 0,1%;

ch sep 40 dB. 18 x 3 x 121/4 in; 8 lb.,

PIONEER F-449 AM/FM Tuner

x 3% x 14% in; 11 lb.

36 AM/FM presets. Features digital processing combined with direct FM conversion to L/R audio outputs; RF attenuator. Selectable normal/narrow IF bandwidth; 3-speed search; signal-strength meter; fluorescent display, 16% x 3% x 3% x 285 x 2

QUAD Model 66 FM Tuner

FM4 FM Tuner 8 presets. Designed for use with Quad 34 preamp. Features microprocessor control. Signalstrength display. FM: 50-dB quieting sens 29 dBf; cap ratio 1.5 dB; 5/N 70 dB; THD 0.05%

\$849

ROTEL
RT990 AM/FM Tuner

16 AM/16 FM presets. Features discrete stereo decoder. Preset scan; wide/narrow bandwidth selector; remote control. FM: cap ratio 1 dB;

alt-ch sel 80 dB; S/N 80 dBf mono, 75 dBf stereo; THD 0.05 mono, 0.12 stereo. 17% x 2% x 13 in. \$749

RT950BX AM/FM Tuner

20 AM/FM presets. Features AM-wideband reception. Mono switch; signal-strength indicator, FM: 50-dB quieting sens 14.8 dBf mono, 37.2 dBf stereo; cap ratio 1 dB; alt-ch sel 63 dB; S/N (65 dBf) 80 dB mono, 75 dB stereo. 17% x 2%.

SONY

18% x 3% x 14% in: 9 lb...

x 111/4 in; 8 lb

ST-SSSOES AM/FM Tuner
30 AM/FM presets. Features switchable antenna attenuator. Alphanumeric preset labeling; interstation muting. FM: 30-dB quieting sens 16.8
dBf mono, 38-dBf steree; cap ratio 1 dB wide
S/N 82 dB mono, 38-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 38-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB mono, 36-dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree; cap ratio 1 dB wide
S/N 82 dB steree;



MTX Soundcraftsmen T100

TEAC T-X3000 AM/FM Tuner

Quartz-PLL design with 20 AM/FM presets. Features switchable MPX filter. Auto FM mono/stereo switch; preset scan; seek tuning; fluorescent display, FM: 50.48 quieting services fluorescent display, FM: 50.48 quieting services ratio 1.7 dB stereo; AM rej 65 dB; cgbf, 1,000 Hz) 80 dB mono, 72 dB stereo; ch sep 40 dB at 1,000 Hz, 174 x 34 x 11 in; 61 b...\$220

TECHNICS

ST-G460 AM/FM Tuner Quartz-synthesis design with 39 AM/FM presets. Features MPX filter, wide-band quadrature detector. FM-mode switch: fluorescent display. FM: 50-dB queting sens 38.1 dBf steres AM rej 55 dB; cap ratio 1 dB; alt-ch sel 65 dB; xM 73 dB steres of he sp 50 dB at 1,000 Hz.....\$240

YAMAHA

TX-470 AM/FM Tuner

TX-480 AM/FM Tuner
Direct-PLL IF-count synthesis design with 40 presets. Features aluminum frost panick antivibration feet, rotary encoding; auto FM station memory; 12-segment signal-strength meter; 2-color fluorescent display; Yannaha Es-system remote-control compatibility. FM: S/N 82 dB mono, 76 dB serect ches pt 2 dB. 5199

102 STEREO REVIEW FEBRUARY 1994

ACOUSTIC RESEARCH

Model 30 3-Way Speaker

Two 10-in polypropylene woofers, two 51/4-in polypropylene midranges, 1-in soft-dome tweeter. Power handling 350 W max; crossover points 200 and 2,000 Hz: FR 38-20,000 Hz ±3 dB; sens 88 dB SPL/W/m; imp 4 ohms. 11 x 51½ x 15 in.\$2,500/pr Model 18, As Model 30, one 8-in woofer, Pow-

M5 3-Way Speaker

8-in pulp-paper woofer with filtered suspension. 5-in carbon/mica-filled polypropylene midrange, 1/4-in aluminum-dome tweeter. Black-ash veneer, walnut-veneer, or gloss-black laminate finish ...\$1,080/pr Gray Nextel finish... \$980/pr

M4.5 3-Way Speaker

Two 8-in woofers in isolated subchambers, 1/2in poly-dome fluid-cooled tweeter, Biwire/biamp terminals. Crossover points 65 and 3,800 Hz; FR 47-23,000 Hz -3 dB; sens 88 dB; imp 4 ohms. 91/4 x 36 x 113/4 in ... _\$799/pr

Athena Subwoofer/Satellite System Subwoofer with 8-in dual-voice-coil driver in

filtered suspension enclosure; two satellites, each with 31/2-in midrange and 3/4-in liquidcooled fabric-dome tweeter. Features forced-air subwoofer cooling; magnetically satellite shielding, 40 lb. 6500

Powered Partner 622 Sub/Sat System Filtered-suspension subwoofer with 6-in dual-

voice-coil driver; two acoustic-suspension satellites, each with one 21/2-in driver; 30 W x 1 subwoofer amp, 8 x 2 satellite amp. Features active crossover; magnetic shielding; forced-air cooling. Volume and tone controls. FR 50-20,000 Hz ±3 dB. Subwoofer: 16 x 6 x 121/4 in, Satel-\$349 lite: 31/4 x 51/2 x 31/2 in...

M3 3-Way Speaker

Acoustic-suspension design with 8-in polypropylene woofer, 2½-in midrange, ½-in ferrofluid-cooled dome tweeter. Power handling 125 W; crossover points 1,200 and 7,000 Hz; FR 53-20,000 Hz -3 dB; sens 90 dB SPL/W/m; imp 4 ohms. Charcoal-gray vinyl finish. 91/4 x 21 /2 x 15% in: 23.5 lb. \$300/nr

MC.1 2-Way Center-Channel Speaker 41/2-in woofer. 1/4-in soft-dome tweeter. De-

signed for home theater systems. Features bass radiator, FR 80-20,000 Hz -3 dB; sens 87 dB; imp 6 ohms. 181/4 x 51/4 x 67/4 in ...

A/D/S/ AVT148 3-Way Speaker

One 8-in long-throw woofer, two 4-in midranges, one 1-in soft-dome tweeter. Features magnetic shielding. Bandwidth 30-20,000 Hz; imp 8 ohms. 10½ x 43½ x 16½ in......\$1,500/pr

MS2 Powered Subwoofer

8-in driver long-throw copolymer driver; integral 85-W amp. Features 11/2-in wet-wound OFC-wire voice coil; Kapton former; active crossover. Line- and speaker-level inputs. Selectable high- and low-pass crossover points; auto turn-on. Bandwidth 30-100 Hz. Dark charcoal-gray finish, 171/4 x 117/4 x 14 in

AVS140 2-Way Satellite Speaker 4-in woofer, 4-in passive radiator, 1-in soft-

dome tweeter. Features aluminum cabinet. Includes mounting bracket. Bandwidth 50-23,000 Hz; imp 8 ohms, 41/4 x 13 x 6 in ...

L300e 2-Way Bookshelf Speaker

Acoustic-suspension design with 51/4-in copolymer woofer and 1-in copolymer tweeter. Features aluminum enclosure: 12-dB/oct crossover. Power handling 75 W cont; crossover point 2,000 Hz; FR 60-20,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 4 ohms. Black or white textured

urethane finish. 61/4 x 81/4 x 6 in... AVF144 2-Way Center-Channel Speaker Two 4-in woofers, 1-in soft-dome tweeter, Alu-

minum cabinet includes bracket. Bandwidth 70-23,000 Hz; imp 8 ohms. 41/2 x 13 x 6 in ...\$449/pr C300i/s 2-Way In-Wall Speaker 51/4-in copolymer woofer, 1-in copolymer-dome

tweeter. Features minimum-diffraction baffle. Power handling 100 W cont; crossover point 2,500 Hz: FR 50-20,000 Hz ±3 dB: sens 88 dB: imp 4 ohms. 91/4 x 61/2 x 25/4 in... .\$400/pr

AW4 2-Way Indoor/Outdoor Speaker 4-in woofer, 1-in copolymer-dome tweeter. Brass/stainless-steel hardware: includes mounting bracket. Bandwidth 85-20,000 Hz; imp 4 ohms. White or black, 71/4 x 41/4 x 51/4 in .\$349/pr



Advent Legacy III

ADVENT

Advent Heritage 2-Way Speaker Two 8-in woofers, one 1-in ferrofluid-cooled parabolic-dome tweeter. Features aluminum

woofer coils. Power handling 150 W rms; crossover point 3,500 Hz; FR 42-23,000 Hz ±3 dB; sens 89.5 dB SPL/W/m; imp 8 ohms. Oiled solid-hardwood finish, 101/2 x 371/4 x 13 in:

Advent Legacy III 2-Way Speaker 10-in woofer, 1-in ferrofluid-cooled parabolic

soft-dome tweeter. Features aluminum woofer coil: 18-dB/oct crossover. Switchable impedance. Power handling 100 W cont avg; cross-over point 2,500 Hz; FR 40-23,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 6/8 ohms. Pecan accents. 14 x 32½ x 10½ in: 42 lb\$450/pr

Advent Gallery 2-Way In-Wall Speaker Acoustic-suspension design with 61/2-in woofer,

1/2-in ferrofluid-cooled polycarbonate-dome tweeter. Power handling 50 W cont avg; crossover point 4,500 Hz; FR 60-21,000 Hz ±3 dB; sens 89 dB SPL/W/m; imp 6 ohms. Paintable white finish. 121/4 x 81/4 in...

Mini-Advent Subwoofer III/Satellite System Subwoofer with two 51/4-in drivers: 2 Mini-Advent speakers. Features aluminum subwooferdriver coils. Power handling 75 W cont avg; satellite crossover point 4,500 Hz; FR 50-21,000 Hz ±3 dB; sens 91 dB; imp 8 ohms. Black-ash hardwood subwoofer finish.....

Indoor/Outdoor Mini-Advent II 2-Way Speaker

51/4-in polypropylene woofer, 1/2-in ferrofluidcooled polycarbonate-dome tweeter. Features aluminum voice coil. Power handling 40 W rms; crossover point 4,500 Hz; FR 110-21,000 Hz ±3 dB; sens 88 dB; imp 8 ohms. Black too and base. 61/2 x 11 x 51/4 in; 10 lb.........\$179/pr

Advent Audio Focus

Center-Channel Speaker Two 4-in dual-cone drivers. Features ma shielding. Power handling 70 W rms; FR 80-20,000 Hz ±3 dB; sens 92 dB SPL/W/m; imp 8 ohms. Black textured vinyl finish. 13 x 6 x 51/2 in; 6 lb...

ALLISON ACOUSTICS All models feature a 5-vr warranty.

AL-130 3-Way Speaker

Acoustic-suspension design with two 8-in woofers, one 31/2-in hand-assembled ferrofluidcooled convex-diaphragm midrange, and one 1in silicone-cooled convex-diaphraem tweeter. Features push-pull woofer configuration. Power handling 200 W; crossover points 450 and 4,000 Hz; sens 90 dB; imp 6 ohms. Black-vinyl finish. 121/2 x 371/2 x 141/4 in; 57 lb\$1,200/pr

AL-120 2-Way Speaker

Acoustic-suspension design with two 6-in woofers and one 1-in hand-assembled ferrofluid-cooled convex-dipahragm tweeter. Features push-pull woofer configuration. Power handling 200 W: crossover points 100 and 2,000 Hz: sens 90 dB SPL/W/m; imp 6 ohms. Black-vinyl finish, 111/4 x 237/4 x 111/4 in . \$660/m

AL-115 2-Way Speaker

Acoustic-suspension design with 8-in woofer and 1-in hand-assembled ferrofluid-cooled convex-diaphragm tweeter. Features woofer handtreated with proprietary energy-absorbent com-pound. Power handling 150 W; crossover point 2,000 Hz; sens 90 dB SPL/W/m; imp 6 ohms. 111/4 x 20 x 101/4 in; 22 lb...

The following are for home theater systems and feature a black-lacquer finish. MS-200 2-Way Satellite Speaker 4-in midrange, 1/2-in Mylar-dome tweeter. Fea-tures magnetic shielding. Power handling 50 W

rms; crossover point 140 Hz; bandwidth 90-22,000 Hz; sens 90 dB SPL/W/m; imp 8 ohms. 51/4 x 10 x 51/4 in: 6 lb..

MS-W4 Subwoofer 8-in driver. Power handling 75 W rms; crossover 200 Hz; bandwidth 40-200 Hz; sens

.\$260/or

86; imp 2-8 ohms, 11 x 11 x 11 in: 16 lb\$210 MS-202 Center-Channel Speaker Two 3-in midranges, one 1/2-in Mylar-dome tweeter. Magnetic shielding. Power handling 50

W rms; bandwidth 90-22,000 Hz; sens 86 dB; imp 8 ohms. 19 x 5 x 11 in; 10 lb. STEREO REVIEW FEBRUARY 1994 103

ALTEC LANSING The following feature a 5-vr warranty.

AHT2300 Powered Subwoofer

Multipath design with two 10-in long-throw woven-carbon fiber drivers; 100-W Class B amp. Features THX certification; selectable 18or 24-dB/oct crossover, 100 W x 1 with 0.1% THD; crossover point selectable at 50, 80, 100, or 150 Hz; FR 26-180 Hz ±3 dB. Black, 14½ x 19 x 77 in

Model 508A 3-Way Speaker
Acoustic-suspension design with two 8-in carrbon-fiber core woofers, one 2-in polyimidel/tianium midrange, and one 1-in ferrofluid-cooled
polyimide/tialnium tweeter. Power handling
250 W max; crossover points 750 and 3,500
Hz ±3 dB; sens 90.5 dB
SPL/Wir; imp 6 ohms. Walnut veneer or black
finish 10½ x 40½ x 11 in... \$1,100[pr.

AHT2100 3-Way In-Wall Surround Speaker Two 4-in carbon-filled polypropylene woders, four 3-in carbon-filled polypropylene midranges, and two 7/4-in ferroffluid-cooled polyimide-dome tweeters. Mountable on or inside wall. Features THX certification, Power handling 150 W max; crossover points 180 Hz and 3,000 Hz; bandwidth 80-20,000 Hz; sens 89 dB SPLW/m 154 x 1 x 46/4 in \$5000th

SPL/W/m. 15% x 11 x 6% in.... PSW 10 Powered Subwoofer

Model 96 2-Way Speaker Acoustic-suspension design with two 61/2-in

carbon-filled textured-polypropylene woofers and one 7%-in formed-polyester ferrofluid-cooled dome tweeter. Features butyl-rubber woofer surromedis; 12-dBfcct crossover. Polwer bandling 150 W = x; crossover point 3,500 Hz. FR 39-20,000, n. ± 3 dB; sens 9 l dB SPL/W/m; imp 8 ohms. Black or dark oak vinyl. 8½ x 32 x 92 ker.

AHT2200 Center-Channel Speaker Acoustic-suspension design with two 5%-in carbon-filled polypropylene-cone woofers and

caroon-Hiled potypropytene-cone wooters and two ½-in dome tweeters. Features THX certification; magnetic shielding; fiberglass-filled ABS enclosure; 12-dB/oct crossover. Power handling 150 W max; crossover point 2,500 Hz; sens 89 dB SPL/W/m. Black or white. 7½ x 55/4 x 7 in. \$300

Model 115 2-Way Bookshelf Speaker

Model 66 2-Way Indoor/Outdoor Speaker Acoustic-suspension design with two 6-in carbon-filled polypropylene woofers and one 1/6-in polymind-done tweeter. Features ABS cabinet; magnetic shielding. Power handling 200 W max; crossover point 3,500 Hz; FR 45-20,000 Hz 43 dB; sens 90 dB SPL/W/m; imp 8 ohms. Black or white. 71% x 151/x 7 in. \$200

Ported design with 8-in driver. Features 12-

crossover point 180 Hz; FR 35-250 Hz 23 dB: sens 90 dB SPL/W/m; imp 6 ohms. Black or dark oak vinyl finish. S150 Model 56 2-Way Indoor/Outdoor Speaker Acoustic-suspension design with 594-in carbonfilled polypropylene woofer and 39-in ferroflu-

Model 56 2-Way Indoor/Outdoor Speaker Acoustic-suspension design with 5%-in-carbonfilled polypropylene woofer and ½-in ferrofluid-cooled dome tweeter. Features weatherproof components: engineering-plastic enclosure: 12dB/oct crossover. Power handling. 80 W max; crossover point 4,000 Hz; ER 50-20,000 Hz; ±3

Two carbon-filled polypropylene woofers, ½-in ferrofluid-cooled dome tweeter, Magnetic shielding. Power handling 100 W; bandwidth 80-21,000 Hz; imp 4/8 ohms. 11 x 5 x 7½ in.....590

Model 75 2-Way Bookshelf Speaker Acoustic-suspension design with 5W-in carbonfilled polypropylene woofer and ½-in polymide-dome tweeter. Features magnetic shielding. Power handling 80 W max; crossover point 4,000 Hz; FR 50-20,000 Hz 23 dB: sens 89 dB SPL/W/m; imp 8 ohms. Black or oak viryl finith 6 x 9½ x 6½ in m.

AMC

B1-20 Powered Subwoofer 8-in driver. Features high- and low-frequency

WM100 2-Way Bookshelf Speaker Power handling 100 W max; bandwidth 40-20,000 Hz; imp 8 ohms. 10 x 14 x 3½ in...\$240

APOGEE

Ribbin-Wall 2-Way On-Wall Speaker Hybrid design with 6½-in woofer and 26-in line-source ribbon. Power handling 50 W cont avg; crossover point 1,200 Hz; bandwidth 40-20,000 Hz; imp 6 ohns. Paintable grille. 12 x

Center Channel 2-Way Ribbon Speaker Hybrid design with two 6½-in cone woofers and one 16-in midrange/tweeter ribbon. Power handling 50 W cont avg; crossover point 900 Hz; bandwidth 30-20,000 Hz; sens 115 dB. Paintable metal srille, 23½ x 27 x 6 in ... \$895

ATLANTIC TECHNOLOGY Model 252 PBM Powered Subwoofer

12-in long-throw driver; 40 W x 3 or 90 x 1 amp. Features switchable 80/120-Hz crossover point with 24-dB/oct low-pass slope and 12-dB/ octave high-pass slope. Bass boost; bass and treble controls. \$340 Model 254 SR In/On-Wall Surround Speaker

One 4-in long-throw driver, two 3½-in polypropylene drivers on angled baffle. Retrofit or new-construction mounting kit optional\$299

Model 153 C 2-Way Center-Channel Speaker Two 3½-in polypropylene woofers, ½-in poly-

AUDIO CONCEPTS (ACI) Sapphire IIti 2-Way Bookshelf Speaker

Encore II 2-Way Surround Speaker Dipolar design with 5-in polypropylene woofers in cast frames and ¼-in ferrofluid-cooled textile-dome tweeters. Includes wall-mounting hardware. Power handling 100 W; sens 86 dB: imp 6 ohms. Oak or unfinished chery.5799/pr

AUDIOFILE HOME THEATER

Sub 6.5 A2 Powered Subwoofer
Bass-reflex, biamplified design with two 61/2-

inch drivers. Active crossover with high- and low-pass filters, adjustable from 40-250 Hz. Black-ash finish. 22 x 9 x 14 in; 35 lb\$299 M12.0 3-Way Speaker

112-in bass-reflex woofer, 3-in midrange, and 1-in dome tweeter. Power handling 120 W; bandwidth 50-20,000 Hz; sens 90 dB; imp 8 ohms. Black-ash finish. 14 x 30 x 11 in; 32 lb\$149

AUDIOSOURCE SW3.1 Subwoofer/Satellite System

TV 4.5 Center-Channel Speaker

SW3.1 Subwoofer/Satellite System
Bass-reflex subwoofer with downward-firing

SW8 Subwoofer



Here's what today's music looks like: 0111011000101

the result of engineering breakthroughs you'll never see.

Darn near everything's gone digital.

Except of course, your old speakers. At

Cerwin-Fega, we've designed an entirely

new loudspeaker, for entirely new music.

Introducing the FS. It stands for

"Velocity Sensitive." And means you'll hear

You will, indeed, hear them. Our acoustically loaded woofers will give you deep, accurate bass all the way down to 28Hz.

Along with volume in the neighborhood of 128 decibels (imagine, 128 decibels in your neighborhood). With our large diameter midranges you'll hear clean vocals.

While FS tueetern carry wailing synthe-

every detail in the music. $[\![ext{OR haven't you}\, heard?]\!]$ sizer solos up to 22,000Hz.

From a subtle whiper to a sudden CRASH! This is the These days, it's not just musicians who can make you get result of some extremely fast transient response. Which is up and dance. It's engineers.

12-in dual-voice-coil driver; two LS One satellites. Power handling 150 W; crossover point 150 Hz: bandwidth 25-160 Hz: sens 89 dB SPL/W/m; imp 8 ohms. Matte-black finish \$400 Subwoofer only.

IW-Three 2-Way In-Wall Speaker 8-in woofer, 1-in soft-dome tweeter. Power handling 100 W; sens 92 dB; imp 8 ohms. \$250/pr Mounting depth 31/2 in ..

LS Two/A 2-Way Bookshelf Speaker Acoustic-suspension design with 5-in polypro-

pylene woofer and 1-in ferrofluid-cooled dome tweeter. Magnetic shielding: weatherproof castaluminum enclosure. Power handling 50 W; bandwidth 60-20,000 Hz; sens 89 dB; imp 4 ohms. Black or white, 51/2 x 81/2 x 41/2 in ...\$249/pr

LS Six 2-Way Indoor/Outdoor Speaker 4-in polypropylene woofer, 1-in soft-dome tweeter. Features double-wound aluminum voice coil; metal enclosure. Includes mounting bracket. White or black. \$220/pc

IW-Four In-Wall Subwoofer 8-in driver. Features dual voice coils. Power handling 100 W; crossover 120 Hz; sens 92 dB; imp 8 ohms. Mounting depth 31/2 in

VS1 2-Way Center-Channel Speaker Ported enclosure with two 4-in woofers and 1-in ferrofluid-cooled dome tweeter. Features magnetic shielding; wood-composite enclosure. Power handling 50 W; bandwidth 70-20,000 Hz: sens 93 dB SPL/W/m: imp 8 ohms. Matteblack finish. 5\% x 13\% x 5\% in; 9 lb.......\$119

AUDIRE

Image 1 Ribbon Speaker 9 elements in dipolar configuration; line-sourcearray driver arrangement, bandwidth 30-20,000 Hz; imp 1.9 ohms. 3-yr warranty. Walnut trim. Image 2, As above, 6 elements, bandwidth 35-20,000 Hz. 32 x 72 x 2½ in; 125 lb\$4,500/pr Image 5, As above, 3 elements, bandwidth 40-20.000 Hz. 27 x 72 x 21/2 in; 64 lb\$2,300/pr Image 4. As above, 2 elements, bandwidth 5 20,000 Hz, 24 x 60 x 11/4 in: 50 lb\$1,500/pr

AVID

The following feature a 5-yr warranty.

Model 232CP 3-Way Speaker Bass-reflex design with 10-in polypropylene woofer, 41/2-in midrange, and 1-in soft-dome tweeter. Ferrofluid tweeter and midrange cooling. Power handling 150 W cont; crossover points 650 and 5,000 Hz; FR 40-20,000 Hz -3

dB; sens 90 dB SPL/W/m; imp 8 ohms. 15 x 28 x 10% in Model 80CP 2-Way Speaker Acoustic-suspension design with 8-in polypropylene woofer and 1-in ferrofluid cooled

soft-dome tweeter. Power handling 70 W cont; crossover point 3,000 Hz; FR 53-20,000 Hz +0. -3 dB; sens 88 dB SPL/W/m; imp 8 ohms. 12 x 19½ x 8¾ in...

MOIXA AX 5 3-Way Speaker

10-in woofer, 5-in midrange, 1-in dome tweeter. Crossover points 180 and 3,000 Hz; FR 29-22,000 Hz ±2 dB; sens 87 dB; imp 4 ohms. Dark, natural, or black oak finish. 12 x 38 x 15 in: 50 lb \$1.699/pr AX Subwoofer

10-in driver. Features crossover. FR 29-120 Hz ±3 dB; sens 87 dB; imp 4 ohms. Rosewood or black-oak finish. 15 x 24 x 12 in; 40 lb......\$599

AX 1.5 2-Way Speaker

Tuned-port design with 61/2-in woofer and 1-in dome tweeter. Crossover point 3,500 Hz; FR 45-22,000 Hz ±2 dB; sens 89 dB; imp 6 ohms. Rosewood or black-oak finish, 10 x 20 x 8 in: 18 lb ..

E&W

Matrix 801 Series 3-Way Speaker Vented design with 12-in polymer woofer, 5%in Kevlar midrange, and 1-in metal-dome tweeter. Features 4th-order Butterworth filters: electronic bass-alignment filter. Power handling 600 W: crossover points 380 and 3,000 Hz: FR 20-20,000 Hz ±2 dB; sens 87 dB SPL/W/m; imp 8 ohms. Walnut or black-ash finish. 17 x .\$5.500/pr 39¼ x 22 in; 119 lb...

Matrix 804 3-Way Speaker Bass-reflex design with 61/2-in Cobex-cone woofer, 61/2-in Kevlar bass/midrange, and 1-in ferrofluid-cooled metal-dome tweeter. Features bass-alignment filter. Power handling 200 W; FR 31-20,000 Hz ±2 dB; sens 89 dB SPL/W/m; imp 8 ohms. Black-ash or walnut veneer finish. 101/4 x 367/4 x 101/4 in; 43 lb\$2,200/pr

DM 630i 2-Way Speaker Bass-reflex design with two 71/4-in woofers and

one 1-in metal-dome tweeter. Biwire/biamp terminals. Threaded floor spikes. Power handl 150 W: crossover points 400 and 3,000 Hz: FR 53-20,000 Hz ±2 dB; sens 91 dB SPL/W/m; imp 8 ohms. Simulated walnut or black veneer finish. 91/4 x 331/4 x 157/4 in; 42 lb\$1,100/pr

DM 610i 2-Way Speaker

2nd-order design with 8-in woofer and 1-in tweeter. Biwire/biamp terminals. Power handling 150 W; crossover point 2,500 Hz; FR 70-20,000 Hz ±2 dB. Black veneer finish. 91/4 x 191/4 x 117/6 in: 17 lb... .\$500/pr

Model 2003 2-Way Bookshelf Speaker 61/2-in woofer, 1-in damped-diaphragm dome tweeter. Power handling 100 W; crossover point 3.000 Hz: FR 70-20,000 Hz ±3 dB: sens 89 dB: imp 4 ohms. 81/4 x 161/4 x 91/6 in... \$449/nr

CWM 6 2-Way In-Wall Speaker Acoustic-suspension design with 7-in polypropylene woofer and 1-in metal-dome tweeter. Features auto-reset tweeter-overload protection. Power handling 70 W max; FR 45-20,000 Hz ±3 dB; sens 89 dB SPL/W/m; imp 8 ohms. 8 x 121/2 x 3 in ...

DM 600 IFS Center-Channel Speaker 4th-order vented-box design with two 41/2-in reinforced-polypropylene woofers and one 1-in ted dome tweeter. Power handling 125 W; FR 75-23,000 Hz ±3 dB; sens 88 dB SPL/W/m; imp 8 ohms. 6 x 18 x 9 in..... \$700

BANG & OLUFSEN Beolab Penta III 3-Way Powered Speaker 5-sided bass-reflex enclosure with four 5-in woofers, four 3-in midranges, one 1-in dome tweeter, and 150-W amp. Dynamic clipping attenuator. 3-position bass-level switch; auto turn on/off with Beosystems; source, volume, recording-status, and overload displays. Power handling 150 W rms; crossover points 700 and 5,000 Hz; FR 40-20,000 Hz +4, -8 dB; sens 92 dB SPL/W/m; imp 8 ohms. Brushed stainlesssteel finish. 5 x 65 x 51/4 in... \$3.800/or

Beolah 8000 3-Way Powered Speaker

Bass-reflex design with two 4-in woofers, one 1/4-in ferrofluid-cooled tweeter, and two integral 80 W x 2 amps. Features cone-tipped tubular cabinet finished in anodized aluminum; magnetic shielding; cast-iron base. Power Link socket: line-level input. Includes rubber supports and spikes for base, FR 50-20,000 Hz ±2 dB, Polished and anodized mirror surface. 6 x 52 x 6 in: 44 lb ..\$3,000/pr

Beolab 6000 2-Way Powered Speaker Biamplified bass-reflex design with two 31/2-in woofers molded into baffle in center of cabinet and 34-in neodymium tweeter. Features oval columnar cabinet made of polished aluminum extrusion; proprietary Adaptive Bass Linearization circuitry; 24-dB/oct Linkwitz-Riley active crossover; 30-dB/oct filter at 70-Hz resonance frequency: dome-shaped acoustic port; magnetic driver shielding. Line- and speaker-level inputs; Power Link bus connectors. Crossover point 3,000 Hz; FR 90-20,000 Hz ±2 dB, 4 x 43 x 31/4 in; 14 lb...

RL 6000 2-Way Speaker Bass-reflex design with two 5-in woofers and one 1-in dome tweeter. Power handling 60 W rms; crossover point 3,500 Hz; FR 45-20.000 Hz +4, -8 dB; sens 93 dB SPL/W/m; imp 8 ohms, 211/4 x 16 x 7 in; 20 lb...

IWS 2000 In-Wall Speaker Infinite-buffle design with 51/4-in woofer and 1in polycarbonate-dome tweeter. Mounting space for B&O's Master Control Link transceiver and relay box; magnetic grille attachment; Beolink 7000 or 5000 remote compatibility. Power han-dling 100 W rms; crossover point 2,500 Hz; FR

50-20,000 Hz +3, -8 dB; sens 89 dB SPL/W/m. 14½ x 8 x 3½ in: 5 lb... \$500/pr Beovox CX100 2-Way Bookshelf Speaker Pressure-chamber design with two 4-in woofers

and one 1-in dome tweeter. Power handling 100 W rms; crossover 2,500 Hz; FR 50-20,000 Hz +4, -8 dB; sens 89 dB SPL/W/m; imp 6 ohms. Aluminum, black, white, or gray finish. 41/4 x 12% x 8 in; 11 lb.. \$500/pc

RL 1000 2-Way Bookshelf Speaker Bass-reflex design with 5-in woofer and 15/4-in tweeter. Power handling 35 W rms; crossover point 3,500 Hz; FR 48-20,000 Hz +4, -8 dB; sens 92 dB SPL/W/m; imp 8 ohms, 15% x 12½ x 5 in: 8 lb...

BGW SYSTEMS Model 2200 Powered Subwoofer

4 McCauley 15-in drivers; BGW GTA 1,000-W/ch amp. Features joint development with McCauley Sound; edge-wound voice-coil assemblies; 24-dB/oct low-pass filter; two servocontrolled cooling fans; anti-clipping circuitry. balanced XLR inputs and barrier-strip inputs. Variable input sens; remote turn-on. Power handling 600 W/driver; crossover point selectable at 63, 80, 100, 125, 160, 200, 250, 315, 400, or 500 Hz; imp 4 ohms per driver. 421/4 x 331/4 x \$4,279 31 in..



applications, both acoustically and aesthetically. They employ Celestiondesigned, magnetically-shielded drivers, integrated into elegant cabinets using proprietary construction technologies.

Compare each Celestion Shield model with any comparably priced so-called Home Theater speaker. Immediately, you will realize...



CELESTION

BIC AMERICA

Venturi Realta 3-Way Speaker Mirror-image-pair design with two 10-in polylaminate woofers, two 51/4-in polylaminate midranges, and 1-in titanium-dome tweeter. 5way gold binding posts. Includes floor spikes. 12 x 53½ x 15 in _____S1.199/pr

Venturi V12 Powered Subwoofer

Vented design with 12-in driver; 100 W outboard amplifier. Features vented pole piece, rossover at 85 Hz. Speaker- and line-level inputs and outputs. 161/2 x 21 x 191/4 in\$600 Above without amplifier ..

Venturi V820 2-Way Speaker

Vented design with 8-in woofer and 1-in polylaminate soft-dome tweeter. Horizontal crossbracing, 5-way gold-plated binding posts, Pow-er handling 150 W; crossover point 2,500 Hz; FR 40-22,000 Hz ±3 dB; sens 91 dB SPL/W/m;

Muro M8 2-Way In-Wall Speaker

8-in woofer, 1-in soft-dome tweeter, Power handling 100 W; FR 40-22,000 Hz; sens 90 dB

Venturi V52 Plus 2-Way Center-Channel Speaker

Vented design with two 5%-in polymer-coated long-throw woofers and one 1/2-in ferrofluidcooled polyimide-dome tweeter. Features ma netic shielding. 18 x 61/2 x 101/2 in.....

BOSE

The 01 series and Point Two series feature Bose's patented Direct/Reflecting design.

Model 901 Series VI Speaker

2 speakers, each with 8 front-facing and 1 rearfacing 41/2-in full-range drivers; outboard active EQ. Features pentagonal cabinet; helical voice coils, Midbass, midtreble, and tape-monitor EO controls. Power handling 450 W max; imp 8 ohms. Genuine hardwood veneer with walnut finish. 5-yr warranty. EQ: 13 x 234 x 436 in; 3 Ib. Speaker: 125/4 x 21 x 13 in; 35 lb....\$1,499/pr

Model 201 Series II 2-Way Bookshelf Speaker

Slotted-port design with one 6-in woofer and one 21/4-in ferrofluid-cooled tweeter. Features patented Free Space array driver configuration; dispersion lens; dual-frequency crossover. Power handling 120 W max; imp 8 ohms. Black, white, or woodgrain veneer finish. 5-vr warranty. 73/4 x 141/2 x 9 in...

Point Two Series

Model 10.2 3-Way Speaker 3-chamber dual-port design with 8-in woofer

mounted on internal haffle. 8-in midrange, and two 2-in fluid-cooled angled tweeters. Features tweeter-protection circuitry. Power handling 360 W max; sens 88 dB; imp 8 ohms. Hardwood-veneer finish. 5-yr warranty. 111/4 x 381/4 x 11% in: 46 lb...

Model 6.2 2-Way Bookshelf Speaker Dual-chamber ported design with one 8-in woofer and two 3-in axially mounted tweeters. Features overdrive protection circuitry. Speaker stands optional. Power handling 200 W max; imp 4 ohms. Hardwood-veneer finish. 5-yr warranty, 10 x 20 x 9% in: 20 lb., \$599/pr Acoustimoss Series

Acoustimass 7 Subwoofer/Satellite System Acoustimass subwoofer with two 51/4-in drivers; 3 satellites, each with one 21/2-in driver in each of 2 attached swiveling cubes. Designed for home theater systems. Features double-cube Direct/Reflecting satellite design; magnetic satellite shielding; protection circuitry. Stands and mounting brackets optional. Power handling 100 W max; imp 8 ohms. Black. 5-yr warranty. Subwoofer: 19 x 14 x 7½ in. Satellites: 3½ x 6% x 4¼ in ...

Acoustimass 5 Series II Sub/Sat System Acoustimass subwoofer with two 51/4-in drivers: 2 satellites, each with one 21/5-in driver in each of 2 attached swiveling cubes. Features doublecube Direct/Reflecting satellite design with magnetic shielding, protection circuitry. Stands and mounting brackets optional. Power handling 100 W cont avg. Black or white. 5-yr warranty. Subwoofer: 14 x 71/2 x 19 in. Satellites: 31/4 x 61/4 x 41/4 in...

Acoustimass 4 Subwoofer/Satellite System Acoustimass subwoofer with one 514-in driver: 3 satellite speakers, each with one 21/2-in driver. Designed for home theater systems. Magnetic satellite shielding; protection circuitry. Wall/ ceiling brackets and table/floor stands optional. Power handling 100 W max; imp 4-8 ohms. Black, 5-vr warranty, Subwoofer: 8 x 14 x 8 in.

Satellites: 3 x 3 x 5 in.

Acoustimass 3 Powered Sub/Sat System Acoustimass subwoofer with 51/4-in driver: two satellites, each with two 216-in drivers: 50-W subwoofer amp; two 20-W satellite amps. Features magnetic satellite shielding; subwoofer tone and volume controls. Stands and mounting brackets optional. 5-yr warranty. Black or white. Subwoofer: 181/2 x 71/4 x 81/2 in. Satellites: 41/2 x 41/2 x 31/2 in. Acoustimass 3 Series IL As above without amplifiers. Features protection circuitry. Power handling 50 W cont avg

Other Models RoomMate II Powered Minispeaker

Aerodynamically tuned-port design with 41/2-in full-range driver; integral amp. Designed for personal stereos and portable CD players. Features helical voice coil; AC/DC operation; 2stage active EO: distortion-limiting circuitry. Black. 1-yr warranty. 91/2 x 61/2 x 61/2 in ..\$339/pr

Model 151 Indoor/Outdoor Speaker 41/2-in full-range Kevlar-composite-cone driver. Features weatherproof stainless-steel housing and hardware: weather-resistant components: silicone-coated surround. Power handling 80 W max; imp 4-8 ohms. Black or white. Limited 5-

yr warranty. 6 x 9 x 6 in; 4 lb... Model 100 Bookshelf Speaker 4½-in full-range driver. Sculpted design. Power

handling 80 W max; imp 4-8 ohms. Black or white. Limited transferable 5-yr warranty. 6 x 11 x 6 in; 4 lb... ..\$199/pr

.\$299/pr

BOSTON ACOUSTICS

SubSat7 Subwoofer/Satellite System Subwoofer with two 7-in drivers in sealed and vented chambers; 2 satellites, each with 4-in midrange and 1-in ferrofluid-cooled tweeter. Power handling 125 W; sens 89 dB SPL/W/m; imp 8 ohms. Black or white. Subwoofer: 15 x 19% x 9 in. Satellite: 8½ x 5 x 5¼ in.....

T930 Series II 3-Way Speaker

Acoustic-suspension design with 10-in copolymer woofer, 61/2-in copolymer-cone midrange in subenclosure, and 1-in dome tweeter. Power handling 150 W; crossover points 350 and 2,500 Hz; FR 42-20,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 8 ohms. Woodgrain vinyl and black-ash finish. 101/2 x 361/4 x 12 in\$750/pr

SW-10 Powered Subwoofer

10-in driver in compact vented enclosure; 100-W amp. Features 24-dB/oct active crossover. Auto on/off. Crossover point 95 Hz. Black-ash vinyl finish. 191/2 x 111/4 x 161/4 in......

Model 360 Series II 2-Way In-Wall Speaker 61/2-in copolymer-cone woofer, 1-in ferrofluidcooled soft-dome tweeter. Suitable for marine applications. Features galvanized-steel grille with heat-cured epoxy paint. Gold-plated 5-way binding posts. Includes retrofit mounting bracket. Power handling 60 W rms; FR 58-20,000 Hz ±2 dB; sens 90 dB; imp 8 ohms. 7¼ x 10¼ x 21/4 in...

Voyager 2-Way Outdoor Speaker 51/4-in copolymer woofer, 1-in ferrofluid-cooled

soft-dome tweeter. Features Lexan cabinet; stainless-steel grilles and mounting brackets. Power handling 50 W; crossover point 2,500 Hz; FR 70-20,000 Hz ±3 dB; sens 89 dB SPL/ W/m: imp 8 ohms. Paintable white finish. 10½ x 61/2 x 61/4 in; 6 lb...

CenterSat7 2-Way Center-Channel Speaker 51/4-in copolymer woofer, 51/4-in copolymer passive radiator, and 1-in ferrofluid-cooled dome tweeter. Power handling 125 W; FR 65-20,000 Hz ±3 dB; sens 89 dB SPL/W/m; imp 8 ohms. 6 x 161/4 x 6 in...

HD8 2-Way Speaker 8-in copolymer woofer, 1-in ferrofluid-cooled

soft-dome tweeter. Power handling 75 W: crossover point 3,000 Hz; FR 52-20,000 Hz ±3 dB; sens 90 dB W/m; imp 8 ohms. 111/4 x 181/4 x 73/4 in: 16 lb...

Model 525y 2-Way Center-Channel Speaker 51/4-in copolymer woofer, 51/4-in passive radia tor, 3/4-in dome tweeter. Power handling 125 W: FR 65-20,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 8 ohms. 51/4 x 171/4 x 6 in; 9 lb

Home THX Series The following products feature THX certification and are designed to be used together in a home theater system.

Model 595x Subwoofer

12-in long-throw driver. Designed to extend system's response down to 20 Hz. Power handling 250 W; FR 20-80 Hz ±3 dB; sens 85 dB SPL/W/m: imp 8 ohms, Black or white, 181/2 x 17% x 18% in ...

Model 555x 2-Way Speaker Two 51/4-in copolymer woofers, two 1-in ferrofluid-cooled dome tweeters. Designed for left, center, or right channel in home theater system, Features magnetic shielding. Power handling 150 W; FR 80-20,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 8 ohms. Black or white. 111/4 x 181/4 x 75/4 in ...

Model 575x 2-Way Surround Speaker

Dipole design with one 51/4-in copolymer woofer and two side-mounted 21/2-in midra tweeters. Power handling 150 W; FR 125-

\$300

The Powered Subwoofer That Has The Audio And Video Press Jumping Out Of Their Seats.

DESIGNS BY HENRY KLOSS

A jet roaring in Top Gun. The heavyfooted killer robot in Robocop. A semi hitting concrete after a 20 foot fall in Terminator 2. These are examples of the substantial. very low-frequency effects on the soundtracks of today's movies. Such frequencies are rare in music, and are beyond the capabilities of most speakers designed for music.

The Cambridge SoundWorks Powered Subwoofer by Henry Kloss was created to reproduce those ultra-low, ultra-strong bass signals with the power and impact you would experience in movie theaters with the very best sound systems. It's designed to supplement (not replace) the subwoofer(s) of Ensemble or Ensemble II. It will also work with speakers from other companies.

Remarkable bass performance.

The Powered Subwoofer consists of a heavy duty, 12 inch long-throw acoustic suspension woofer integrated with a 140



Powered Subwoofer



Slave Subwogfer

high-pass, line-level filters for the main and center amplifiers. These filters allow you to keep strong, low frequencies of sound effects out of the front speakers. These signals can cause distortion, even in speakers designed for full-range music.

The Powered Subwoofer's bass performance is simply awesome. It reproduces accurate bass to below 30 Hz. You'll hear soundtracks the way they were meant to be heard. In fact the bass is better than most

Optional "slave" subwoofer. For all-out home theater performance. you can add our optional Slave Sub-

woofer, which is identical to our Powered Subwoofer except that it lacks the amplifier and controls. It uses the amplifier and controls built into the Powered Subwoofer. Amplifier output jumps from 140 to 200 watts when the Slave Subwoofer is connected The combination of the two

speakers can reproduce a 30 Hz signal deanly to a sound pressure level of over 100 dB in a 3 000 cubic foot room! That's enough clean. deep bass for the largest home theaters, and the most demanding listeners. The factory-direct price of the Slave Subwoofer is \$299.

No compromises. No apologies. The combination of our Ensemble spea-

ker system, Center Channel Plus speaker, The Surround rear/side speakers. Powered Subwoofer and Slave Subwoofer (see photo at left) creates a home theater speaker system that we believe is the best of its kind. Although you can spend thousands

more on competing systems, we don't know of any that outperform this \$1,999 package. If you'd like more information, a free catalog or our new booklet, "Getting The Most From Your Dolby Surround System," call our tollfree number any time.

For A Free Catalog, Call 1-800-FOR-HIFE

> We Know How To Make Loudspeakers.



Canada: 1-800-525-4434 Ourside U.S. or Canada: 617-332-5936 1992 Cambridge Sound/Works: (1) Engemble is a registered gadema Cambridge Sound/Works: Prices and specifications solviers to change without motor: (# Available have Full 1992) CIRCLE NO 6 ON READER SERVICE CARD

watt amplifier-all in a high-pressure black laminate cabinet. Its control panel includes a bass level control and an 18dB per octave, four-position electronic crossover frequency selector (to match the subwoofer to your other speakers)

Additionally, an optional electronic crossover* will provide 18 dB per octave, theaters! At the press event when we introduced our Powered Subwoofer, we had startled members of the audio and video press literally "jumping out of their seats" during demonstrations of movie soundtracks. The factory-direct price of the Powered Subwoofer is \$599.

Our Ultimate Home Theater Speaker System onsists of our dual-subwoole rsemble system; our low profile speaker; a pair of our criticals Powered Subwoofer our Slave Subwoofer Ractory-direct price: \$1,999.

20,000 Hz ±3 dB; sens 85 dB SPL/W/m; imp 8 ohms. Black or white. 75/4 x 115/4 x 45/6 in...\$250

BOZAK Symphony II 3-Way Speaker

Patented acoustic-isolation design with two 8-in polypropylene woofers, two 5-in polypropylene midranges, one 1-in titanium-dome tweeter, and one 12-in passive radiator. Biwire/biamp termi-nals. FR 31-20,000 Hz +1, -2 dB; crossover points 225 and 2,000 Hz; sens 92 dB; imp 6

Sonata 3-Way Speaker

Dual-port design with 8-in polypropylene woofer, 5-in polypropylene midrange, and 1-in aluminum-dome tweeter. Polygon-shaped enclo sure. Stand optional. FR 40-20,000 Hz +1. -2 dB; crossovers 300 and 3,000 Hz; sens 90 dB; imp 8 ohms. 19 x 26 x 11 in; 55 lb\$1,400/pr

Model 2 2-Way Speaker

Tuned-port design with 8-in poly-cone woofer and 1-in textile tweeter. Features 12-dB/oct sover. Crossover point 2,200 Hz; FR 45-18,000 Hz ±2 dB; sens 89 dB SPL/W/m; imp 8 ohms. Black oak or walnut vinyl finish, 7 warranty. 11½ x 23¼ x 14 in....\$\$45/pr

CAMBER

Camber 4.5ti 2-Way Speaker Bass-reflex design with two 61/2-in woofers and %-in titanium-dome tweeter. Biwire/biamp terminals. Power handling 200 W cont; FR 40-22,000 Hz ±2 dB; sens 90 dB SPL/W/m; imp 8 ohms, 8 x 36 x 11% in; 55 lb\$1,099/pr Camber 3.5ti. As above, one 81/4-in woofer. Power handling 175 W cont; FR 45-22,000 Hz ±2 dB, 10% x 25 x 11% in: 35.3 lb.......\$899/pr Camber 3.0ti. As Camber 3.5ti. power handling 150 W cont, FR 50-20,000 Hz ±2 dB. 10½ x 20 x 11¾ in.... \$699/pr Camber 2.0ti. As Camber 3.0ti, one 61/2-in woofer. Not biwirable. Power handling 125 W cont: FR 55-20,000 Hz ±2 dB. 9 x 16½ x 11¼ \$599/pr in: 22 lb. Camber 1.0ti. As Camber 2.0ti, power handling 100 W cont; FR 60-20,000 Hz ±3 dB. 8% x 14% x 11% in; 18 lb...

Camber LS Subwoofer

Bass-reflex design with 8-in driver. Optimized for Camber LS1 speaker. Power handling 100 W cont avg; FR 30-120 Hz ±2 dB; sens 89 dB; imp 8 ohms. 91/2 x 24 x 111/2 in; 35 lb.....\$449/pr

CAMBRIDGE PHYSICS The following feature a 5-yr parts-and-labor warranty and an oak finish.

G-66 II 3-Way Speaker

Two 8-in polycone woofers, 3-in dome midrange, 1-in ferrofluid-cooled dome tweeter. Features 24-dB/oct crossover, FR 26-22,500 Hz: crossover points 450 and 4,000 Hz; sens 92.5 dB. 18 x 44 x 12 in; 90 lb... \$1,000

G-11 II 2-Way Speaker 8-in polycone woofer, 1-in ferrofluid-cooled

dome tweeter. Features 12-dB/oct crossover. Power handling 100 W cont; crossover point 1,500 Hz; FR 44-22,500 Hz; sens 90 dB; imp 6 ohms, 12 x 191/2 x 81/2 in: 20 lb....\$400/pr

514-in woofer, 34-in dome tweeter, Features 12-

dB/oct crossover. Power handling 75 W: crossover point 4,200 Hz; sens 88 dB. 8 x 11 x 6 in;



CAMBRIDGE

The following are available only factory-direct.

Ensemble Subwoofer/Satellite System 2 subwoofers, each with one 8-in woofer: 2

satellites, each with one 31/1-in ferrofluid-cooled cone midrange and one 134-in direct radiator with an integral %-in ferrofluid-cooled dome tweeter. Features high-density-particleboard subwoofer cabinet with internal bracing. Power handling 200 W; imp 6 ohms. Black-laminate finish. Subwoofer: 12 x 21 x 4½ in. Satellite: 81/4 x 51/4 x 4 in

Powered Subwoofer System Acoustic-suspension design with 12-in driver

and 140-W amp. Features active crossover with 4 selectable crossover points. Level control. Power handling 140 W max, 151/2 x 261/2 x 91/2

Surround Speaker System 4-in woofer with two 3-in midrange/tweeters

mounted in dipole fashion. Power handling 100 W cont avg; FR 125-10,000 Hz; sens 86 dB SPL/W/m; imp 8 ohms. Available primed for painting or gray.....\$399/pr Surround II Speaker System. As above, pow-er handling 60 W. 4½ x 6½ x 4½ in....\$249/pr

Outdoor 2-Way Speaker Acoustic-suspension design with 51/4-in copoly-

mer woofer and %-in dome tweeter. Water-resistant polypropylene enclosure. Power handling 200 W; imp 8 ohms \$279/pr .\$329/pr In-wall version of above ..

Center Channel Plus 2-Way Speaker

Acoustic-suspension design with four 3-in drivers and one 13/4-in direct-radiator ferrofluidcooled tweeter with %-in integral dome. Designed for home theater system. Features magnetic shielding; 11-element crossover with multiple points: MDF wood-composite enclosure. Support for use as TV base optional. Power handling 100 W; sens 86 dB; imp 8 ohms. Black vinyl finish, 25 x 4 x 61/2 in: 12 lb....\$219

Model Six 2-Way Bookshelf Speaker

Acoustic-suspension design with 8-in longthrow woofer and 11/4-in direct-radiator ferrofluid-cooled tweeter with %-in integral dome. Features 6-element crossover; MDF wood-composite enclosure. Power handling 150 W; cross-over point 2,000 Hz; sens 90 dB; imp 8 ohms. Oak, teak, or black-ash vinyl finish. 111/4 x 181/4 x 7% in: 18 lb.

CANTON

The following feature a limited 5-yr parts-andlabor warranty and a 2-vr electronics warranty for nowered models.

Ergo 80 DC 3-Way Speaker Bass-reflex design with 8-in woofer, 8-in mid-

range, and 1-in tweeter. Power handling 120 W: crossovers 300 and 3,500 Hz; FR 22-30,000 Hz. Gloss black or white finish; custom finish available, 91/2 x 371/2 x 101/2 in; 42 lb...\$3.500/pr

Fonum 701 3-Way Speaker

Bass-reflex design with two 8-in woofers, one 6-in polypropylene midrange, and one 1-in aluminum/manganese-dome tweeter. Power han dling 140 W; crossover points 300 and 3,500 Hz: FR 20-30,000 Hz; sens 89 dB SPL/W/m; imp 4 ohms. Black textured vinyl finish. 9% x 391/2 x 121/4 in; 48 lb...

Karat 930 DC 2-Way Bookshelf Speaker Bass-reflex design with 9-in woofer and 1-in

aluminum/manganese-dome tweeter. Power handling 85 W; crossover point 2,800 Hz; FR 27-30,000 Hz; sens 87 dB SPL/W/m; imp 4 ohms. Oak, walnut, dark cherry, black, or white finish. 101/4 x 17 x 101/4 in; 24 lb\$1,000/pr Karat 920 DC. As above, 8-in woofer. Power handling 70 W; FR 33-30,000 Hz. 9 x 13½ x 8¼ in; 15 lb...

Combi 24 DC Subwoofer/Satellite System Subwoofer with two 8-in drivers; two satellites. each with two 4-in midranges and one 1-in tweeter. Power handling 80 W; crossover points 120 and 2,500 Hz; FR 22-30,000 Hz; sens 88 dB SPL/W/m; imp 4 ohms. Black or white. Subwoofer: 19¼ x 9 x 12½ in; 32 lb. Satellite: 51/4 x 8 x 51/4 in; 5 lb....

Plus C Subwoofer

12-in driver. Power handling 70 W; crossover point 120 Hz; FR 22-120 Hz; sens 88 dB SPL/W/m; imp 4 ohms. Walnut, black, or white finish. 131/2 x 141/4 x 137/6 in; 26 lb...

InWall 6 2-Way In-Wall Speaker

Coaxial design with 6-in woofer and 1/2-in tweeter. Power handling 40 W; crossover point 4,000 Hz; sens 87 dB SPL/W/m; imp 4 ohms. 81/4 x 81/4 x 31/2 in; 3.3 lb ... \$500/pr

Patio 160 2-Way Indoor/Outdoor Minispeaker

61/2-in woofer and 1-in aluminum-manganese dome tweeter. Features weather resistance. Power handling 50 W; crossover point 2,900 Hz: FR 42-30,000 Hz; sens 86 dB SPL/W/m; imp 4 ohms. Black or white, 714 x 1024 x 434

AV-500 2-Way Center-Channel Speaker Bass-reflex design with 4-in woofer and 1-in

tweeter. Designed for home theater system. ower handling 60; crossover point 3,000 Hz; FR 40.30 000 Hz; sens 88 dB SPI /W/m; imp 4 ohms. Black or white, 17 x 51/4 x 61/4 in\$400

Home Theater Speaker Systems. There's A Right Way And A Wrong Way.

We'd like to clear up some misconceptions on the subject of speaker systems for use in Dolby Pro Logic home theater systems.

Misconception #1: You can use any speakers for the surround and center channels

The center channel is very important because a large portion of soundtracks is directed to the center in systems with Pro Logic. That speaker should have smooth frequency response, good power handlingand it must match the tonal balance of the main speakers. Also, a center channel speaker should be magnetically shielded to prevent video interference. Surround speakers should also match

the tonal balance of the front speakers. Indeed, all five speakers should have matching tonal balances for proper sound. But unlike front speakers, surround speakers should create a diffuse sound field. So the best systems with Pro Logic use "dipole radiating" surround speakers (e.g. The Surround II and The Surround speakers in our \$797 and \$1,117 packages).

All the systems on this page consist of speakers designed to match each other tonally. (Identical timbre).

Misconception #2: Use five identical speakers in a system

with Pro Logic. A number of companies have released speaker packages consisting of five matching minispeakers (some with a subwoofer). This ignores the fact that the surround channels serve different purposes than the front channels.

Misconception #3: A good home theater speaker system costs

thousands and thousands of dollars. A number of retailers regularly sell \$10,000 Pro Logic speaker systems. This is just not necessary. We believe that the two more expen-

sive systems on this page compete headon with combinations selling for thousands more, Add our Powered Subwoofer (\$599). and we'll compare them to anything on the market.

Model Six Speakers, Model Ten-A Speakers (3)

\$463 Home Theater Package Features Model Six And Model Ten-A.

Our most affordable speaker package for systems with Pro Logic is centered around the new Model Six two-way acoustic suspension speaker by Henry Kloss. Model Six offers smooth, natural sound over a wide frequency range. The center channel and surround speakers are our new Model Ten-A magnetically shielded two-way acoustic suspen-

sion speakers. Tonally balanced to match Model Six, they are ideal for this affordable system.



our Ensemble satellites. The surround speakers are The Surround II, the most affordable dipole radiating speaker we know of (see previous ad). You could spend thousands more without improving on this package. \$1.117 Home Theater Package

Channel, a magnetically shielded version of

Features Our Best Speakers. This system is built around our dual-

subwoofer Ensemble speaker system (Audio magazine said it "may be the best value in the world"). The center channel speaker is our Center Channel Plus, a unique fivedriver speaker that can be placed above or below your TV monitor. The surround speakers are The Surround, our best dipole

radiating surround speaker. This system, especially when matched with

Ensemble System, Center Channel Plus speaker, The Surround speakers

Ensemble II System, Center Channel speaker. The Surround II speakers

\$797 Home Theater Package Includes Ensemble II. Center Channel & The Surround II.

Our best value Home Theater speaker nackage features our critically acclaimed Ensemble II subwoofer-satellite system. With its natural, balanced sound and powerful subwoofer, it provides the heart of a terrific home theater system. The center channel speaker is our Center

our Powered Subwoofer, delivers awesome sound-far better than most theaters. Cambridge SoundWorks products are

not available in stores. Because we sell factory-direct, eliminating expensive middle-men, you can save thousands of dollars. And our 30-day return policy means you take no risk.

For A FREE Catalog, Call

We Know How To Make Loudspeakers

AMBRIDGE

1-800-367-4434 Fax: 617-332-9229 Canada 1-800-525-4434 Outside U.S. or Canada 617-332-5936

CIRCLE NO 6 ON READER SERVICE CARD

Forum 251 2-Way Bookshelf Speaker Bass-reflex design with 6-in woofer and 1-in tweeter. Power handling 50 W: crossover point 3,200 Hz; bandwidth 42-26,000 Hz; sens 86 dB

SPL/W/m; imp 4 ohms. Black textured vinyl finish, 7% x 11% x 8 in; 9.5 lb



CARVER AL-III 2-Way Speaker

10-in woofer, 48-in full-range ribbon panel. Bass, midrange, and treble controls. Power handling 400 W; crossover point 200 Hz; FR 34-20,000 Hz ±3 dB. Hand-matched solid-oak pan-S1.700/pr els. 141/2 x 721/2 x 161/2 in ..

CELESTION Model 600 Si 2-Way Speaker

Aerolam sealed enclosure with 61/2-in Cobex cast-frame woofer and 11/4-in copper-dome tweeter. Features aluminum honeycomb construction; biwirable crossover. Gray Nextel finish: 15 x 8 x 9 in: 11 lb\$2,099/pr DLP-600. Digital processor for above to reduce amplitude and phase errors. Includes fiber-optic and RCA cables...

Model 9 3-Way Bookshelf Speaker Bass-reflex design with 6-in felted-fiber woof-

er, 4-in midrange, and 1-in titanium-dome tweeter. Black-ash or oak finish; 20 x 8 x 10 in; 17 lb.. \$599/nr

Model 1 2-Way Bookshelf Speaker Bass-reflex design with 4-in felted-fiber woofer and 1-in titanium tweeter. Black-ash or oak fin-

ish; 10 x 6 x 7 in; 8 lb ...

Celestion Shield Series The following feature magnetic shielding and a pray textured finish

\$199/pr

CS-6 2-Way Speaker Bass-reflex design with two 5-in woofers and one 1-in tweeter .\$699/pr

CSW Powered Subwoofer Bandpass design with 8-in woofer and 75-W

\$300 amplifier ...

CS-2 2-Way Bookshelf Speaker Bass-reflex design with two 4-in woofers and \$229/pr

CSC 2-Way Center-Channel Speaker Infinite-baffle design with two 31/2-in woofers and one 1-in tweeter

CS-135 Subwoofer

Dual-cavity vented design with 8-in driver. Designed for Models 1, 3, and 5. Black-ash finish. 7 x 20 x 30 in: 22 lb...

CELLO

Stradivari Master 3-Way Speaker 12-in woofer, four 2-in dome midrange four 34-in dome tweeters. Crossovers 400 and 5,000 Hz; sens 90 dB; imp 4 ohms. Rosewood finish. 17 x 62 x 18 in; 340 lb\$26,000/pr Piano-black finish .. .\$28,000/pr

CERWIN-VEGA The following feature a 5-yr limited warranty.

Q-1 2-Way Speaker

Vented design with 10-in woofer and polyfoam tweeter, Includes bass EO, Power handling 400 W: FR 30-20.000 Hz ±3 dB; sens 100 dB W/m; imp 4 ohms. Walnut veneer finish

VS-100 3-Way Speaker

Bass-reflex design with 10-in woofer, 4-in midrange, and 1-in balanced-drive dome twee er. Power handling 125 W; crossover points 600 and 5,000 Hz; FR 37-20,000 Hz ±3 dB; sens 94 dB SPL/W/m; imp 6 ohms. 12% x 27% x 11% in; 40 lb...

Home Theater Series HT-210C Subwoofer/Center-Channel

Combines subwoofer with two 10-in drivers and center-channel speaker with 61/2-in midrange and 1-in polycarbonate-dome tweeter in one cabinet. Can be used as pedestal for largescreen monitor/receiver. Defeatable passive crossover. Subwoofer: power handling 150 W; FR 38-100 Hz ±3 dB; sens 94 dB; imp 8 ohms. Center channel: power handling 80 W; FR 80-20,000 Hz ±3 dB, 33 x 19 x 20 in ...

HT-S6 2-Way Satellite Speaker 61/2-in midrange, 1-in polycarbonate-dome tweeter. Power handling 80 W; FR 80-20,000 Hz ±3 dB; sens 92 dB SPL/W/m. 81/2 x 113/4 x

HT-CTR 2-Way Center-Channel Speaker Two 61/2-in midranges, one 1-in polycarbonatedome tweeter. Features midrange configuration for 120° dispersion. Power handling 100 W; FR 80-20.000 Hz ±3 dB; sens 94 dB SPL/W/m;

HT-110 Subwoofer 10-in driver. Features die-cast aluminum driver frame; defeatable passive crossover, Power han-

dling 250 W: bandwidth 38-125 Hz: sens 94 dB: imp 8 ohms. 13 x 171/2 x 241/2 in..... Compact Home Theater Series Compact HT-S5 2-Way Satellite Speaker

Vented design with 5-in midrange driver and 1in dome tweeter. Features magnetic shielding. Power handling 60 W; FR 125-20.000 Hz ±2 dB; sens 90 dB SPL/W/m; imp 8 ohms. 91/4 x .\$330/pr 61/2 x 61/4 in.

Compact HT-10D Subwoofer

10-in dual-voice-coil driver. Features 12-dB/oct passive crossover at 125 Hz. Power handling 150 W; FR 38-125 Hz; sens 94 dB; imp 8 ohms, 13 x 181/2 x 161/4 in; 34 lb.

Compact HT-SMC Center-Channel Speaker 4 x 10-in full-range driver. Features magnetic shielding. Power handling 80 W; FR 100-10,000 Hz ±2 dB; sens 91 dB; imp 8 ohms. 6 x 15 v 8 in: 9 lb

CLEMENTS Reference RT-7 2-Way Speaker

Compression-line design with 8-in polypropylene-cone woofer and 7-in direct-inductance planar-ribbon midrange/tweeter. Biwire/biamp terminals. Frequency-tilt control. Power han dling 200 W; crossover point 1,575 Hz; FR 26-40,000 Hz ±3 dB; sens 88 dB SPL/W/m; imp 6.5 ohms. Adjustable spiked feet. Rosewood \$5.595/pr finish. 101/2 x 451/2 x 19 in... Piano-lacquer, mahogany, gray-oak, or white-\$4,995/pr oak finish... Black-oak, oak, or walnut finish... \$3.995/pr

Model 400Si 2-Way Bookshelf Speaker 61/2-in polypropylene-cone woofer, 1-in fer-rofluid-cooled linen-dome tweeter. Power handling 90 W; crossover point 2,500 Hz: FR 40-20,000 Hz ±3 dB; sens 88 dB SPL/W/m; imp 8 \$650/or ohms. Black. 91/2 x 14 x 141/4...

Model 106Di 2-Way Bookshelf Speaker 6-in polypropylene-cone woofer, 1/4-in ferrofluid-cooled poly-dome tweeter. Biwire/biamp terminals. Power handling 80 W; crossover point 3,000; FR 50-20,000 Hz ±3 dB; sens 89 dB; imp 8 ohms, 8 x 131/2 x 91/4 in.....

CLIF DESIGNS KP-708 Subwoofer/Satellite System

Ported subwoofer with 12-in driver; two satellites, each with 4-in midrange and 3/4-in ferrofluid-cooled soft-dome tweeter. Power handling 200 W; FR 33-21,000 Hz ±3 dB; sens 88 dB SPL/ W/m; imp 4 ohms. Subwoofer: 17 x 18 x 171/2 in... \$740 Subwoofer only ... \$449

KR-508 Subwoofer/Satellite System Subwoofer with 8-in dual-voice-coil driver; 2

satellites with 4-in midranges and 1/4-in ferrofluid-cooled polycarbon tweeters. Power handling 150 W; FR 46-21,000 Hz ±3 dB; sens 88 dB; imp 4 ohms. Subwoofer: 12 x 20 x 15 in\$599 Subwoofer only

K-101 2-Way Center-Channel Speaker Two 4½-in drivers, two ¾-in ferrofluid-cooled silk soft-dome tweeters. Power handling 125 W: FR 55-20.000 Hz ±3 dB: sens 91 dB: imp 6 ohms. 2016 x 6 x 716 in.

COUNTERPOINT Clearfield Continental 2-Way Speaker

Controlled-directivity transmission-line design with two 6-in mineral-damped polypropylene woofers, aluminum tweeter. Features monocoque construction; polypropylene capacitors; metal-film resistors; dual voice coils. Gold-plated biwire/biamp terminals. Adjustable woofer Q. Power handling 200 W max; FR 30-25,000 Hz ±3 dB; sens 87 dB; imp 8 ohms. Walnut. light-oak, black-oak, or cherry finish. 18 x 50 x 10 in \$3,595/pr

Mystic 2-Way Bookshelf Speaker

Embassy Subwoofer

DAHLQUIST

DQ-28 3-Way Speaker 8-in polypropylene woofer, 4-in polypropylene midrange, *b-in alloy dome-tweeter. Power handling 200 W; crossover points 470 and 4,000 Hz; bandwidth 37-25,000 Hz 23 dB; sens 91 dB; imp 4 ohms. Rosewood or black trim. 14½

....\$1,400/pr

x 41½ x 12 in; 50 lb..... DQ-16 2-Way Speaker

6-in polycarbon woofer, 74-in alloy-dome tweeter. Power handling 150 W; bandwidth 39-27,000 Hz; sens 89 dB; imp 6 ohms. 14 x 37 x 12 in; 30 lb. \$750/pr

DQ-6ci 2-Way Bookshelf Speaker

...

TimeWindow 7 3-Way Speaker 7-sided staggered transmission-line design with

two 9-in polypropylene woofers, two 6½-in midranges, and three ¾-in hard-dome tweeters. Power handling 500 W cont avg; bandwidth 22-25,000 Hz; sens 92 dB; imp 6 ohms. Glossy black finish. 18½ x 48 x 14 in: 75 lb...\$2,999/or

TimeWindow 3 3-Way Speaker

Folded transmission-line design with 8-in which sold the foliation of the

TimeFrame TF600 3-Way Speaker Mirror-image design with 6½-in woofer, 6½-in coaxially mounted polypropylene midhass. 36-

TimeFrame TF400 Series Two

3-Way Speaker Transmission-line design with two 6½-in mag-

netically shielded cone woofers, one coaxially mounted 1/4-in dome tweeter, and one rear-firing 1/4-in dome tweeter. Features antidiffraction lens. Power handling 150 W cont avg; bandwidth 42-20,000 Hz; sens 92 dB; imp 6 obms. Dark oak or black oak finish. 15 x 38 x 8 in; 31

SUB-710 Powered Subwoofer

6-in active driver, 8-in passive bass-reflex driver, integral 50-W B&K Components amp. Magnetic shielding, Line- and speaker-level inputs. Variable sens. Crossover 100 Hz; bandwidth 32-120 Hz. 9 x 14½ x 19½ in \$300.

CX-07 2-Way Bookshelf Speaker

DEFINITIVE TECHNOLOGY Powerfield 1500 Powered Subwoofer

15-in cast-basket polymer-laminate cone driver. Features butyl-rubber driver surround, variable 24-dB/oct high-pass filter. Variable phase control; level control. Power handling 250 W mrs. bandwidth 15-150 Hz. Piano-black lacquer or natural golden-oak finish. 18 x 20 x 18 in.

BP10 2-Way Speaker

Bipolar radiating design with two 6½-in mineral-filled woofers and two 1-in ferrofinid-cooled dome tweeters. Features Linkwätz-Riley crossover; aluminum voice coil. Bandwidth 20-28,000 Hz; imp 8 ohms. Wood or black-lacque finish. 5-yr warranty. 9 x 42 x 11½ in.....\$550

BP8 2-Way Speaker Two 5½-in cast-basket polypropylene woofers,

C-1 2-Way Center-Channel Speaker Two 51/4-in cast-basket woofers, 1-in soft-dome tweeter. Linkwitz-Riley crossover. Power han-

Bipolar design with two 51/4-in cast-basket

polypropylene-cone woofers and two ¼-in softdome tweeters. Features Link witz-Rileycrossover; low-diffraction grille/baffle interface. Includes wall mounting plate. Power handling 200 W: bundwidth 50; 28,000 Hz; sens-90 dB SPL/W/m; imp 8 ohms. Black or white, 7 x 11 x 7 in

DR7 2-Way Bookshelf Speaker

DENHESEN ESL X Electrostatic Speaker

Phase-correct time-aligned hybrid design with 6½-in woofer and four 3½-in electrostatic tweeters. Features biwning. Power handling 150 W cont avg: FR 70-35,000 Hz ±2.5 dB; sens 89 dB SPL/W/m; imp 8 ohms. Choice finish. 9 x 26 x 12½ in: 40 lb \$1.850

ESL MINI Electrostatic Speaker

Phase-correct time-aligned acoustic-suspension hybrid design with 5-in woofer/midrange and four 3½-in electrostatic tweeters. Features biwiring. Power handling 100 W cont avg; bundwidth 75-35,000 Hz; sens 89 dB; imp 8 ohms. Choice of finish. 7 x 24 x 10 in; 20 lb.....\$1,350

DESIGN ACOUSTICS

DA1000 3-Way Speaker
Vented design with 10-in downward-firing
woofer, two 5-in midbasses, and ½-in sonofoam-treated metallized-polycarbonate dome
tweeter. Features magnetic shielding: ferrofluid
cooling. Power handling 300 W; crossover
power handling 300 W; crossover
between the cooling for the cool

DA900 3-Way Speaker Vented design with 8-in downward-firing woof-

PS₂SW Subwoofer

Vented 10-in carbon-fiber driver, Impregnatedaluminum dual voice coils; high-pass filter. Power handling 200 W; bandwidth 30-130 Hz; sens 89 dB (1 voice coil), 95 dB (2 voice coils); imp 8 ohms. Black-vinyl finish, 5-yr limited warranty, 16½ x 22 x 11 in: 38 lb. ... \$340

PS-24 2-Way Center-Channel Speaker

Vented design with two 4-in woofers and ½-in metallized-polycarbonate dome tweeter. Magnetic shielding. Power handling 75 W; bandwidth 50-20,000 Hz; sens 88 dB. Black vinyl finish. 20 x 5 x 14 in; 19 lb. \$190

DGX AUDIO Digital Deconvolution Audio System

DIGITAL PHASE The following feature patented Acousta-Reed

ported design, spun-titanium ferrofluid-cooled dome tweeters, butyl woofer surrounds, a 24dBloctave crossover, gold-plated 5-way binding posts, and a 5-yr warranty.

AP-2 2-Way Speaker Two 6½-in woofers, 1-in tweeter. Features 2-

AP-1 2-Way Speaker

The magazine on your ear that knocks you on CAR STEREO REVIEW Reviews of the hidlest, state of the art only Version of the Votes and Superior of the Votes of the Votes on Indiabation. Not there is a 2-year of the Votes of the Vote AND REAL PROPERTY OF THE PROPE To be home being of the STEECH REICH, smith being and to be simple. You had a car it come with a radio. contions, so many options, it's easy ey just trying to find components the The territories part of the control NOT COMPLETE THE PROPERTY OF T win at the best process of the body of the substitute of the body outly Systems, college phones, and us brinds you complete less reports. User's

HOT SOUND. COOL PRICE.



YES! Start my subscription to CAR STEREO REVIEW
now. I'll save 60% off the annual single copy cost of \$22.45
and get the lowest rate available anywherel

1 Year (6 big issues) just \$8.97

Name	4204
Address	

☐ Payment enclosed ☐ Bill me

Canadian orders add \$7.00 per year (includes 7% GST); foreign orders add \$7 per year; payment in U.S. funds must accompany order. Please allow 30 to 60 days for delivery of first issue.

Would you like to receive special offers from qualified users of our mailing list?

☐ Yes ☐ No



BUSINESS REPLY MAIL

FIRST CLASS MAIL PERMIT NO. 1257

DULDER, CO

POSTAGE WILL BE PAID BY ADDRESSEE

CAR STEREO REVIEW

P.O. BOX 57316 BOULDER CO 80323-7316 NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES





AP-,5 2-Way Bookshelf Speaker

3-in woofer, 1-in tweeter. Power handling 60 W; FR 35-20,000 Hz ±1.5 dB; sens 81 dB SPL/W/m. Black or honey-oak finish. 9 x 13 x 8½ in; 17 lb...

DUNTECH

Recent D400SBL 3-Way Speaker

Pulse-coherent design with two 12-in woofers, two 7-in midranges, and one 1-in tweeter symmetrically arranged and time aligned on vertical axis. Features acoustic damping; polypropylene canacitors: air-core inductors. Biwire/biamp terminals. Power handling 1,000 W; FR 30-20,000 Hz ±3 dB; sens 90 dB; imp 4 ohms. 14 x 74 x 23 in; 161 lb. \$6.995/nr

Viscount D200SBL 2-Way Speaker Pulse-coherent point-source design with two 61/2-in woofers and one 1-in tweeter. Double

woofer magnet with 3-in aluminum voice coil Biwire/biamp terminals, Power handling 500 W: FR 50-20,000 Hz ±3 dB; sens 91 dB; imp 4 ohms, 11 x 34 x 14 in; 53 lb. \$2.495/or

PCL25 2-Way Bookshelf Speaker

Pulse-coherent point-source design with symmetrical time-aligned matched drivers: two 61/2in woofers, one 1-in dome tweeter; 6-dB/oct crossover. Felt baffle treatment: biwire/bian terminals. Stand optional. FR 52-20,000 Hz ±3 dB: sens 91 dB: imp 4 ohms. Brazilian Rosewood finish. 10 x 24 x 14 in; 44 lb\$1,995/pr

DYNACO

FL-650 2-Way In-Wall Speaker 61/2-in polypropylene woofer, 1-in soft-dome tweeter. Waterproof diaphragms; foam-edge surround. Power handling 100 W: crossover 2,500 Hz; FR 58-20,000 Hz ±3 dB; sens 91 dB; imp 8 ohms. Includes mounting hardware.

Amazing Bass Subwoofer

New-construction bracket optional\$300/pr Bass-reflex design with 8-in driver. Features dual voice coils. Power handling 100 W; crossover 100 Hz: FR 30-120 Hz ±3 dB

A-10 Type II 2-Way Speaker

4-in polypropylene woofer, 1/4-in ferrofluid-cooled titanium-dome tweeter. Power handling 75 W: FR 100-18.000 Hz ±3 dB...\$120/pr AW-1 Indoor/Outdoor 2-Way Speaker

Waterproof polypropylene woofer, hard-dome tweeter. Sealed aluminum enclosure; anodized weather-painted grille. Black or white \$100/pr

ENERGY Model 22.3 2-Way Speaker

Front-vented design with two 61/2-in woofers and 34-in dual-hyperdome tweeter on Spherex baffle. Biwire/biamplification terminals. Adjustable spiked feet. Power handling 150 W cont avg; bandwidth 30-23,000 Hz; sens 87 dB; imp 6 ohms. Oak, black-ash, or black high-gloss finish, 10 x 40 x 16 in: 67 lb.....\$2,000/pr

Model 22.1 2-Way Bookshelf Speaker Front-vented design with 61/2-in quadcentric woofer and %-in dual-hyperdome tweeter on Spherex front baffle. Biwire/biamplification terminals. Power handling 110 W cont avg; FR 40-23.000 Hz: sens 85 dB: imp 6 ohms. Oak. black-ash, or black high-gloss finish. 10 x 16 x 12 in: 27 lb... \$1,000/pr

Model 3.1e 2-Way Bookshelf Speaker Front-vented design featuring 8-in quadcentric

woofer and 34-in tweeter. Power handling 100 W cont avg; FR 40-20,000 Hz ±3 dB; sens 87 dB SPL/W/m; imp 6 ohms. Rosewood or blackash finish. 10 x 19 x 10 in..... \$450/pc Model 2.1e, As above, 61/2-in quadcentric woofer. Power handling 80 W cont avg: FR 45-20,000 Hz ±3 dB; sens 86 dB SPL/W/m. 10 x 16 v 10 in

ESAT-2 2-Way Satellite Speaker Acoustic-suspension design with 41/2-in woofer and 1/4-in cloth-dome tweeter. Designed for home theater systems. Features magnetic shielding; sculpted Spherex baffle. Power han-dling 125 W rms; crossover point 2,500 Hz; FR 140-22,000 Hz ±3 dB; sens 84 dB SPL/W/m;

imp 6 ohms. 5 x 8 x 5 in ... ESUB-2 Energy Subwoofer

6th-order band-pass vented enclosure with 61/2in driver. Designed for home theater systems. Features magnetic shielding. Power handling 125 W rms; crossover point 140 Hz; FR 40-140 Hz ±3 dB; sens 84 dB SPL/W/m. Black-ash vinyl finish. 8 x 12 x 14 in; 18 lb..

ECC-1 Energy Center-Channel Speaker Dual-vented design with two 41/2-in woofers and 1/2-in polycarbonate-dome tweeter on a sloped baffle. Designed for home theater systems. Features magnetic shielding. Power han-dling 100 W rms; crossover point 2,500 Hz; FR 60-22,000 Hz ±3 dB; sens 86 dB SPL/W/m; imp 8 ohms. Black-ash vinvl finish. 6 x 20 x 8

FOSGATE AUDIONICS SD 180 Surround Speaker

Dipole design. Features THX certification. FR 80-18,000 Hz ±2 dB; sens 90 dB SPL/W/m. 14 x 22 x 8½ in: 23 lb. ...\$1.850/pe

FS 400 Subwoofer

14-in driver. FR 20-80 Hz ±3 dB; sens 92 dB; imp 8 ohms. 24 x 24 x 131/2 in; 85 lb

SD 90 THX Dipolar Surround Speaker Dual-drive design. Designed for rooms under 4,000 cubic feet. Sand-pebble black or eggshell color, 14 x 11 x 6 in .



Definitive Technology BP10

FRIED PRODUCTS R/5 3-Way Speaker

Aperiodic design with 10-in polypropylene woofer, 5%-in transmission-line-loaded polypropylene midrange, and I-in dome ferrofluiddamped tweeter. Power handling 200 W cont avg; FR 32-20,000 Hz ±3 dB; sens 90 dB; imp 8 ohms. Walnut, light-oak, or black-ash veneer finish. 12 x 34 x 12½ in; 56 lb...........\$1.495/or

A/5 2-Way Speaker

Aperiodic design with 8-in polypropylene woofer and 1-in dome tweeter. Features multiple-layer damping. Power handling 100 W cont avg; FR 32-20,000 Hz ±3 dB; sens 89 dB SPL/W/m; imp 8 ohms. Black-ash or dark-oak finish. 10 x 34 x 121/2 in...

O/5 2-Way Speaker

\$349/nr

Aperiodic design 8-in polypropylene woofer and 1-in dome tweeter. Features multiple-layer damping. Power handling 100 W cont avg: FR 37-20,000 Hz ±3 dB; sens 89 dB SPL/W/m; imp 8 ohms. Dark-oak or black-ash finish. 10% v 20 v 9 in

Beta V 2-Way Bookshelf Speaker

Aperiodic design with 61/2-in polypropylene woofer and fluid-damped dome tweeter. Features 6-dB/oct crossover. Power handling 100 W: crossover point 3.500 Hz: FR 60-20.000 Hz ±3 dB; sens 89 dB; imp 8 ohms. Black-ash or dark-oak finish. 5-yr limited warranty. 8 x 131/2 x 8 in\$399/or

GENESIS IM-8300FW 3-Way Speaker

8-in polypropylene woofer, 3-in titanium/silicon carbide midrange, and 1-in planar ribbon tweeter. Power handling 400 W max: cross points 560 and 4.100 Hz: FR 44-34.000 Hz: sens 87 dB SPL/W/m; imp 4 ohms. Italian rosewood finish. 75 lb.

Genre I 3-Way Speaker

6½-in poly/Kevlar woofer, 4½-in poly/Kevlar midrange, 1-in ribbon tweeter, FR 45-34,000 Hz ±2 dB. Black-ash or rosewood

Genre II 2-Way Speaker

61/2-in poly/Kevlar woofer, 1-in ribbon tweeter. FR 49-34,000 Hz ±2 dB. Black-ash or rosewood finish

Genre III 2-Way Speaker

6½-in polycarbon woofer, ¼-in titanium-dome tweeter. FR 49-32,000 Hz ±2 dB. Black-ash or rosewood finish...

HARMAN KARDON AVS30 Home Theater System

Two 2-way front satellites; one shielded 2-way center-channel speaker; two rear speakers; two subwoofers. FR 35-20,000 Hz ±3 dB; sens 90 dB. 65 lb...

Model Two 2-Way Speaker Ported design with 6%-in polypropylene woofer

and 34-in polycarbonate tweeter. Designed for frequency-independent dispersion; magnetic shielding, FR 60-20,000 Hz ±3 dB; sens 88 dB SPL/W/m; imp 6 ohms. Black vinyl wrap. 81/2 x Model One 2-Way Bookshelf Speaker

Ported design with 5%-in polypropylene woofer and 1/2-in polycarbonate tweeter. Designed for

frequency-independent dispersion; mag shielding. FR 70-20,000 Hz ±3 dB; sens 87 dB SPL/W/m; imp 6 ohms. Black vinyl wrap. 7 x 121/2 x 61/4 in...

CS5 Center-Channel Speaker Tuned-port design with 2 drivers. Features mag-

netic shielding. Bandwidth 75-20,000 Hz ±3 dB: sens 87 dB SPL/W/m: imp 8 ohms. Black vinyl wrap. 171/2 x 51/2 x 8 in; 18 lb........\$179

HARTLEY

The Reference Tower 2-Way Speaker

Four 61/2-in thermoplastic woofers, four 1-in dome tweeters. Power handling 300 W cont avg: crossover point 3,600 Hz; bandwidth 24-25,000 Hz; imp 4 ohms. Wood cabinet. 171/2 x 44½ x 18 in... .\$1,500/pr Infinite-baffle enclosure. Power handling 300

SW-24 Subwoofer 36 x 501/4 x 22 in: 250 lb ...

W cont avg; FR to 16 Hz ±3 dB; imp 5 ohms. HECO

Libero Subwoofer/Satellite System Bass-reflex subwoofer with two 7-in drivers: 2 satellites, each with 41/4-in midrange and 1/4-in dome tweeter. Features die-cast satellite cabinets. Power handling 60 W cont avg; crossover points 120 and 3,000 Hz; bandwidth 28-30,000 Hz; sens 88 dB SPL/W/m; imp 4 ohms. Black or white. Subwoofer: 22 x 81/4 x 131/4 in. Satellite: 4% x 7¼ x 4% in... 9992 Legato Satellite, As above, satellite only, Power handling 50 W cont avg; crossover point

3,000 Hz; bandwidth 80-30,000 Hz.....\$349/pr HEYBROOK The following feature a limited 5-yr warranty.

Solo 2-Way Bookshelf Speaker

Infinite-baffle design with 61/2-in woofer and metal-dome tweeter. Power handling 75 W: bandwidth 45-24,000 Hz; sens 87 dB; imp 6 ohms. 9 x 16 x 9 in...

Point Five 2-Way Bookshelf Speaker Infinite-baffle design with 61/2-in doped-cone woofer and 1/4-in dome tweeter. Power handling

75 W; bandwidth 50-20,000 Hz; sens 87 dB; imp 6 ohms. 9 x 14 x 9 in

HSU RESEARCH HRSW12V Powered Subwoofer

12-in driver; 100-W rms amp. Cylindrical endtable-style enclosure; 24-dB/oct Class A Linkwitz-Riley crossover; magnetic shielding; spiked feet, Bandwidth 25-90 Hz. Black-ash vinyl finish. 211/2-in high, 23-in diam; 50 lb...

HUGHES

Baser-1 Subwoofer Two 8-in fiber drivers. Features patented Acoustic Piston Chamber to synchronize drivers. Power handling 100 W max; bandwidth 30-80 Hz; sens 88 dB; imp 4 ohms. Gray. 11 x 15 x

\$379

Orb-2 2-Way Satellite Speaker 5-in fiber woofer. 1/4-in silk tweeter. Features patented wide-dispersion baffle for 180° lateral dispersion; ABS enclosure; magnetic shielding. Power handling 100 W max; crossover point 2.000 Hz: FR 55-22.000 Hz ±3 dB; sens 89 dB; imp 4 ohms. Grav. 7 x 10 x 10 in\$319/pr

ICON ACQUISTICS

The following are available factory-direct with a 30-day in-home audition. Prices include shipping and handling.

Icon Parsec II 3-Way Speaker Graphite-impregnated 10-in woofer, 61/2-in polypropylene midrange. 1-in metal-dome

tweeter. Features AudioQuest internal wiring. Power handling 350 W cont avg; crossover points 350 and 1.500 Hz; FR 25-22,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 8 ohms. Walnut, cherry, natural-oak, or black-oak finish. 12 x 47 x 16 in: 98 lb ...\$1,995/pr

Icon Lumen SE 2-Way Bookshelf Speaker 61/2-in polypropylene woofer, 1-in metal-dome tweeter. Power handling 150 W cont avg; cross-over point 1,500 Hz; FR 55-22,000 Hz ±3 dB; sens 90 dB; imp 8 ohms. Walnut, oak, or blackoak finish. 91/2 x 18 x 101/2 in; 26 lb......\$995/pr Icon Lumen. As above, AudioQuest internal wiring.

INFINITY

IRS Epsilon Signature 4-Way Speaker 12-in IMG woofer, planar-magnetic midrange, midbass coupler, two EMIT tweeters. Features servo woofer control; 24-dB/oct crossovers. Tweeter and midrange level controls. Power handling 250 W; crossover points 150, 500, and 3,000 Hz; FR 25-35,000 Hz ±1.5 dB; sens 86 dB; imp 4 ohms. Polished-rosewood or blacklacquer finish. 18 x 59 x 15 in\$10,000/pr

Renaissance 90 4-Way Speaker 10-in IMG dual-voice-coil woofer, 61/2-in IMG midbass, EMIM midrange in transmission-line subenclosure, and EMIT tweeter. Features diecast aluminum woofer frame; inverted woofer dust cap; rounded corners. Gold-plated biampi biwire binding posts. Power handling 400 W rms; crossover points 200, 600, and 3,000 Hz; FR 27-45,000 Hz ±3 dB; sens 87 dB SPL/W/m; imp 4 ohms. Blonde-oak or black-ash finish. 17½ x 49 x 12½ in... \$1,599 Black-lacquer finish. \$1.899

SSW-212 Powered Subwoofer

Two 12-in IMG drivers: 300-W amp. Designed for horizontal, vertical, or corner placement Features servo control; fuse protection. Goldplated line-level inputs; speaker-level inputs Variable level control. Amn output power 300 W x 1 rms; crossover point variable from 40-120 Hz; bandwidth 25-120 Hz. Black-oak vinyl or honey-oak veneer finish. 5-yr transferable warranty, 311/2 x 201/4 x 111/4 in..... SSW-210. As above, 10-in drivers, 250-W amp bandwidth 30-120 Hz. 26 x 18½ x 9½ in \$1.098

Kappa 7.1 3-Way Speaker Ported design with 10-in IMG woofer, polypro

pylene-dome midrange, and EMIT-R tweeter. Features nonparallel sides: rounded front corners; 3-in midrange voice coil; circuit-breaker tweeter protection; adjustable tilting feet. Gold-plated 5-way biwire/biamp binding posts. Midrange and tweeter level controls. Power hanng 250 W rms; crossover points 500 and 4,500 Hz; FR 39-35,000 Hz ±2 dB; sens 89 dB SPL/W/m; imp 6 ohms. Honey- or black-oak finish. 5-yr transferable warranty. 141/2 x 431/4 x 101/4 in... \$799 Kappa 6.1. As above, 8-in woofer. Power handling 200 W rms; FR 45-35,000 Hz ±2 dB. 121/4 x 38 x 91/4 in...

Micro II Subwoofer/Satellite System

Subwoofer has two 61/2-in polypropylene drivers in tuned weather-resistant enclosure with internal port: two cylindrical satellites have 4-in polypropylene woofers, 1/2-in polycarbonate tweeters, magnetic shielding. Subwoofer: power handling 100 W rms; bandwidth 40-150 Hz; sens 90 dB; imp 6 ohms; black-pica finish; 91/4 x 15½ x 15½ in. Satellites: power handling 100 W rms; crossover point 5,000 Hz; bandwidth 150-25,000 Hz: sens 90 dB SPL/W/m; imp 6-8 ohms; black or white finish; 51/2-in diameter x 8-in high Satellite only.

SM 155 3-Way Speaker Ported design with one 15-in woofer, two 41/2-in

midranges, one 1-in tweeter. Features rounded edges; auto-reset circuit breaker. Midrange and tweeter level controls. Power handling 300 W; rossover points 500 and 5,500 Hz; FR 44-25,000 Hz ±3 dB; sens 102 dB SPL/W/m; imp 8 ohms, 1734 x 40 x 121/2 in.,

ERS 840 2-Way In-Wall Speaker 8-in IMG woofer, EMIT-N planar tweeter,

Tweeter level control. Power handling 75 W rms; crossover point 3,800 Hz; FR 50-45,000 Hz ±3 dB; sens 85 dB; imp 4 ohms. 111/4 x 151/2 x 31/4 in.

RS 425 2-Way Speaker

61/2-in IMG woofer, 3/4-in ferrofluid-cooled polypropylene tweeter, 61/2-in IMG passive radiator. Power handling 150 W rms; crossover point 3.100 Hz: FR 58-25.000 Hz ±3 dB: sens 92 dB SPL/W/m; imp 6 ohms. 91/4 x 221/2 x

Kappa Video 2-Way Surround Speaker Tuned cabinet with two 51/4-in IMG woofers. EMIT-R tweeter. Designed for center or rear channel in home theater system. Features magnetic shielding; crossover with polypropylene capacitors and OFC wiring. Gold-plated inputs. Adjustable angle. Wall- and ceiling-mount brackets optional. Power handling 150 W rms; crossover point 4,000 Hz; FR 90-35,000 Hz ±2 dB; sens 89 dB SPL/W/m; imp 6 ohms. Honeyoak veneer with solid-oak end panels or black 814 x 2014 x 614 in...

RS 625 2-Way Speaker

8-in IMG woofer, 1-in ferrofluid-cooled polypropylene tweeter, two 8-in IMG passive radiators. Power handling 200 W rms; crossover point 2,800 Hz; FR 40-25,000 Hz ±3 dB; sens 92 dB SPL/W/m; imp 6 ohms. 101/4 x 371/2 x \$350 RS 525. As above, 61/2-in woofer and passive

Infinitesimal Video 2-Way Center-Channel Speaker

Ported design with two 51/4-in midranges and one EMIT-R tweeter. Power handling 80 W; crossover point 5,000 Hz; FR 100-40,000 Hz ±3 dB; sens 90 dB; imp 6 ohms. Black. 14 x 6 x 5 in.....

JAMO Model 707 3-Way Speaker

Bass-reflex design with two 8-in woofers, two

You need the right tone of voice to say Home Theater

In a movie theater, the speaker you never see is the conter channel. That's because it located directly behind the screen, so dislogue sounds as if it's coming directly from the actor's mouths. Although movie screens have tiny holes in them to allow the soundtrack to pass into the theater, the screen material absorbs as much high frequency information that filmmakers are forced to boost the trable content of the soundtrack. Unfortunately, when a film is transferred to videotape or laserdisc, this high frequency boost remains, resulting in dialogue that is unnaturally harsh and much too'ly from?" for home theater. While most speaker manufacturers design their center channel systems to be acoustically flat—a noble goal, they completely ignore the question of every bright dialogue reproduction.

To overcome this problem, Atlantic Technology's Model 153 C Center Channel Speaker gently rolls off the high frequencies for smooth reproduction of center channel dialogue information. When designing the IS3 C our R&D team spent countless hours listening to a wide variety of film and television sound-tracks. These tests allowed us to operfectly tune the Model IS3 C for extended listening, without the brittle, middirected and harsh sound often associated with center channel budgspeakers. The result is rich, natural sounding vocal reproduction. Simply put, the right tone of voice.

At Atanic Technology, we specialize in home theaser. We listen to our outsomers and to movies with equal excitement, then deliver components that are as much about value as they are about performance. That's why Video Magazine said "In its price ronge, Atlantic Technology is currently very hard—if not impossible—to beat." Call 617-752-8500 and refer to Dept. A for more information and the name of your nearest Atlantic Technology deats.



"Deserve's got nothin' to do with it."

If you can name the movie the above quote is from, the character who said it, and the actor who played the role, you can be entered in a drawing to win our Center Channel Speaker. Send your answers on a postcard to Atlantic Technology, Context Dept. 343 Vanderbile Ave. Norwood MA 02062. Context ends 3/3 1/94

5-in midranges, and one 1-in dome tweeter. Features overload protection. Gold-plated inputs. Twin-alloy spikes; rubber feet. Power handling 200 W cont avg; crossover points 150 and 3,000 Hz; bandwidth 35-20,000 Hz; sens 90 dB SPL/ W/m; imp 8 ohms. Black or mahogany finish. 10 x 41 x 15 in; 51 lb ...

Model 507 3-Way Speaker

Bass-reflex design with two 61/2-in woofers, two 4-in midranges, and one 1-in soft-dome tweeter. Features overload protection, Gold-plated inputs. Power handling 150 W cont; crossovers 150 and 3,000 Hz; bandwidth 40-22,000 Hz ±3 dB; sens 88 dB; imp 8 ohms. Black or ma-hogany finish. 9 x 37 x 4 in; 42 lb\$1,200/pr

Model 477 2-Way Speaker

Bass-reflex design with two 5-in woofers and 1in dome tweeter. Features overload protection; 24k gold-plated terminals. Power handling 100 W cont; crossover 2,500 Hz; bandwidth 40-20,000 Hz; sens 88 dB; imp 8 ohms. Black/mahogany finish. 30 x 71/2 x 11 in; 24 lb\$900/pr

SW-500 Subwoofer/Satellite System

Bass-reflex subwoofer with two 10-in drivers; 2 satellites with 4-in midrange and 3/4-in tweeter. Features dual adjustable subwoofer ports; satellite overload protection. Power handling 140 W cont avg subwoofer, 50 W satellite; crossover points 200 and 3,500 Hz; bandwidth 30-200 Hz subwoofer, 80-20,000 Hz satellite; sens 90 dB; imp 8 ohms. Subwoofer: 21 x 16½ x 13 in; 50

SW 160 Subwoofer

Bass-reflex design with two 61/2-in drivers Power handling 100 W x 2 rms; bandwidth 35-200 Hz. Black or white with smoked-glass top 7½ x 13½ x 19 in; 29 lb.

Atmosphere 2-Way Wall Speaker

Bass-reflex design with 51/4-in woofer and 1-in dome tweeter. Combined with switchable halogen light. Features overload protection. Includes 360°-rotating wall bracket. Power handling 60 W cont avg; crossover point 3,000 Hz; bandwidth 40-20,000 Hz; sens 88 dB; imp 8 ohms Black or white, 101/2 x 141/2 x 7 in; 8 lb......\$399

Indoor/Outdoor II 2-Way On-Wall Speaker Bass-reflex design with two 4-in woofers and 34-in dome tweeter. Features all-weather enclo-

sure. Includes mounting hardware. Power handling 60 W cont; crossover 3,500 Hz; bandwidth 70-20,000 Hz; sens 90 dB; imp 4 ohms. Black or white, 61/4 x 121/2 x 41/2 in ... __\$300/pr

Graphic 2-Way On-Wall Speaker Bass-reflex design with 51/4-in woofer and 1-in

dome tweeter. Overload protection, Power handling 35 W cont avg; crossover 3,000 Hz; bandwidth 40-20,000 Hz; sens 88 dB; imp 8 ohms Smoked-glass enclosure. 15 x 17 x 3 in\$299

Center 100 2-Way Center-Channel Speaker Bass-reflex design with two 4-in woofers, 1-in dome tweeter. Overload protection; aluminum shielded cabinet. Power handling 40 W cont; crossover 3,000 Hz; bandwidth 40-20,000 Hz;

sens 90 dB; imp 8 ohms. 17 x 61/2 x 4 in \$190 Outdoor 2-Way Satellite Speaker

4-in polypropylene woofer, 1/4-in polypropylene-dome tweeter. Water and heat resistant. Power handling 50 W cont avg; crossover point 4,500 Hz; sens 90 dB; imp 8 ohms. Black or white, 51/4 x 71/4 x 31/4 in; 3 lb \$119



JBL Home Theater System

Home Theater System

Two subwoofers with 12-in drivers; 3 satellites; 2 dipole surround speakers. Features THX certification; pure-titanium tweeters with diamond surround; polymer-laminate midbasses and woofers; magnetic shielding. Power handling 100 W. Subwoofer: sens 91 dB; imp 6 ohms 211/2 x 251/4 x 171/4 in; 62 lb. Satellites: sens 87 dB; imp 8 ohms: 171/2 x 10 x 81/2 in; 21 lb. Surround: sens 87 dB; imp 6 ohms; 137/4 x 91/4 x \$3,000 7% in; 16 lb.

L7 4-Way Speaker

12-in aquaplas woofer, 8-in midbass, 5-in mineral-filled polypropylene midrange, 1-in titaniumdome tweeter. Power handling 450 W; bandwidth 30-27,000 Hz; sens 91 dB; imp 6 ohm; Black-ash veneer. 9% x 46 x 17% in; 75 lb ...\$975

L5 4-Way Speaker

8-in woofer, 61/2-in midbass, 5-in mineral-filled polypropylene midrange, 1-in titanium-dome tweeter. Power handling 350 W; bandwidth 35-27,000 Hz; sens 90 dB; imp 6 ohms. Black-ash veneer finish. 9% x 36½ x 13 in; 54 lb\$665

PS100 Powered Subwoofer 10-in driver; 50-W amp. Magnetic shielding; variable crossover. Line- and speaker-level in-

puts. Variable input gain; switchable polarity; auto turn-off. Bandwidth 30-250 Hz. Black vinvl finish, 131/4 x 171/4 x 91/4 in: 32 lb\$549

L3 2-Way Speaker

8-in woofer, 1-in titanium-dome tweeter. Power handling 250 W; bandwidth 35-27,000 Hz; sens 89 dB; imp 8 ohms. Black-ash veneer finish. 91/4 x 321/4 x 12 in; 37 lb...

L1 2-Way Bookshelf Speaker

L1 2-Way booksness speaker 6½-in woofer, 1-in titanium-dome tweeter. Power handling 200 W; bandwidth 47-27,000 Hz; sens 87 dB; imp 8 ohms. Black-ash veneer finish. 8¼ x 15% x 10 in; 17 lb.. J2080 2-Way Bookshelf Speaker

8-in polymer-laminate woofer, 1/2-in titanium dome tweeter. Power handling 125 W; FR 40-23,000 Hz -6 dB; sens 89 dB; imp 8 ohms. Oak vinyl finish. 11 x 22½ x 10 in; 20 lb..

SoundEffects Series SoundEffects Music Two

Subwoofer/Satellite System Subwoofer with 100-W amp; 2 satellites, each with two 31/2-in neodymium midranges and one 1/4-in titanium tweeter. Features magnetic shielding; triple-chambered band-pass subwoofer enclosure designed for corner placement. Integrated satellite brackets

SoundEffects Music One Subwoofer/Satellite System

Two subwoofer, each in dual-chamber band pass enclosure; 2 satellites, each with 31/2-in neodymium midrange and 34-in titanium tweeter. Features magnetic shielding. Integrated satellite brackets. \$860 SoundEffects Magic One. 50 W x 2 bridgeable amplifier, 900-MHz RF transmitter, and receiver to modify Music One into a wireless speaker system.

SoundEffects Movies Two

Surround/Center-Channel System Two surround speakers, each with two 31/2-in neodymium midranges and one 34-in titanium tweeter: 2-way center-channel speaker. Integrated surround brackets...

SoundEffects Movies One

Surround/Center-Channel System 2 surround speakers, each with neodymium driver; center-channel speaker with 31/2-in neodymium midrange and 3/4-in titanium tweeter. Features magnetic center-channel shielding. Integrated brackets for all speakers ...

JENSEN

CS315 3-Way Speaker

Bass-reflex design with 15-in woofer, 5-in cone midrange, and 3-in cone tweeter, Ferrofiuid cooling. Power handling 80 W cont avg; band-width 33-21,000 Hz; sens 94 dB; imp 8 ohms. Oak finish, 171/2 x 34 x 111/4 in: 36 lb \$399/pr

CS312 3-Way Speaker Bass-reflex design with 12-woofer, 5-in cone midrange, and 3-in tweeter. Features ferrofluid cooling. Power handling 60 W cont ave: bandwidth 43-21,000 Hz; sens 91 dB SPL/W/m; imp 8 ohms. Black ash or oak finish. 141/4 x 311/2 x 9¼ in; 29 lb.... \$260/or

JOSEPH AUDIO RM9 2-Way Bookshelf Speaker

8-in polypropylene woofer, 1-in aluminumdome tweeter. Features internal cabinet bracing: Cardas internal wiring: cast woofer basket: dynamic woofer damping. Gold-plated binding posts. Power handling 180 W max; crossover point 2,000 Hz; bandwidth 47-20,000 Hz ±2 dB; sens 89 dB; imp 8 ohms. Light-, dark-, or black-oak finish, 101/2 x 19 x 12 in\$1,199/pr

Reference 4-Way Powered Speaker System

Two subwoofers, each with 18-in driver; two satellites, each with four 8-in midbasses, horn midrange, and horn tweeter; two 750-W mono power amps; preamp; 6-band remote EQ; 4-way \$15,000 active crossover...

Monitor Powered Subwoofer/Satellite

System

Subwoofer with 15-in driver; 2 satellites, each with 8-in midbass, 3-in midrange, and horn tweeter; seven 350-W (into 2 ohms) amps; 7way active crossover. Features time-aligned drivers: protection circuitry, 7 level controls, bandwidth 18-20,000 Hz... ...\$5,500 Above with two subwoofers .\$7,500 S18B-5 Powered Subwoofer Proprietary alignment with 18-in driver: 200-W

amplifier. Features 2-way active crossover with bass/ midbass equalization. Amplifier output 200 W cont avg; bandwidth 20-200 Hz. 8-cu-\$2.500 S15A-5. As above, with 15-in driver. Bandwidth 20-250 Hz....

Model 105/3 4-Way Speaker

Two 8-in woofers joined by force-canceling rod to reduce vibrations in coupled-cavity en closure with 61/2-in port; two 61/2-in midbass drivers. Features 61/2-in Uni-O midrange with %-in soft-dome tweeter in its center; conjugate load-matching network. Biwiring/biamplification terminals. Power handling 300 W cont avg. FR 49-20,000 Hz ±2.5 dB; sens 93 dB SPL/ W/m; imp 4 ohms. Available finished in genuine walnut or black-ash veneer. 11 x 43½ x 16 in: 93 lb .\$3,900/pr

Model 102/2 3-Way Speaker

61/2-in long-throw woofer in coupled-cavity enclosure; Uni-Q driver with 3/4-in soft-dome tweeter in center of 61/2-in polypropylene-cone midrange. Features conjugate load-matching network; magnetic shielding. Power handling 150 W cont avg; FR 50-20,000 Hz ±2.5 dB; sens 89 dB SPL/W/m; imp 4 ohms. Genuine walnut or black-ash veneer finish. 81/2 x 20 x 101/4 in: 24 lb.

Q80 2-Way Speaker

8-in Uni-O driver with 11/2-in polymer-dome tweeter in its core; 8-in passive radiator. Features 1½-in woofer voice coil: ferrofluid cooling. Power handling 125 W; FR 57-20,000 Hz ±3 dB; sens 89 dB; imp 8 ohms ...

K160 2-Way Speaker

8-in woofer, 1-in dome tweeter, 8-in passive radiator. Features 1-in voice coil; ferrofluid cooling. Power handling 125 W; FR 48-20,000 Hz ±3 dB; sens 89 dB; imp 8 ohms. 101/4 x 281/4 x

Model 100 Center-Channel Speaker Vented design with Uni-Q driver featuring 1-in neodymium-dome tweeter in center of 61/2-in. polypropylene-cone woofer. Features magnetic shielding. Power handling 200 W cont avg; FR 70-20.000 Hz ±1 dB: sens 90 dB SPL/W/m imp 6 ohms. Gray veneer finish \$500

K120 2-Way Bookshelf Speaker

61/2-in woofer, 1-in dome tweeter. Features 1-in voice coil; ferrofluid cooling. Power handling 80 W; FR 65-20,000 Hz ±3 dB; sens 87 dB; imp 8 ohms, 81/4 x 131/4 x 91/4 in; 9 lb\$249

KENWOOD

CS-01 Center-Channel Speaker Two 4-in drivers. Features laminated high-density-particleboard enclosure; magnetic shielding. Power handling 80 W max; bandwidth 70-20,000 Hz; sens 90 dB SPL/W/m; imp 8 ohms. Black simulated-woodgrain finish, 171/4 x 45/4 x

12% in; 11.2 lb ... KINERGETICS

SW-150V THX Subwoofer 15-in downward-firing driver: 150-W amplifier with crossover/driver controller. Features THX

Unless otherwise noted, the following feature a Sour limited warranty

SX-9 3-Way Speaker

Tuned-port design with 15-in polymer woofer, 51/4-in cone midrange, 1-in ferrofluid-cooled tweeter; 50-oz barium-ferrite woofer magnet. Power handling 300 W max; crossover points 800 and 3,000 Hz; bandwidth 25-20,000 Hz; sens 94 dB; imp 6 ohms. 18 x 33 x 11 in\$350

SX-7 2-Way Bookshelf Speaker Tuned-port design with 8-in polymer woofer and 1-in ferrofluid-cooled dome tweeter. Power

handling 130 W max; crossover point 1,300 Hz; bandwidth 35-20,000 Hz; sens 87 dB; imp 8 ohms. 1114 x 161/2 x 101/6 in..

Premier 81 2-Way Bookshelf Speaker Tuned-port design with 8-in polymer-fiber cone

woofer, I-in ferrofluid-cooled polymer-dome tweeter. Features 1½-in woofer voice coil; 9-element crossover, Gold-plated 5-way binding posts. Power handling 130 W; crossover 1,300 Hz; bandwidth 30-20,000 Hz; sens 87 dB; imp Premier 61. As above, 61/2-in woofer. Crossover 1,600 Hz; bandwidth 40-20,000 Hz; sens 86 dB: imp 6 ohms, 8% x 13% x 9% in ..\$275/pr

SX-8 3-Way Speaker

Tuned-port design with 12-in polymer woofer, 51/4-in cone midrange, and 1-in dome tweeter. Features 30-oz harium-ferrite woofer magnet. Power handling 200 W max; crossover points 800 and 3,000 Hz: bandwidth 29-20,000 Hz: sens 92 dB; imp 6 ohms. 16 x 30 x 11 in ...\$275

KLIPSCH

Klipschorn 3-Way Speaker Horn-loaded design. Power handling 100 W; FR 35-17,000 Hz ±3 dB; sens 104 dB SPL/

W/m; imp 8 ohms. 311/4 x 52 x 281/2 in; 167 lb. Price depends on finish. ...from \$4,000/pr Chorus II 3-Way Speaker

Vented design with 15-in subwoofer, horn midrange, and horn tweeter. Features built-in riser base. Power handling 100 W; FR 39-20,000 Hz ±3 dB; sens 101 dB SPL/W/m; imp

8 ohms. 18½ x 39 x 15½ in; 89 lb. Price depends on finish. _from \$1,790/pr Forté II 3-Way Speaker

Vented design with 12-in woofer, horn midrange, horn tweeter, and 12-in passive radiator. Features built-in riser base. Power handling 100 W; FR 32-20,000 ±3 dB; sens 99 dB SPL/W/m; imp 8 ohms. 161/2 x 351/4 x 121/4 in; 56 lb. Price depends on finish ..

SW-10 Powered Subwoofer Vented design with 10-in driver and 12-in passive radiator; 100-W amp. Features line-level input/output. 14 x 211/4 x 151/6 in; 43 lb\$749

IW 200 2-Way In-Wall Speaker 61/2-in woofer, horn tweeter. Power handling 75 W: crossover point 2,200 Hz: FR 50-20,000 Hz

±3 dB; sens 93 dB SPL/W/m; imp 8 ohms. 101/4 ..\$540/pr IW 100. As above, power handling 50 W, sens 90 dB SPL/W/m. 101/4 x 14 in \$360/nr

KG-2.2 2-Way Speaker

Vented design with two 61/2-in woofers, horn tweeter. Magnetic shielding optional. Power handling 75 W; crossover point 2,200 Hz; FR 50-20.000 Hz ±3 dB; sens 93 dB SPL/W/m; imp 8 ohms. 91/4 x 191/4 x 91/4 in; 20 lb ...\$450/pr

KV3 2-Way Center-Channel Speaker Horn-loaded design with two 61/2-in woofers

and one 1-in horn tweeter. Features magnetic shielding. Power handling 75 W cont; FR 63-20,000 Hz ±3 dB: sens 95 dB SPL/W/m; imp 8 ohms. 22% x 7% x 7% in; 17 lb......

KOSS

KCS/200 2-Way Speaker 8-in polypropylene woofer, 1-in ferrofluidcooled polyimide-dome tweeter. Power handline 125 W max: FR 40-20,000 ±3 dB: sens 90 dB. 5-yr warranty. 10 x 201/2 x 11 in.. \$339

KCS/100 2-Way Bookshelf Speaker 61/2-in polypropylene woofer, 7/2-in ferrofluidcooled polyimide-dome tweeter. Power han-

dling 100 W max; FR 60-20,000 ±3 dB; sens 86 dB, 5-vr warranty, 81/4 x 15 x 81/2 in... HD/6 Powered Computer Speaker

4-in full-range drivers. Features magnetic shielding; auto turn-on/off; dynamic bass boost; volume controls. Operates on 4 C batteries or 6 volts DC. bandwidth 50-20,000 Hz; sens 105 dB. Off-white. Lifetime guarantee....

LINK

Keltik Aktiv 3-Way Speaker Isobarik design with two woofers, one carbonloaded cone midrange, and one ceramic tweeter. FR 20-20,000 Hz ±1 dB. Walnut or black-ash finish, 10 x 40 x 141/2 in: 121 lb.....

Kaber 3-Way Speaker Two 5-in woofers, 3/4-in tweeter. Features woofers with different resonances and crossover points, Triwire/triamp terminals, Walnut or

black-ash finish.7 x 10 x 35 in; 59 lb...\$2,595/pr Keilidh 2-Way Speaker Two woofers, one ceramic tweeter. FR 50-20,000 Hz ±2 dB. Walnut or black-ash finish. 8

x 33 x 10 in; 37 lb... ...\$1,295/pr

MAGNEPAN MG 3.3/R 3-Way Speaker

628-square-in planar-magnetic woofer, 3 x 57in planar-magnetic midrange, 1/4 x 60-in ribbon tweeter. Power handling 200 W cont ave: crossover points 250 and 1,000 Hz: FR 32-40,000 Hz ±3 dB; sens 85 dB SPL/W/m; imp 4 ohms. 24 x 71 x 13/4 in: 130 lb. ...\$3.000/pr

MG 2.6/R 2-Way Speaker

609-square-in planar-magnetic woofer, planarmagnetic midrange, 1/4 x 40-in ribbon tweeter. Power handling 200 W cont avg: crossover oint 1,000 Hz; FR 37-40,000 Hz ±3 dB; sens 87 dB SPL/W/m; imp 4 ohms. 22 x 71 x 13/4 in; .\$1,950/pr

MG .5/QR 2-Way Speaker

370-square-in planar-magnetic woofer, 11/2 x 40-in quasi-ribbon tweeter. Power handling 50 W cont avg; crossover point 900 Hz; FR 45-22,000 Hz ±3 dB; sens 86 dB SPL/W/m; imp 4

SMGB 2-Way Speaker 370-square-in planar-magnetic woofer, 11/2 x

38-in quasi-ribbon tweeter. Power handling 200 STEREO REVIEW FEBRUARY 1994 119 W max; crossover point 900 Hz; FR 50-22,000 Hz ±3 dB; sens 87 dB; imp 4 ohms...... \$690

M&K SOUND S-100B Satellite Speaker

Two 5-in polypropylene midranges, three 1-in soft-dome tweeters. Midrange and treble balance switches. Glass-head black finish... \$995/nr

S-5000 THX LCR Satellite Speaker

Trapezoidal sealed-box design with two 61/2-in polygropylene woofers and two 1-in open-back transmission-line dome tweeters. Features THX certification: tonal-balance control. FR 80-20,000 Hz ±2 dB; imp 4 ohms. 24 x 12 x 12 in;

S-90 2-Way Bookshelf Speaker

Trapezoidal sealed-box design with 61/2-in polypropylene woofer and 1-in soft-dome tweeter Features tonal-balance control. Oak or black finish. Power handling 200 W; FR 80-20,000\$795/pr Hz ±2 dB. 12 x 12 x 91/4 in; 18 lb ... S-90 TV. With magnetic shielding \$875/nr

MX-5000 THX Powered Subwoofer Sealed-box design with two 12-in shielded drivers and integral 400-W rms amp. Features THX certification: push-null driver configuration. Line- and speaker-level inputs. Level control. Crossover point adjustable from 50-125 Hz; bandwidth 18-125 Hz. Oak or black-oak finish, 231/4 x 151/2 x 26 in; 115 lb......

MX-100 Powered Subwoofer

Acoustic-suspension design with two 12-in drivers and 200-W amp. Features push-pull driver configuration. Level control. Crossover point adjustable from 50-125 Hz; FR 20-125 Hz ±3 dB. Walnut, oak, or black-oak finish. 151/4 x .\$1,295 231/4 x 20 in: 78 lb.

MX-70 Powered Subwoofer

Acoustic-suspension design with two 8-in drivers and 125-W amp. Features push-pull driver configuration. Level control. Crossover point adjustable from 50-125 Hz; FR 25-125 Hz ±3 dB, Glass-bead black finish, 10 x 18 x 13% in: 48 lb..

VX-7 Powered Subwoofer

Acoustic-suspension design with 8-in woofer and 50-W amp, FR 40-125 Hz ±3 dB. Black, 10 x 131/4 x 101/2 in; 25 lb...

JOHN MAROVSKIS Janis System 3a Powered Subwoofer

12-in slot-loaded driver: outboard 50-W amplifier. Level control; variable driver phase. Amplifier output 50 W cont avg with 0.05% THD; crossover point 100 Hz; FR 30-100 Hz ±1 dB; sens 85 SPL/W/m; imp 8 ohms. Finished in Brazilian Monarch rosewood, Coca Bola, American walnut, or white oak veneer. Subwoofer: 18 x 18 x 18 in. Amplifier: 14 x 31/2 x 9 in, 87 lb... \$1,150

MARTIN-LOGAN

Quest Electrostatic Speaker 18 x 48-in curvilinear electrostatic panel mounted atop tuned subwoofer cabinet with 12-in driver. Power handling 200 W cont; crossover point 150 Hz; FR 28-24,000 Hz ±2 dB; sens 90 dB; imp 6 ohms. Various finishes available. 19 x 73 x 18 in \$3.995/pr

Sequel II Electrostatic Speaker 10-in subwoofer in tuned chamber, visually

transparent 1 x 4-ft electrostatic cell. Features 30° horizontal dispersion; in vertical line-source format, Power handling 200 W cont; FR 30-24,000 Hz ±2 dB; sens 89 dB SPL/W/m; imp 6

Aerius Flectrostatic Sneaker

8-in woofer, 91/2 x 40-in curvilinear electrostatic driver. Power handling 200 W cont: crossover point 500 Hz; FR 40-20,000 Hz ±3 dB; sens 89 dB: imp 4 ohms....\$1,995/pr

Logos 3-Way Electrostatic

Center-Channel Speaker 61/2-in woofer, 2 curvilinear electrostatic midrange panels. I-in tweeter in horizontally orient ed enclosure. FR 50-20,000 Hz ±3 dB; sens 90 dB; imp 4 ohms...

MB QUART Quart 1000 3-Way Speaker

Bass-reflex design with 8-in polypropylene woofer, 6½-in polypropylene midrange, and 1in titanium-dome tweeter. Power handling 140 W cont: bandwidth 31-32,000 Hz; sens 89 dB SPL/W/m; imp 4 ohms. Black-ash, white-ash, hand-rubbed walnut, hand-rubbed oak, or rawoak veneer finish: other finishes available, 10% x 391/4 x 111/4 in; 52 lb...

Quart Three 2-Way Speaker

Acoustic-suspension design with two 61/2-in woofers and 1-in titanium-dome tweeter. Features butyl-rubber woofer surrounds: 6-dB/oct crossover at 120 Hz: 18-dB/oct crossover at 2,900 Hz. Includes removable isolation spikes. Power handling 90 W cont avg; bandwidth 33-32.000 Hz; sens 88 dB SPL/W/m; imp 4 ohms. Black. 81/4 x 351/4 x 10 in; 32 lb ...

Quart One 2-Way Bookshelf Speaker Bass-reflex design with 61/1-in woofers and 1-in titanium-dome tweeter. Features butyl-rubber

woofer surround; 12- and 18-dB/oct crossover slopes. Includes removable isolation spikes. Power handling 60 W cont; crossover point 2,800 Hz; bandwidth 49-32,000 Hz; sens 88 dB SPL/W/m; imp 4 ohms. Black. 8½ x 13½ x 9½ \$399/m

Quart 250 2-Way Outdoor Speaker 51/4-in aluminum-cone woofer, 1/2-in polycarbonate-dome tweeter. Features weatherproof-

ing; injection-molded fiberglass-reinforced plastic-resin cabinet; butvl-rubber woofer surround: 12- and 18-dB/octave crossover slopes Power handling 50 W cont; crossover point 3.200 Hz: bandwidth 78-22.000 Hz: sens 88 dB SPL/W/m; imp 4 ohms. Black or white. 71/4 x 9½ x 3½ in \$329/pr

Quart 80M In-Wall Speaker

51/4-in aluminum-cone woofer, 1/2-in polycarbonate-dome tweeter. Designed to fit in standard stud wall. Bandwidth 63-30,000 Hz. Paintable, 61/4 x 81/4 x 3 in; 7 lb., ..\$329/pr

MCINTOSH

LS-330 2-Way Speaker Infinite-baffle design with two 8-in woofers and one 1-in aluminum-dome tweeter. Power han dling 300 W max; crossover point 3,500 Hz; FR 55-22,000 Hz ±2 dB; sens 88 dB SPL/W/m; imp 4 ohms. Walnut or black-ash finish. 13 x 36 x 12 in; 61 lb \$2,000/pr

HT-3F 2-Way Surround Speaker

Infinite-baffle dipole design with two 5-in woofers and two 1-in aluminum-dome tweeters Features THX certification; neodymium ironboron magnets. Power handling 150 W max; crossover point 1,500 Hz; FR 85-12,000 Hz; imp 4 ohms. Textured black finish. 16 x 16 x 6 in: 20 lb. \$2,000/4

HT-2 Subwoofer

Vented design with two 12-in drivers. Features THX certification. Power handling 600 W max; crossover point 200 Hz; FR 42-200 Hz ±2 dB sens 91 dB SPL/W/m; imp 4 ohms. Walnut or black-ash finish. 30 x 21 x 20 in; 90 lb....\$1,500

HT-1 2-Way Speaker Infinite-baffle design with two 8-in woofers and

three 1-in aluminum-dome tweeters. Features THX certification; neodymium iron-boron magnet. Power handling 300 W max; crossover point 1,400 Hz; FR 55-22,000 Hz ±1.2 dB; sens 89 dB SPL/W/m: imp 4 ohms. Walnut or blackash finish. 17 x 23 x 11 in: 43 lb........................\$1.000

WS200 2-Way In-Wall Speaker

Infinite-baffle design with 6-in woofer and 1-in dome tweeter. Features solid-state current protection. Power handling 80 W max; crossover point 1,300 Hz; FR 60-20,000 Hz; sens 86 dB; imp 8 ohms, 9 x 12 x 3 in; 7 lb \$600/~

MEMOREX

WM-500 2-Way Outdoor Speaker Acoustic-suspension design with 51/4-in woofer and 1-in dome tweeter. Features aluminum cah inet. Crossover 2,400 Hz; bandwidth 49-20,000 Hz; imp 8 ohms. 6 x 7 x 8 in; 9.5 lb\$249/pr

MERIDIAN D6000 3-Way Digital Powered Speaker

Four 8-in drivers in one sealed enclosure; 61/2-in midrange and 1-in aluminum-dome tweeter in second enclosure: four 75-W amps: digital signal processor. Features three 1-bit D/A converters; silver tweeter voice-coil wiring; proprietary PLL digital-input circuitry. 2 coaxial and 2 fiber-optic digital inputs. Digital crossover, tone control, and time and frequency EQ functions; LED display for CD track/time, volume level tuning/preset information from Meridian 204 tuner; remote control, Bandwidth 20-20,000 Hz. Black-lacquer finish...

DSP5000 2-Way Digital Powered Speaker Acoustic-reflex design with two 61/2-in long throw polypropylene woofers and one 1-

horn-loaded aluminum-dome tweeter; three 70-W amplifiers, Features DSP: 18-bit delta-sigma D/A converter; twin-PLL digital input receiver. 2 digital inputs. Room-position correction for free standing or wall mounting; tone-setting presets: absolute-phase selection: balance, tone, mute, and volume controls; display for source, volume, CD track and time, and tuner preset; remote control. Crossover point 2,600 Hz; FR 34-20,000 Hz ±3 dB at 44.1 or 48 kHz. 83/4 x 351/2 x 111/4 in. Rosewood finish...... ..\$5,240/pr

D5000 3-Way Digital Powered Speaker Vented triamplified design with 61/2-in woofer, 61/2-in midbass, and 1-in metal-dome tweeter; three 65-W amps; preamplifier with 2 digital innuts. Display for source information when connected to 200 Series components; frequency shaping and tilt controls; remote control. Band width 34-20,000 Hz; sens 110 dB. Rosewood finish. 81/4 x 351/2 x 111/4 in .\$5,240/pr Above with black-ash finish ... \$4,990/pr M60 MkII. As above without digital processor, preamp, or display. Rosewood finish...\$3,245/pr

M30 MkII 2-Way Powered Speaker

Vented biamplified design with 61/2-in midbass driver. 1-in metal-dome tweeter; two 70-W internal amps. Features PVC woofer surrounds; balanced and unbalanced inputs; auto turn-on. Bandwidth 40-20,000 Hz; sens 106 dB, Black-



MIRAGE

M5si 2-Way Speaker

Bipolar design; two 6½-in carbon-filled polypropylene woofers with 1-in voice coils and two //-in cloth-dome tweeters. Biwire/ biamp terminals. Power handling 175 W cont: crossover 2.200 Hz: FR 35-20,000 Hz ±2 dB; sens 85 dB; imp 4 ohms, 16 x 44 x 8 in; 75 lb\$1,800/pr

M-1090i 2-Way Speaker

Bipolar design; two 61/2-in polypropylene woofers and two 1-in titanium tweeters. Features rubber woofer surrounds; cloth tweeter suspension; biwiring/biamplification terminals. Power handling 175 W cont avg; crossover point 2,000 Hz: FR 35-22,000 Hz ±3 dB; sens 88 dB SPL/ W/m; imp 6 ohms. Glossy finish. 12 x 42 x 9 in; 70 lb., \$1,100/pr

M-890i 2-Way Speaker

Bipolar design; two 8-in polypropylene woofer and 1-in titanium tweeters. Features rubber woofer surrounds; cloth tweeter suspension; biwiring/biamplification terminals. Power handling 150 W cont avg; crossovers 500 and 2,000 Hz; FR 38-22,000 Hz ±3 dB; sens 87 dB SPL/W/m; imp 6 ohms. Glossy finish. 10 x 39 x

11 in; 60 lb.\$1,100/pr PS-12-180 Powered Subwoofer

Vented dynamic design with 12-in forward-ra-diating woofer, 180 W x 1 cont avg amp. Features overload protection circuit; integrated Class A/B amplification; variable low-pass filter, FR 25-150 Hz ±3 dB, Black-ash vinvl finish. 17 x 18 x 19 in . PS-12-90. As above, 90-W amp. FR 28-150 Hz ±3 dB, 17 x 16 x 17 in.

M-290 2-Way Bookshelf Speaker Front-vented design with 6½-in polypropylene

woofer and 1-in titanium tweeter. Features rubber woofer surround; cloth tweeter suspension Power handling 100 W cont; bandwidth 45-22,000 Hz; imp 6 ohms. Black-ash vinyl finish. 9 x 16 x 9 in; 17 lb...

M-190i 2-Way Bookshelf Speaker Rear-vented design with 61/2-in injected-molded

woofer and 1/4-in titanium-dome tweeter. Power handling 100 W; crossover point 2,300 Hz; FR 48-23,000 Hz ±3 dB; sens 87.5 dB SPL/W/m; imp 6 ohms. Black-ash or white finish, 8 x 14 x

Mirage 2-Way Center-Channel Speaker Dual-vented design with two 41/2-in woofers and 1/2-in polycarbonate flared-dome tweeter. Features magnetic shielding; angled enclosure Power handling 100 W cont; crossover 2,500 Hz; FR 60-22,000 Hz ±3 dB; sens 86 dB; imp 8 ohms. Black-ash vinyl finish. 6 x 20 x 8 in;

MISSION

Cyrus 753 3-Way Speaker

Two 51/4-in plastiflexed paper woofers, two 51/4in midbasses, and one 1-in ferrofluid-cooled dome tweeter. Features viscoelastically damped construction; hard-wired crossover; split crossover network. Gold-plated 5-way binding posts. Crossover points 200 Hz and 2,300 Hz: FR 70-20,000 ±1.5 dB; sens 90 dB SPL/W/m; imp 6 ohms. Black/white-lacquer or wood-veneer finish. 814 x 341/2 x 123/1 in...\$1,499/pr

Cyrus 752 2-Way Speaker

61/2-in woofer, 1-in ferrofluid-cooled polypro pylene/aluminum-laminated dome tweeter. Features transverse-folded cabinet with viscoelastically damped walls; edge-wound Kapton woofer voice coil. Gold-plated 5-way binding posts. Crossover point 3,100 Hz; FR 70-20,000 Hz ±1.25 dB; sens 91 dB. Black-ash or rosewood-veneer finish, 8 x 33 x 10 in\$999/pr

Model 763i 2-Way Speaker

Bass-reflex design with 81/4-in polypropylene woofer and %-in ferrofluid-cooled fabric-dome tweeter. Features 11/2-in woofer voice coil: polyurethane foam wadding; polyester fiber damping; high-density particleboard braced cabinet. 5-way biamp/biwire binding posts. Crossover point 2,800 Hz; FR 70-20,000 Hz ±2 dB; sens 92 dB. Black-ash finish. 10 x 31 x 111/4 in...

Model 762i 2-Way Speaker Bass-reflex design with 81/4-in polypropylene

woofer and %-in ferrofluid-cooled fabric-dome tweeter. Features 11/2-in voice coil; polyurethane-foam damping; high-density-particleboard enclosure: Inverted Drive unit geometry for optimum dispersion at crossover frequency. 5-way binding posts. Crossover point 2,800 Hz; FR 70-20,000 Hz ±2.5 dB; sens 92 dB. Blackash finish. 10 x 19 x 111/4 in . \$400

Model 760i 2-Way Bookshelf Speaker 514-in plastiflex woofer, 14-in polymer-dome tweeter. Mineral-loaded polypropylene baffle.

Power handling 75 W cont avg; crossover point 3,500 Hz; FR 80-20,000 Hz ±3 dB; imp 8 ohms. Black-ash or rosewood-veneer finish, 71/2 x 11½ x 8 in ... Model 76C 2-Way Center-Channel Speake

Bass-reflex design with two 51/4-in plastiflexed paper woofers and 34-in ferrofluid-cooled polyimide-dome tweeter. Features magnetic shielding; high-density-particleboard enclosure; polyester-fiber damping; long-throw voice coil. 5-way binding posts. Crossover point 2,900 Hz; FR 70-20,000 Hz ±2.5 dB; sens 89 dB. Blackash finish. 17 x 61/2 x 101/1 in...

MONITOR AUDIO Studio 50 3-Way Speaker

Acoustic-suspension design with two 6-in anodized aluminum/magnesium ceramic woofers, one 6-in anodized aluminum/magnesium ceramic midrange, and one 1-in aluminum/magnesium anodized-gold dome tweeter. Features 6-dB/oct crossover. Gold-plated 5-way biwire, biamp binding posts. Power handling 300 W; FR 25-30,000 Hz ±3 dB; sens 89 dB; imp 8 ohms. 8 x 41 x 12 in...

Studio 20SE 2-Way Speaker 6-in anodized aluminum/magnesium ceramic

woofer, 1-in aluminum/magnesium anodizedgold dome tweeter. Features mass loading cor partment. Power handling 220 W; FR 30-30,000 Hz ±3 dB; sens 88.5 dB; imp 8 ohms. 8 x 36 x 10 in ... \$4.499/nr

Studio 6 2-Way Bookshelf Speaker Bass-reflex design with 6-in anodized alumi

num/magnesium ceramic woofer and 1-in aluminum/magnesium anodized-gold dome tweeter. Dual front tuned ports. Power handling 200 W; FR 40-30,000 Hz ±3 dB; sens 88.5 dB; imp 8 ohms. 81/2 x 131/4 x 10 in\$2,499/pe

MA700 Gold MkII

2-Way Bookshelf Speaker Bass-reflex design with 61/2-in polypropylene woofer and 1-in aluminum/magnesium ano dized-gold dome tweeter. Features damped cabinet. S-way biwire/biamp binding posts. Power handling 150 W; FR 45-30,000 Hz ±3 dB; sens 89 dB; imp 8 ohms. Black-ash, rosewood, or

Center Channel 200

walnut finish. 81/2 x 137/6 x 10 in\$999/pt Two 41/2-in doped woofers, 3/4-in aluminum/ magnesium anodized-gold dome tweeter. Magnetic shielding; 5-way binding posts. Power handling 100 W; bandwidth 50-24,000 Hz; sens 91 dB; imp 8 ohms. Hand-rubbed black-lacquer or rosewood finish. 17 x 6 x 61/2 in.....

AAL PSW100B Powered Subwoofer Bass-reflex design with 12-in treated-fiber dri-

ver and 100-W amp. Features 2-in voice coil: poly-ether foam surround: low-pass crossover variable from 50-150 Hz; high-pass crossover for satellite output selectable at 50, 100, or 150 Hz. Line/speaker-level inputs. Variable output gain; phase-reversal switch, bandwidth 38-150 Hz. 1-yr warranty. 1614 x 18 x 1814 in......\$400

AAL 1030 3-Way Speaker

Vented design with 10-in treated-fiber woofer, 5-in sealed-back ferrofluid-cooled midrange, 2 x 5-in horn-loaded quartz tweeter. Features 1½-in woofer voice coil. Power handling 75 W rms; bandwidth 55-22,000 Hz; sens 92 dB; imp 4 ohms, 15 x 24 x 101/2 in ... \$360/pr

Model 820 2-Way In-Wall Speaker

8-in polypropylene woofer, soft-dome tweeter. Power handling 50 W rms; bandwidth 40-20,000 Hz; sens 90 dB; imp 8 ohms. Paintable. 10 x 14 x 356 in... \$250/pr

AAL 830 3-Way Bookshelf Speaker Vented design with 8-in treated-fiber woofer, 3-

in sealed-back ferrofluid-cooled midrange, and 2 x 5-in horn-loaded quartz tweeter. Features 1in woofer voice coil. Power handling 50 W rms; bandwidth 75-22,000 Hz; sens 91 dB; imp 4 ohms, 111/4 x 181/2 x 8 in ... \$230/pr

AAL620 2-Way Bookshelf Speaker Vented design with 6-in treated-fiber woofer

and 2 x 5-in horn-loaded quartz tweeter. Features magnetic shielding. 1-in woofer voice coil. Power handling 38 W ms; bandwidth 90-22,000 Hz; sens 90 dB SPL/W/m; imp 8 ohms. 9% x 12% x 7 in.

AAL 525SB 2-Way Center-Channel Speaker Acoustic-suspension design with two 51/4-in treated-fiber woofers and one 2 x 5-in hornloaded quartz tweeter. Features magnetic shielding. Power handling 50 W rms; bandwidth 100-22,000 Hz; sens 91 dB SPL/W/m; imp 8 ohms. 71/4 x 16 x 71/4 in\$120/pr

MUSEATEX

Melior WAL-1 In-Wall Speaker

Dipole planar design. Features real-time rippleeffect technology. Power handling 100 W max; FR 60-20,000 Hz ±3 dB; sens 83 dB SPL/W/m; imp 4 ohms. Paintable white frame and grille. 5-vr warranty.

NAIM

NA SBL 2-Way Speaker

8-in woofer, 34-in dome tweeter. Features external detachable crossover; decoupled tweeter. Includes stand. Power handling 75 W max; FR 30-20,000 Hz ±3 dB; sens 88 dB SPL/W/m; imp 6 ohms. Black-ash or walnut finish. 101/4 x 341/2 x 101/2 in... ..\$3,495/pr

NA IBL 2-Way Speaker

5-in woofer, 34-in dome tweeter. Features de-

tachable crossover. Power handling 65 W max; FR 45-20,000 Hz ±3 dB; sens 86,5 dB SPL/ W/m; imp 6 ohms. Black-ash or walnut finish 9¼ x 31¼ x 10½ in. ..\$1,695/pr

HEAR M-Series speakers feature a 10-yr warranty.

NEAR-50ME 3-Way Speaker Tuned-port design with 8-in metal-cone woofer,

4-in metal-alloy midrange, and 11/6-in metalcone tweeter. Power handling 250 W max; crossover points 235 and 4,000 Hz; FR 30-23.000 Hz ±1.5 dB; sens 91 dB SPL/W/m; imp 8 ohms. 8-layer black-gloss finish. 10½ x 48 x 12 in; 55 lb .. .\$3,290/pr

NEAR-40ME 2-Way Speaker Tuned-port design with 8-in metal-cone woofer

and 1-in metal-cone tweeter. Power handling 150 W max; crossover point 1,800 Hz; FR 32-23,000 Hz ±2 dB; sens 88 dB SPL/W/m; imp 8 ohms. Walnut, oak, or black-oak finish. 10½ x 35 x 101/4 in; 40 lb...

NEAR Sound-Mast 2-Way Speaker

Two 51/4-in metal-alloy woofers, 1-in metalcone tweeter. Features ferrofluid cooling. Power handling 150 W max; crossover point 3,000 Hz; bandwidth 37-26,000 Hz; sens 89 dB SPL/ W/m; imp 6 ohms. Dupont Corian finish. 61/4 x 49 x 8 in: 46 lb

NEAR-10M 2-Way Bookshelf Speaker Ported design with 51/4-in metal-cone woofer and 1-in metal-cone tweeter. Power handling 100 W max; crossover point 3,100 Hz; FR 48-23,000 Hz ±2.5 dB; sens 88.5 dB SPL/W/m;

Black-oak finish with vinvl laminate.....\$399/pr

Model 3.3 4-Way Speaker

Acoustic-suspension design with 12-in polymer woofer, 61/2-in polymer midbass, 41/2-in polymer midrange, and 1-in ferrofluid-cooled metaldome tweeter. Focused image geometry. Power handling 400 W max; FR 23-26,000 Hz ±2 dB; sens 87 dB SPL/W/m; imp 10 ohms. Various finishes, 7 x 41 x 32 in; 123 lb..... \$4,000/or

SW2P Powered Subwoofer

Vented design with 10-in driver; separate MA-1 80 W x I amp. Amp features bypassable crossover: line- and speaker-level inputs; crossover point selectable at 50, 80, or 110 Hz. FR 21-200 Hz ±3 dB, High-gloss black-lamin finish, 16 x 16 x 16 in: 51 lb

VT-1 2-Way Speaker

Tuned column-loaded design with two 41/2-in woofers and one 1-in ferrofluid-cooled softdome tweeter. Features magnetic shielding. Includes base. Power handling 120 W max; FR 65-21,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 8 ohms. High-gloss black or white finish. 51/2 x 40 x 51/2 in; 24 lb..... VT-1C. As above, center-channel speaker. FR 95-21,000 Hz ±3 dB. High-gloss black or white laminate finish, 51/2 x 22 x 9 in: 16 lb

Model 1.1 2-Way Bookshelf Speaker 61/2-in acoustic-suspension woofer and 1-in flu-

id-cooled dome tweeter. Features magnetic shielding. Power handling 150 W max: FR 63-25.000 Hz ±3 dB; sens 88 dB SPL/W/m; imp 8 ohms. Black-laminate, white-laminate, or oakveneer finish. 7 x 12 x 101/2 in; 11 lb\$380/pr

HDP-1 2-Way Surround Speaker

Sealed hybrid dipolar design with 41/2-in woofer and two 3-in tweeters. Includes wall-mount bracket. Power handling 100 W max; FR 105-10,000 Hz ±3 dB; sens 86 dB SPL/W/m; imp 8 ohms. Glossy black or white laminate finish. 5½ x 9½ x 5½ in: 7 lb \$380/or

Model 1.1C 2-Way Center-Channel Speaker Sealed design with 61/2-in woofer and 1-in fer-rofluid-cooled soft-dome tweeter, Features magnetic shielding. FR 63-25,000 Hz ±3 dB: sens 88 dB; imp 8 ohms. Glossy black or white laminate finish, 71/2 x 12 x 81/2 in: 11 lb \$185

NILES

NSW-100 Powered In-Wall Subwoofer 8-in driver; outboard 100-W amplifier, Lineand speaker-level inputs. Auto on/off via music

sensing: level control; bypass and phase-reversal switches. Crossover point 100 Hz; FR 38-100 Hz ±2 dB. Amp: 17 x 31/2 x 10 in; 14 lb. Subwoofer: 14 x 42 x 3 in; 24 lb., NSW-8. As above, without amplifier.......5350

Model 200 2-Way In-Wall Speaker

61/2-in polypropylene woofer, 1-in soft-dome tweeter. Features butyl woofer surround; treated-fabric woofer dust cap. 2-position tweeter-level control. Power handling 80 W max; cross-over point 2,800 Hz; FR 55-20,000 Hz ±2 dB; sens 88 dB SPL/W/m; imp 8 ohms. Pearl-white finish. 9 x 12 x 3 in; 5 lb.. ..\$500/or

Model 75 2-Way In-Ceiling Speaker

51/4-in polypropylene woofer with treatedurethane surround, 1/4-in polycarbonate dome tweeter. Square, round, or recessed-lightingtype bezel and grille. Power handling 45 W max; crossover point 4,000 Hz; FR 63-20,000 Hz ±4 dB; sens 86 dB; imp 8 ohms. Pearl-white finish, Square: 61/4 x 61/4 x 21/2 in, Round: 71/4 x

NORMAN LABORATORIES Model 635 3-Way Speaker

Three 10-in poly woofers, 51/4-in poly midrange. 1-in dome tweeter, Power handling 600 W max; bandwidth 25-20,000 Hz; sens 95 dB; imp 8 ohms, 161/4 x 49 x 11 in; 155 lb\$1,800/pr

Model 435 3-Way Speaker Two 10-in poly woofers, 51/2-in poly midrange, 1-in dome tweeter. Power handling 500 W max; bandwidth 30-20,000 Hz; sens 94 dB; imp 8 ohms. 15 x 40 x 9½ in; 112 lb\$1,100/pr

Model 235 3-Way Speaker 10-in poly woofer, 51/4-in poly midrange, 1-in dome tweeter. Power handling 250 W max; bandwidth 38-20,000 Hz; sens 91 dB; imp 8 ohms. 12 x 23 x 91/4 in; 60 lb\$600/pr



NSM LOUDSPEAKERS The following feature a 5-vr warranty.

Model 25 2-Way Speaker

6½-in die-cast polycone woofer, 1-in soft-dome tweeter. Features ferrofluid cooling; dacron and open-cell foam damping. Biwire/biamp termi nals. Stand ontional. Power handling 150 W max; FR 35-20,000 Hz ±3 dB; sens 84 dB; imp 8 ohms. Natural-oak, walnut, or black-ash ve-neer finish. 9 x 22 x 10 in; 30 lb\$995/pr

Model 15 EXP Subwoofer

11-in cotton-fiber driver. Features 40-oz mag net; aluminum frame; rubber surround; 12-dB/ oct crossover. Power handling 200 W max; FR 25-250,000 Hz ±2.5 dB; sens 90 dB SPL/W/m; imp 8 ohms. Matte black finish. 25 x 18 x 20 in;

Model 10S 2-Way Bookshelf Speaker

41/2-in woofer, 1-in soft-dome tweeter. Features 6-dB/oct crossover. Biwire/biamp terminals. Stand optional, Power handling 200 W max; bandwidth 55-20,000 Hz; sens 84 dB; imp 8 ohms. Matte-black finish, 51/2 x 10 x 6 in ...\$695

OHM ACOUSTICS Walsh-5 2-Way Speaker

Coherent-line-source design with inverted-cone driver and supertweeter. Features protection circuitry; gold internal connectors; Monster Cable internal wiring; casters/spikes. Gold-plated 5way binding posts. 3-position controls for lows, perspective, and highs. Power handling 650 W max: FR 25-25,000 Hz ±3 dB; sens 88 dB; imp 4 ohms, Walnut, oak-wood, or black-lacquer finish. 171/2-in sq tapering to 15-in sq at top; 43 in high; 95 lb.. .\$6,000/pr

Walsh-300 2-Way Speaker

Coherent-line-source design with inverted-cone driver and supertweeter. Protection circuitry; casters/spikes. Gold-plated 5-way binding posts. Walnut, oak, or black-lacquer finish, Power handling 300 W; FR 25-25.000 Hz ±3 dB; sens 88 dB; imp 8 ohms, 131/4 x 481/4 x 173/4 \$2,495/pr

Walsh-200. As above, power handling 200 W max. FR 32-20,000 Hz ±3 dB, sens 90 dB, 11³4 .\$1.595/pr Walsh-100. As Walsh-300, power handling 100 W max. FR 40-20.000 Hz ±3 dB, sens 90 dB, 9% x 13% x 42% in \$995/pr

Sat-2 2-Way Satellite Speaker

51/4-in woofer, phase-aligned 3/4-in tweeter. Features die-cast aluminum enclosure. Gold-plated 5-way binding posts. Power handling 150 W max: FR 100-20,000 Hz ±3 dB; sens 90 dB; imp 6 ohms. Black. 51/4 x 7 x 6 in....\$400/pr

SB-1 Subwoofer

10-in dual-voice-coil driver. Designed for use with Sat-2 and Sat-1 speakers. Gold-plated 5way binding posts. Power handling 150 W max; FR 42-100 Hz ±3 dB; sens 90 dB; imp 6 ohms

OPTIMUS BY RADIO SHACK PRO SWS-500 Subwoofer/Satellite System

Subwoofer has 10-in dual-voice-coil driver; magnetically shielded satellites have 31/4-in woofers, 1/2-in polyimide-dome tweeters, 4-in passive radiators. Power handling 100 W; bandwidth 60-18,000 Hz; imp 4 ohms. Sub: 17% x 11% x 15 in. Satellites: 6 x 7½ x 6 in...

PRO CS-1 Center-Channel Speaker Acoustic-suspension design with 41/5-in woofer and ½-in dome tweeter. Power handling 35 W

rms; bandwidth 80-20,000 Hz. PRO 77 2-Way Bookshelf Speaker 5-in woofer, 1-in tweeter. Die-cast metal enclo-

sure. Power handling 70 W; bandwidth 90-20,000 Hz. Black or white, 6 x 91/4 x 41/6 in ... \$80 PRO 7AV 2-Way Bookshelf Speaker

4-in woofer, 1-in tweeter, Die-cast enclosur magnetic shielding. Power handling 40 W: bandwidth 120-20,000 Hz. 6 x 91/4 x 41/4 in ... \$70

PARADIGM

Model 9se Mk3 2-Way Speaker Two 8-in polypropylene woofers, 1-in treatedtextile dome tweeter. Features 18-dB/oct crossover. Biwire/biamp terminals. Power handling 200 W; FR 32-20,000 Hz ±2 dB; sens 93 dB SPL/W/m. 101/2 x 37 x 141/4 in; 50 lb.....\$729/pr Model 5se Mk3. As above, 12-dB/oct cross over. Power handling 150 W; sens 90 dB SPL/ W/m. 9½ x 33¼ x 11½ in; 35 lb

AMS-300 2-Way In-Wall Speaker 8-in mineral-filled polypropylene woofer, 1-in ferrofluid-cooled aluminum-dome tweeter. Fea-

tures Kapton woofer voice-coil former; 18-dB/ oct crossover. Power handling 150 W; FR 45-20,000 Hz ±2 dB; sens 90 dB. 8% x 12% x 3%

Phantom 2-Way Bookshelf Speaker 8-in polypropylene woofer, 1/4-in ferrofluidcooled tweeter. Features Kapton former, diecast woofer chassis: 12-dB/oct crossover. Pow-

er handling 150 W: FR 40-20,000 ±2 dB: sens 90 dB. 91/4 x 181/4 x 111/2 in; 22 lb...... SB-100 Subwoofer

Bandpass design with 10-in driver, Features 1½-in voice coil; Kapton former; 5½-lb magnet; 24-dB/oct crossover. Power handling 200 W; crossover point 100 Hz; FR 36-100 Hz ±2 dB; sens 94 dB. 17 x 161/4 x 19 in; 42 lb....\$239

CC-100 2-Way Center-Channel Speaker Two 51/2-in polypropylene woofers, 3/2-in ferrofluid-cooled tweeter. Kapton former: 12dB/oct crossover. Power handling 120 W; FR 70-20,000 Hz ±2 dB; sens 92 dB. Oak or blackash finish. 1916 x 616 x 716 in: 18 lb ...

Titan 2-Way Bookshelf Speaker 6-in polypropylene woofer, 1/4-in ferrofluid cooled tweeter. Features Kapton former; 12-dB/ oct crossover. Power handling 100 W; FR 55-22,000 Hz ±2 dB; sens 88 dB. 7¼ x 12½ x 9½

PARAMOUNT PICTURES MM-2.5 Powered Subwoofer/Satellite System

Band-pass subwoofer with 51/4-in driver: two 2way satellites, each with 4½-in driver; integral 3-channel 54-W amplifier. 2 line-level inputs. Balance, bass, and volume controls. Includes speaker and interconnect cables...

SS-48 Subwoofer/Satellite System Bandpass subwoofer with 8-in dual-voice-coil

driver; two 2-way dual-enclosure satellites, each with 4-in woofers, tweeter. Features sub woofer cabinet bracing...

SW-15 Subwoofer Down-firing dual-voice-coil 15-in driver, Features braced end-table-style enclosure. Push type connectors

MS-280 2-Way Speaker Two 8-in woofers, dome tweeter, Braced enclo sure, 471/2-in high ...

H/T Series The following combine an entertainment center with a home theater system.

H/T-3CH Home Theater System Integral subwoofer with 12-in dual-voice-coil

driver; integral 2-way center-channel speaker; two separate 2-way speakers, each with two 8in woofers; space for 27-in TV and 4 A/V comonents. Glass door; adjustable shelves; tape drawer. Hand-finished cherry veneer

H/T-4 Home Theater System Integral subwoofer with 10-in dual-voice-coil driver; two separate 2-way speakers, each with 51/4-in woofer; space for 32-in TV and 3 A/V components. Adjustable shelves. Charcoal-gray,

PARASOUND AWM-3806 2-Way Outdoor Speaker

Acoustic-suspension design with 51/4-in carbon fiber-reinforced polypropylene woofer and 1-in dome tweeter. Features die-cast enclosure and weather-resistant parts. Power handling 80 W cont ave: FR 48-20,000 Hz ±3 dB: sens 88 dB: imp 8 ohms; crossover point 2,400 Hz. White .\$345/pr

PHASE TECHNOLOGY PC-10.5 3-Way Speaker

Phase-coherent design with 10-in solid-piston woofer, Kevlar-laminated 51/4-in solid-piston midrange, 1-in soft-dome tweeter. Power handline 150 W: FR 25-20.000 Hz +2 dB: sens 89 dB; imp 6 ohms. Piano-black finish, 13 x 44 x 13½ in; 110 lb.

PC-8.5 3-Way Speaker

in: 58 lb...

Phase-coherent design with 10-in solid-piston woofer, 51/4-in solid-piston midrange, 1-in softdome tweeter. Power handling 120 W: FR 35-20,000 Hz ±2 dB; sens 89 dB; imp 4 ohms. Dark-oak, walnut, or black finish. 13 x 391/2 x 11% in: 90 lb.... _\$1.200/or PC-6.5. As above, 8-in woofer. Power handling 100 W: FR 42-20,000 Hz ±2 dB, 11 x 36 1/4 x 9

Model 9T 3-Way Speaker Low-diffraction design with 8-in polypropylene

woofer, 11/2-in rear-firing soft-dome midrange, and 1-in ferrofluid-cooled soft-dome tweeter Power handling 125 W; FR 35-20,000 Hz ±3 dB: sens 91 dB: imp 8 ohms. Black cloth covering with black laminate top and base, 10 x 381/2 x 141/2 in: 68 lb. PC-80 2-Way Bookshelf Speaker Phase-coherent design with 61/2-in solid-piston

imp 6 ohms. Dark or light oak, walnut, or black

woofer, 1-in soft-dome tweeter. Power handling 100 W; FR 50-20,000 Hz ±3 dB; sens 88 dB; finish. 91/2 x 151/2 x 111/4 in; 16 lb \$650/nr Model 7T 2-Way Speaker Low-diffraction design with 8-in polypropylene woofer and 1-in ferrofluid-cooled soft-dome tweeter. Power handling 100 W; FR 40-20,000 Hz ±3 dB: sens 90 dB: imp 8 ohms. Black cloth covering, black laminate top and base\$550/pr

CI-60 IV 2-Way In-Wall Speaker 61/2-in solid-piston woofer, 1-in soft-dome

tweeter. Features auto-resetting thermal circuit breakers; screened woofer baskets. 5-way binding posts. Power handling 80 W; FR 40-20,000 Hz ±3 dB; imp 8 ohms. 5-yr warranty\$500/pr

Model 2T/T-Sub Subwoofer/Satellite System One T-Sub subwoofer, two Model 2T satellites. Power handling 75 W/ch; sens 89 dB; imp 8 ohms. Black laminate finish.

CI-40 IV 2-Way In-Wall Speaker

61/2-in polypropylene woofer, 1-in ferrofluid-

cooled soft-dome tweeter. Features auto-resetting thermal circuit breakers; screened woofer basket, 5-way binding posts, Power handling 80 W; FR 45-20,000 Hz ±3 dB; imp 8 ohms. 5-yr warranty\$400/pr

PHILIPS

DSS-930 Digital Powered Speaker System Acoustic-suspension design with two 51/4-in woofers, rectangular polyimide-membrane tweeter, integral DSP/crossover, 80-W woofer amp, and 20-W tweeter amp. DSP compensates for response, phase, and crossover errors; softclipping (weeter-protection circuitry: 36-dB/oct crossover. Digital input. Crossover point 4,000 Hz; FR 40-20,000 Hz ±3 dB; S/N 100 dB. 81/4 x 23 x 13 in: 35 lb.... ...\$1,200 DSC-950. Digital preamp for above. Features 7 analog/digital inputs: multiroom capability for up to 12 DSS-930 speakers via digital bus...\$520

PINNACLE

AC-850 2-Way Speaker 8-in fiber-cone woofer with rubber surround; 1-

in oil-cooled tweeter. Features magnetic shielding. Power handling 125 W rms; crossover 2,200 Hz; bandwidth 30-21,000 Hz; sens 93 dB: imp 8 ohms, 101/4 x 251/4 x 91/4 in \$429/pr

AC-650 2-Way Bookshelf Speaker 61/2-in fiber-cone woofer with rubber surround; 3/4-in oil-cooled soft-dome tweeter. Magnetic shielding. Power handling 85 W rms; crossover point 2,500 Hz; sens 91 dB; imp 8 ohms. 9% x 16% x 8¼ in. .\$269/pr

AC-600 2-Way Bookshelf Speaker

61/2-in fiber-cone woofer with rubber surround; 1/4-in liquid-cooled dome tweeter. Magnetic shielding. Power handling 75 W rms; crossover 4.000 Hz: bandwidth 40-21.000 Hz: sens 88 dB; imp 8 ohms. 81/4 x 141/4 x 81/6 in......\$229/pr

AC-550 2-Way Bookshelf Speaker

51/4-in fiber-cone woofer with rubber surround: 1/4-in oil-cooled soft-dome tweeter. Magnetic shielding. Mounting bracket optional. Power handling 75 W rms; crossover point 2,500 Hz; FR 45-21,000 Hz; sens 87 dB; imp 8 ohms. 8%



PSB Stratus Silver

PIONEER

S-W1000 Powered Subwoofer 12-in driver: subwoofer/center-channel amplifier switchable to 70 W for subwoofer only or 30

W for subwoofer + 25 W for center channel. Features magnetic shielding; bridged BTL amp design. Center-channel speaker-level outputs. Subwoofer and center-channel level controls. Crossover point selectable at 60, 80, or 140 Hz. 19% x 21 x 17¼ in ..

Subwoofer/Satellite Systems

Each two-way satellite is magnetically shielded and measures 61/4 x 101/1 x 41/4 in. Each two-way surround speaker measures 61/4 x 101/1 x 41/4 in. Each subwoofer is black, features two 5-in dri-vers, and measures 7% x 21% x 16% in. Satellites and surrounds available in black or paintable white. Common specs for all systems except S-SR55: power handling 130 W max, crossovers at 150 and 1,300 Hz. bandwidth 40-20,000 Hz, sens 87 dB, and imp 8 ohms.

S-V401, 3 satellites, 2 surround speakers, and 1 subwoofer. Power handling 130 W max\$880 S-V301. 2 satellites, 2 surround speakers, and 1

S-4D, 3 satellites and one subwoofer. \$660 S-3D, 2 satellites and one subwoofer... \$550 S-SR55. 2 surround speakers. Power handling 130 W max; crossover point 3,000 Hz; bandwidth 150-20,000 Hz; sens 87 dB \$220

POLK AUDIO

LS90 2-Way Speaker Ported design with four 61/2-in woofers and one 1-in dome tweeter. Crossover point 2,500 Hz; bandwidth 20-26,000 Hz; sens 90 dB; imp 8 ohms. Rosewood-laminate, black, or oak finish. LS70. As above, two 71/2-in woofers, Bandwidth 25-26,000 Hz. 37 x 12 x 15 in ...\$1,199/pr 1.550, As LS70, two 61/2-in woofers, bandwidth 30-26,000 Hz. 10% x 32½ x 11%......\$899/pr

RM5000 Home Theater System Subwoofer with two 61/2-in drivers and 10-in passive radiator: two satellites, each with 31/2-in driver and 1/4-in dome tweeter, center-channel speaker with two 31/2-in drivers and 3/4-in dome tweeter. Power handling 125 W; imp 8 ohms. Black matrix finish...

RM3000 Subwoofer/Satellite System Subwoofer with two 61/2-in drivers and 10-in passive radiator: two satellites, each with 31/2-in midrange and %-in dome tweeter. Power handling 125 W: FR 42-18.000 Hz +0. -3 dB: imp

8 ohms. Black-matrix, piano-black, or white finish. Subwoofer: 12½ x 20½ x 13 in. Satellites: 7 x 41/4 x 51/2 in. 46 lb ...

AB-805 2-Way In-Wall Speaker Two 61/2-in woofers, one 1-in tweeter. Power handling 150 W; bandwidth 30-25,000 Hz; sens 91 dB; imp 8 ohms. Paintable white finish. 71/2 x 161/4 x 31/4 in..... ...\$550/pr AB-705, As above, one woofer. Power handling 100 W; bandwidth 32-25,000 Hz; sens 90 dB. 7½ x 11 x 3¼ in...

CS350LS 2-Way Center-Channel Speaker Four 41/2-in woofers, 1-in trilaminate dome tweeter, Bandwidth 60-25,000 Hz; sens 91 dB imp 8 ohms. Black. 26 x 61/4 x 11 in\$450

Monitor 6 Subwoofer/Satellite System Subwoofer with two 61/2-in trilaminate drivers; two satellites, each with 4-in bilaminate poly mer midrange and %-in dome tweeter. Power handling 100 W; FR 55-20,000 Hz +0, -3 dB; sens 89 dB SPL/W/m; imp 8 ohms. Black. Subwoofer: 71/4 x 131/4 x 10 in. Satellites: 51/4 x 81/2 x 51/4 in. 35 lb ... \$400

M5 2-Way Bookshelf Speaker 61/2-in woofer, 1-in tweeter. Power handling 100 W: bandwidth 50-23,000 Hz; sens 91 dB, Includes bracket for wall/ceiling mounting.

Black or white, 8 x 13 x 9 in..... CS250S 2-Way Center-Channel Speaker Two 41/2-in woofers, 1-in dome tweeter, Bandwidth 80-25,000 Hz; sens 90 dB; imp 8 ohms. Black, 61/4 x 18 x 81/2 in...

S4 2-Way Bookshelf Speaker ish. 10 x 16 x 7 in; 14 lb

61/2-in woofer, 1-in dome tweeter, Crossover point 3,000 Hz; bandwidth 32-25,000 Hz; sens 91 dB SPL/W/m; imp 8 ohms. Black or oak fin-

M3 Series II 2-Way Bookshelf Speaker 51/4-in woofer, 1/2-in dome tweeter. Power hand-

long 100 W; bandwidth 67-20,000 Hz; sens 89 dB. Includes bracket for wall/ceiling mounting. Black or white. 61/2 x 111/4 x 81/4 in\$249/pr

PROAC Response Two 2-Way Speaker

Two 61/2-in polypropylene woofers, 3/4-in dome tweeter. Power handling 100 W max; bandwidth 30-30,000 Hz; sens 86 dB SPL/W/m. 9 x 18 x 11 in\$3,000/pr

Studio 200 2-Way Speaker Two 7-in magnesium-frame woofers, 1-in dome tweeter. Power handling 250 W max; bandwidth 30-22,000 Hz; sens 90 dB SPL/W/m; imp

8 ohms, 8 x 42 x 10 in: 58 lb\$3.000/pr Studio 100 2-Way Bookshelf Speaker 61/2-in woofer, 1-in dome tweeter. Power handling 150 W max; bandwidth 40-30,000 Hz; sens 88 dB; imp 8 ohms. 8 x 16 x 10 in......\$1,500/pr

PSB Stratus Gold 3-Way Speaker

10-in woofer, 6-in midrange, 1-in aluminumdome tweeter. Power handling 250 W max; rossover points 250 and 2,200 Hz; FR 36-20,000 Hz ±1 dB; sens 88 dB; imp 4 ohms. Black high-gloss finish Black, light, or dark oak finish .. .\$2.100/pr

Stratus Silver 2-Way Speaker

Two 61/2-in polymer woofers, 1-in aluminumdome tweeter. Power handling 200 W max; crossover points 500 and 2,100 Hz; FR 40-20,000 Hz ±1.5 dB; sens 91 dB; imp 4 ohms. Black high-gloss finish, 131/2 x 381/4 x 91/2 in: \$1.650/pr Black, light, or dark oak finish .. \$1,500/pr

Subsonic II Powered Subwoofer

Vented design with 12-in poly-coated compressed-felt cone driver. Features butyl-rubber driver surround. Adjustable level and roll-off controls; phase switch, Bandwidth 27-150 Hz; sens 106 dB. Black-oak finish. 16-in cube...\$799

PSB-400 2-Way Bookshelf Speaker 61/2-in carbon-filled polypropylene woofer, 3/4-in ferrofluid-cooled cloth-dome tweeter. Fea-

tures cabinet bracing; rubber/PVC woofer surround; bipolar capacitors. Power handling 125 W; crossover 2,500 Hz; FR 60-20,000 Hz ±1.5 dB: sens 89 dB: imp 6 ohms, Black or medium oak finish. 8½ x 16 x 11¾ in; 18 lb......\$399/pr

Alpha 2-Way Bookshelf Speaker 61/2-in woofer, 1/2-in ferrofluid-cooled polydome tweeter. Stand optional. Power handling 80 W; crossover 3,000 Hz; FR 90-20,000 Hz ±2 dB; sens 90 dB; imp 6 ohms. Simulated blackoak finish. 814 x 1216 x 912 in; 10 lb\$199/pr

Model 100C 2-Way Center-Channel Speaker Two 4-in woofers, 1/2-in poly-flare dome tweet-er. Features foam woofer surround. Power handline 100 W max; crossover point 3,000 Hz; FR 95-21,000 Hz ±2 dB; sens 93 dB; imp 6 ohms Black-oak finish. 71/2 x 17 x 6 in; 13 lb \$179

QUAD

ESL-63 US Monitor Electrostatic Speaker Full-range dipole design. Features 2 protection circuits. Power handling 150 W; FR 32-22,000 Hz -4 dB; sens 86 dB SPL/W/m; imp 8 ohms. 19 x 28 x 11 in: 43 lb...

Gradient SW-63 Subwoofer

Dipole design with four 12-in drivers. Designed to match ESL-63 US Monitor. Features electronic crossover with level control and mono/ stereo switch. Balanced version optional, 19 x 28 x 11 in; 41 lb., ...\$2,995/pr

RADIO SHACK

AMX 15 Powered Minispeaker 4-in driver; 5-W amplifier, Volume and balance controls. Bandwidth 20-20,000 Hz. 51/4 x

RCA

SP5050C Center-Channel Speaker Tuned-port design with four 2½-in full-range drivers. Magnetic shielding. Power handling 120 W max; bandwidth 100-17,000 Hz; sens 94

dB; imp 8 ohms, 17 x 41/2 x 6 in; 10 lb ...\$199/pr SP5060S2 Surround Speaker

Tuned-port design with 31/2-in full-range driver. Magnetic shielding; plastic cabinet with wall mounting brackets. Power handling 70 W max; bandwidth 100-10,000 Hz; sens 90 dB; imp 8 ohms. Charcoal-gray. 6 x 71/2 x 4 in.......\$149/pr

RDL ACOUSTICS

The following are available factory-direct with a 30-day trial period and a 5-yr warranty.

RDL Home Theater System

Subwoofer with 8-in driver; five RDL AV-1 speakers. Power handling 150 W max; crossovers 150 and 2,000 Hz; bandwidth 50-20,000 Hz; sens 87 dB; imp 8 ohms. Black lacqueredwood finish. Subwoofer: 12-in cube\$680

RDL FS-1 2-Way Speaker

Acoustic-suspension design for placement away from wall. 8-in woofer, 1-in tweeter. Power handling 150 W max; crossover point 2,000 Hz; bandwidth 40-20,000 Hz; sens 87 dB; imp 8 ohms. Lacquered cherry-veneer finish. 11 x 25 x 11 in; 32 lb., .\$549

RDL F-1 2-Way Speaker

Acoustic-suspension design for near-wall placement. 8-in top-mounted woofer and 1-in tweeter. Power handling 150 W max; crossover point 2,000 Hz; bandwidth 40-20,000 Hz; sens 87

RDL B-1 2-Way Bookshelf Speaker Acoustic-suspension design with 8-in woofer and 1-in tweeter. Power handling 150 W max; crossover point 2,000 Hz; bandwidth 45-20,000 Hz; sens 87 dB; imp 8 ohms. Lacquered cherryveneer finish. 11 x 20 x 11 in; 27 lb......\$449

RECOTON

W-440 Wireless Powered Speaker System 2 bass-reflex speakers; each has 4-in woofer. 2-in tweeter, and 20-W amplifier. 150-ft range; ABS enclosures. Bass boost: L/R mono/ stereo switches; volume and power switches for each speaker. Includes transmitter, 3 AC adaptors, phone-to miniplug adaptor. Mounting brackets optional Bandwidth 50-15 000 Hz

W-400 Wireless Powered Speaker System 2 bass-reflex speakers; each has 4-in woofer and 2-in tweeter; one has 10-W amplifier, 2nd speaker passive. Features 150-ft range; ABS enclosures, Bass boost; L/R mono/stereo switches. Includes transmitter, 2 AC adaptors, and phone-to-miniplug adaptor. Mounting brackets optional. Bandwidth 50-15,000 Hz ...

REEL TO REAL DESIGNS

The following are available in hand-rubbed walnut, black lacquer, oak, ribbon mahogany, or rosewood and feature a 10-yr warranty.

Focus 4-Way Speaker

Three 12-in carbon-poly woofers, two 7-in Keylar midranges, one 11/4-in metalized-dome tweeter, and one samarium-cobalt ribbon supertweeter, Features internal bracing; Cardas internal wiring: rolled-tambour front corners. Bi wire/biamp terminals. Power handling 1,000 W max; crossover points 180, 2,800, and 12,000 Hz; bandwidth 16-30,000 Hz; sens 98 dB. 16 x 55 x 14 in; 175 lb., .\$4,850/pr

Legacy Signature III 4-Way Speaker Three 10-in carbon-poly woofers, two 61/2-in

poly midranges, one 11/4-in dome tweeter, and one ribbon supertweeter. Features bipolar response above 5,000 Hz; slot-loaded subwoofer Biwire/biamp terminals. Power handling 400 W max; crossover points 80, 2,800, and 8,000 Hz; bandwidth 20-30,000 Hz; sens 93.5 dB; imp 4 ohms. 12 x 48 x 12 in; 130 lb ...

Protégé 2-Way Bookshelf Speaker Two 61/2-in polyglass woofers, 1-in aluminumdome tweeter, and rear-firing ambience tweeter. Features phase plugs; dispersion lens. Biwire/ biamp terminals. EQ control. Stand optional Power handling 300 W cont; crossover 3,500 Hz; bandwidth 38-25,000 Hz; sens 96 dB; imp 4 ohms. 12 x 21 x 12 in; 60 lb\$2,296/pr

Legacy-1 4-Way Speaker Two 10-in polypropylene woofers, 6½-in curvi-

linear poly midrange, 11/4-in metalized-dome tweeter, ribbon supertweeter, rear-firing tweeter. Biwire/biamp terminals. Power handling 300 W cont; crossover points 120, 2,800, and 8,000 Hz: bandwidth 22-30,000 Hz: sens 92 dB: imp 4 ohms. 12 x 44 x 12 in; 110 lb\$1,996/pr

ROCK SOLID SOUNDS Twin Bass Subwoofer

Dual-port design with two 61/4-in drivers. Designed for use with Solid Monitor. Power handling 150 W max; crossover point 120 Hz; FR 38-120 Hz ±3 dB; sens 91 dB SPL/W/m; imp 4 ohms. Black or white. 5-yr warranty. 7 x 18 x 23¼ in: 22 lb ...

Solid Monitor 2-Way Satellite Speaker

Vented-bass enclosure with 51/4-in fiber-conwoofer and 1-in polycarbonate tweeter. Features 4th-order alignment; magnetic shielding; overload protection. Includes integral stand. Power handling 150 W max; FR 75-20,000 Hz ±3 dB; sens 90 dB SPL/W/m. Black, white, two-tone gray, or black/purple finish. 5-yr war-ranty, 61/5 x 93/6 x 6 in \$299/or

RUARK

Talisman II 2-Way Speaker 6½-in woofer, 1-in tweeter. Power handling 100 W max; bandwidth 48-20,000 Hz; sens 88 dB; imp 8 ohms. Dark walnut, black-ash, oak, or rosewood finish. 5-yr warranty. 9 x 33 x 121/2 in: 66 lb...

Sabre II 2-Way Bookshelf Speaker 61/2-in woofer, 1-in tweeter. Power handling 100 W max; bandwidth 60-20,000 Hz; sens 87 dB; imp 8 ohms. Walnut or black-ash finish. 5yr warranty. 9 x 141/2 x 101/2 in; 36 lb\$950/pr

SEQUERRA ASSOCIATES

MET-8 MkII Subwoofer 10-in polypropylene driver. Designed for use with MET-7 MkII. Features die-cast magnesium driver frame: double driver magnet: aircore inductors. Gold-plated 5-way binding posts. Power handling 500 W cont ave; sens 90 dB; imp 8 ohms. Satin black-lacquer finish. 5yr warranty. 131/2 x 33 x 173/4 in\$2,500/pr Oak or walnut finish ... S1,200/pr

MET-9 MkII Ribbon Tweeter

Planar aluminum ribbon. Features crossover with air-core inductors, polypropylene capacitors, and OFC wiring. Gold-plated 5-way bind-ing posts. FR 4,500-50,000 Hz ±2 dB; sens 88 dB; imp 6 ohms. Satin black-lacquer finish, 5yr warranty...... Oak or walnut finish\$1.700/pr

MET-7 MkII 2-Way Bookshelf Speaker Sealed-box design with 61/2-in polypropylene woofer and 2-in tweeter. Features 6-dB/oct crossover with air-core inductors, polypropylene capacitors, and OFC wiring, Gold-plated 5-

way binding posts. Tweeter level control. Pow-er handling 250 W cont avg; FR 54-20,000 Hz +2 dB; sens 90 dB; imp 8 ohms. Satin blacklacquer finish. 5-yr warranty. 71/4 x 111/4 x 111/4 in: 13.1h \$750/pr Oak or walnut finish ..

SHAHINIAN Obelisk 3-Way Speaker

Folded double-prism hybrid transmission-line design with 8-in asymmetrically positioned polypropylene woofer, two 1%-in cambricdome midranges, four 1/6-in W-shaped dome tweeters, and 10-in mass-loaded-membrane polypropylene passive radiator. Features wool and virgin polyfil damping; fuse protection Dual binding posts. Power handling 500 W; FR 28-22,000 Hz ±3 dB; imp 6 ohms. Walnut or oak standard finish: other finishes available. 14½ x 29 x 12½ in; 56 lb.... ...\$2,150/pr

Hawk Subwoofer

Folded transmission-line enclosure with 8-in polypropylene driver and 10-in passive radiator. Features wool and virgin polyfil damping; butvl-rubber surround; 1½-in aluminum voice coil; cast-magnesium housing; multiple crossover points for low- and high-pass filters. Satellite-speaker inputs; 5-way solid-brass binding posts. Power handling 150 W cont ave: FR 25-500 Hz ±3 dB; imp 6 ohms. 14½ x 30 x 11¼ in;

Super Elf 2-Way Bookshelf Speaker

Vented design with 51/4-in polypropylene woofer and 1-in titanium-dome tweeter. Features 1-in voice woofer coil; wool and polyfil damping; ferrofluid cooling; neodymium magnet. Dual 8-way gold-plated solid-brass binding posts. Power handling 150 W cont avg; FR 48-19,500 Hz -3 dB; imp 6 ohms. Natural, medium, or dark oak finish, 6% x 12½ x 7¼ in: .\$750/pr

SIGNET

SL260B/U 2-Way Bookshelf Speaker

Vented enclosure with 6-in polypropylene woofer and 1/4-in aluminum-dome tweeter. Features biwire/biamp terminals. Power handling 150 W; crossover 3,000 Hz; sens 87 dB; bandwidth 45-25,000 Hz; imp 8 ohms. Black vinyl finish. 81/4 x 151/2 x 123/4 in; 21 lb\$450/or

SL250B/U 2-Way Bookshelf Speaker Vented enclosure with 51/2-in paper woofer and 1/4-in metallized polycarbonate-dome tweeter. Power handling 100 W; crossover 3,300 Hz; bandwidth 50-22,000 Hz; sens 88 dB. Black vinyl finish, 7 x 121/2 x 10 in; 12 lb......\$300/pr

SNELL ACOUSTICS Type R 4-Way Speaker

10-in rear-firing subwoofer, 10-in woofer, two 51/4-in polypropylene midranges, 1-in aluminum-dome tweeter, and 1/4-in rear-firing tweeter, Crossover points 40, 275, 2,700, and 5,000 Hz: bandwidth 20-20,000 Hz; sens 86 dB; imp 4 ohms 25 v 48 v 10 in: 152 lb \$4,799/pr

Type B Minor 3-Way Speaker 12-in side-firing woofer, two 51/4-in cast-frame

polypropylene-cone midranges, 1-in tweeter, and 4-in rear-firing tweeter, FR 20-20,000 Hz ±2 dB; sens 88 dB; imp 4 ohms\$3,599/pr

Type D 3-Way Speaker Reflex design with 8-in woofer, 5-in midrange,

1-in titanium-dome tweeter, and 1-in rear-firing supertweeter. Features internal bracing. Cros over points 350 and 2,800 Hz; FR 36-20,000 Hz ±1.75 dB; sens 87 dB; imp 8 ohms. Hand-finished oak, dark-oak, walnut, or black veneer. 10½ x 43 x 12½; 90 lb., .\$1,699/pr

Type K/II 2-Way Bookshelf Speaker Acoustic-suspension design with 8-in polypro-

pylene woofer and 1/4-in ferrofluid-cooled softdome tweeter. Biwire/biamp terminals. Adjustable crossover points. Power handling 100 W cont: crossover point 2,700 Hz: FR 70-20,000 Hz ±2 dB; sens 90 dB; imp 8 ohms. Oak, dark oak, walnut, or black veneer finish. 11 x 18 x 9 in: 26 lb...

SNELL MULTIMEDIA

THX Senior Speaker System Two SUB-1800 subwoofers, three LCR-1800 speakers, and two SUR-500 surrounds ..\$11,293

SUB-1800 Subwoofer

4th-order vented enclosure with 18-in driver. Features THX certification; cast driver frame; dual driver spider. Bandwidth 17-80 Hz; sens 90 dB SPL/W/m: imp 8 ohms. High-gloss black vencer finish. 221/2 x 45 x 161/2 in... ...\$2,499

LCR-1800 2-Way Speaker

Two 8-in woofers, two 1-in tweeters. Designed for front or center channels in home theater system. Features THX certification; magnetic shielding, Stand optional, Bandwidth 80-20,000 Hz; sens 93 dB; imp 4 ohms. High-gloss black veneer finish, 13 x 25 x 11% in; 46 lb.....\$1,499

SUR-500 2-Way Surround Speaker

Dipole design with two 61/2-in polypropylene woofers and two 1-in aluminum-dome tweeters. Features THX certification, Power handling 150 W cont avg; bandwidth 125-20,000 Hz; sens 85 dB; imp 8 ohms. High-gloss black veneer finish, 91/2 x 161/2 x 71/4 in: 30 lb.,

SONANCE

AIS 500 2-Way In-Wall Speaker Angled buffle with 31/2-in polypropylene fullrange driver on upper angle and 4-in polypropylene woofer and 1-in polycarbonate tweeter on lower angle. Includes mounting bracket. Power handling 75 W; FR 60-20,000 Hz ±5 dB; sens 89 dB SPL/W/m; imp 6 ohms. Footprint 12 x 16 in \$499/or

S3500 2-Way In-Wall Speaker

61/2-in polypropylene dual-voice-coil woofer, pivoting 1-in ferrofluid-cooled soft-dome tweeter. Features neodymium tweeter magnet; rubber woofer surround. 3-position tweeter and woofer-imp controls. Power handling 75 W max: FR 45-20,000 Hz +2 dB; sens 89 dB SPL/W/m; imp 4/6/8 ohms. Paintable matte-white finish.

PSW2 In-Wall Subwoofer 8-in dual-voice-coil driver. L/R inputs and out-

puts. Crossover: 3-position level control. Power handling 75 W; crossover point 125 Hz; FR 30-125 ±3 dB; sens 87 dB SPL/W/m; imp 6 ohms. White, 12 x 16 x 31/2 in...

S3R 2-Way In-Wall Speaker Coaxial design with 61/2-in dual-voice-coil

woofer and pivoting 1-in soft-dome tweeter. Includes mounting bracket. Power handling 75 W: FR 45-20,000 Hz ±3 dB; sens 89 dB; imp 6 ohms, 91/4-in diameter... \$425/pr

SB31 2-Way Outdoor Speaker 4-in polypropylene woofer, 1-in soft-dome tweeter. Features water-resistant ABS sealed

cabinet: stainless-steel hardware. Includes nail hanger. Power handling 50 W: FR 70-20.000 ±2 dB; sens 87 dB SPL/W/m; imp 6 ohms. White or black, 51/2 x 81/2 x 51/2 in... S2000 2-Way In-Wall Speaker

61/2-in polypropylene woofer. 1-in ferrofluiddamped polycarbonate-dome tweeter. Power handling 50 W rms; FR 50-20,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 8 ohms. 81/4 x 121/4 x \$265/or

SONY

SS-M7 3-Way Speaker Sealed design. Power handling 200 W; cross-over points 300 and 4,000 Hz; FR 47-20,000 Hz ±3 dB; sens 86 dB; imp 6 ohms

SA-VA3 Powered Home Theater System 4 pieces: front left and right tower speakers with integral subwoofers and angled drivers for center channel: 2 surround speakers, 121-W 3ch amplifier and system controls in left front tower. Line-level center-channel amp output. Integral Dolby Pro Logic decoder with 5 surround modes; bass and treble controls; auto power-on/off: remote control ...

SS-M3 2-Way Speaker

Scaled design. Power handling 120 W: crossover point 2,000 Hz; FR 70-20,000 Hz ±3 dB; sens 85 dB; imp 6 ohms.



Snell Acoustics Type K/II

Time Domain Model 4 3-Way Speaker Two-piece design with 8-in Kevlar woofer in one enclosure. 7-in dual-voice-coil Kevlar midrange and inverted-dome Kevlar tweeter mounted on sloping buffle in second quasipyramid-shaped enclosure. Triwire/triamp ter-minals. Power handling 200 W max; FR 38-22.000 Hz ±3 dB; sens 89 dB SPL/W/m; imp 8 ohms. Woofer enclosure: 111/2 x 32 x 16 in; 55 lb. Midrange/tweeter enclosure: 12 x 161/2 x 111/2 in; 32 lb... ..\$3.500/or

SOUND DYNAMICS R-818 2-Way Speaker

Bass-reflex design with two 8-in injectionmolded woofers, 1-in trilaminate metal-dome tweeter. Features rubber woofer surrounds; biwire/biamp terminals. Adjustable foot spikes. Power handling 200 W cont avg; crossover point 2,200 Hz; FR 34-20,000 Hz ±3 dB; sens 90 dB SPL/W/m; imp 8 ohms. Black-ash finish. 10 x 43 x 14 in ... \$700/or

ASUB-12 Powered Subwoofer Dual-rear-port design with 12-in driver; 90-W

amp. Features low-pass filter adjustable from 50-130 Hz. Line- and speaker-level inputs. EQ switch, Black-ash finish, 18 x 18 x 20 in\$500

Home Theater Series

Cinesat-2 2-Way Satellite Speaker Acoustic-suspension design with 41/2-in polypropylene woofer and ½-in titanium-polycarbonate tweeter. Stand or wall bracket optional. Power handling 125 W cont avg; crossover point 2,500 Hz; FR 140-22,000 Hz ±3 dB; sens 86 dB; imp 6 ohms. 8 x 5 x 5 in; 5 lb\$249/pr

Cinesub Subwoofer

Cinecenter Center-Channel Speaker
Dual-vented design with two 4½-in woofers
and ½-in polycarbonate flared-dome tweeter
mounted on sloped baffle. Power handling 100
W cont avg; crossover 2,500 Hz; sens 86 dB;
imp 8 ohns, Black-ash vinyl veneer...........\$149

SOUND-LAB A-3 Electrostatic Speaker

A-4 2-Way Electrostatic Speaker 61 x 20-in woofer element, 61 x 4-in tweeter element. Crossover point 750 Hz; FR 32-22,000 Hz ±2 dB; sens 86 dB; imp 8 ohms\$4,975/pr

Pristine Electrostatic Speaker Full-range electrostatic element. Power handling 100 W; FR 34-22,000 Hz ±2 dB; sens 88 dB; imp 8 ohms. 60 x 28 x 27 in; 100 lb.:53,990

SPEAKERLAB SL 5 3-Way Speaker

SL 42-Way Speaker

Two 6½-in woofers, one 1-in metal-dome tweeter, Features D'Appolito configuration. FR 35-21,000 Hz ±3 dB; sens 91 dB SPL/W/m. Red-oak veneer finish \$499/pr Kit \$429/pr

SL SW Subwoofer 10-in dual-voice-coil driver. FR 30-180 Hz ±3 dB; sens 91 dB. Red-oak veneer finish\$329

SPICA

Angelus 2-Way Speaker Mirror-imaged system with 8-in plastic-cone woofer and 1-in soft-dome tweeter. Features computer-opimized crossover, Adjustable carpet spikes. Power handling 200 W max; crossover point 3,400 Hz; FR 37-17,500 Hz 28 in mp 8 ohms. Walnut or oak finish. 21 x 46 x 10½ in 57 10.

TC-50 2-Way Bookshelf Speaker Acoustic-suspension design with 61/2-in woofer

and 1-in dome tweeter. Features triangular cabinet to keep sound within 15° of absolute phase from 350-3,000 Hz. Power handling 50 W cont; crossover 2,500 Hz; FR 58-16,500 Hz ±3 dB; sens 83 dB; imp 4 ohms. Oak, walnut, or black finish. 13 x 15½ x 11½ in; 21 lb\$550/pr

SYMDEX

Epsilon Signature 3-Way Speaker Venied design with 10-in Neoflex cone woofer, 7-in dual-voice-coil Neoflex midrange, 1-in ferorliuid-cooled aluminum dome tweeter, features polypropylene capacitors. Power handling 250 W; crossover points 100 and 2,300 Hz; bandwidth 25-20,000 Hz; sens 88 dB; imp 8 ohms, 13 x 48 yz, 13 in ... \$45-000 Hz.

TANNOY

Model 611 3-Way Speaker Sealed-box design with 8-in woofer and 8-in dual-concentric midrange/tweeter. Features 6dB/oct low-pass crossover. Gold-plated terminals. Power handling 150 W cont avg; crosover points 400 and 2,500 Hz; bandwidth

45-30,000 Hz ±3 dB; sens 91 dB; imp 6 ohms. 12% x 27½ x 8% in; 33 lb\$900/pr

C-10 2-Way Speaker 10-in woofer, 1-in tweeter. Features rear port.

RTL-3 2-Way Speaker
Two 6½-in woofers, ¾-in tweeter. Biwire/biamp terminals. Power handling 120 W max;
crossover point 3,000 Hz; bandwidth 35-20,000
Hz; sens 90 dB SPL/W/m; imp 8 ohms, Black

6½-in woofer, ¼-in tweeter. Power handling 80 W max; crossover point 3,000 Hz; bandwidth 45-20,000 Hz; sens 87 dB; imp 8 ohms. Black or rosewood finish. Lifetime warranty. 8 x 15½ x 8¼ in; 17 lb......\$400/pr

Near Field Monitor 2-Way Bookshelf Speaker

Bookshelf Speaker 4-in woofer, 1/2-in tweeter. Power handling 60 W max; crossover 5,000 Hz; bandwidth 50-20,000 Hz; sens 88 dB; imp 8 ohms. Black or rossewood finish. 7 x 10/y x 6/4 in 7 lb. \$250/nr

TECHNICS SB-FW40 Subwoofer/Satellite System

SB-FW40 Subwoofer/Satellite System
Subwoofer with four 8-in drivers; two satellites, each with four 3½-in cone drivers. Features magnetic shielding. Power handling 260 W. Subwoofer: 9½-x 22 x 16½ in. Satellites: 5½ x 16½ x 4½ in. Satellites: 5380

THIEL CS3,6 Coherent Source 3-Way Speaker

10-in woofer, double-core 4%-in midrange, and 1-in metal-dome tweeter, Features 6-dB/oct crossover; copper woofer rings; midrange and tweeter with short-coi/(long-gap magnet structure; internal bracing; 3-in stoping baffle with rounded edges; polystyrene capacitors. FR 29-20,000 Hz ±1.5 dB; sens 86 dB; imp 4 ohms. 12½ x 48½ x 17 in: 107 lb.

CS2 2 Coherent Source 3-Way Speaker Woofer, metal-dome tweeter. Features sloping baffle; copper woofer rings; short-coil/long-gap tweeter magnet structure. FR 35-20,000 Hz ±2 dB; sens 86 dB; imp 4 ohns. Walnut or black wood finish, 12 x 42 x 13 in; 70 lb \$22,750/pr

CS1.5 Coherent Source 2-Way Speaker Aluminum-cone woofer, metal-dome tweeter. Features sloping baffle; internal bracing. Power

Features sloping baffle; internal bracing. Power handling 150 W cont avg; FR 45-20,000 Hz Hz ±2 dB; sens 86 dB; imp 6 ohms. Walnut or black finish. 8½ x 33 x 11 in; 42 lb....\$1,950/pr

SCS Coherent Source 2-Way Speaker
Woofer with coaxially mounted tweeter. Features internal bracing; crossover with polystyrene capacitors. FR 64-20,000 Hz ±3 dB;
sens 87 dB; imp 4 ohms. Walnut or black finsh, 23 lb. \$1,090/or

TRIAD
Thunder Gold Powered Subwoofer

Pash-pall design with two 10-in drivers, 250 W amp. Features servo control. Variable phase control; variable 50-180 Hz 12-d8/bct low-pass filter; center-channel recovery to enable use of small center-channel speaker, FR 20-180 Hz -40, -3 dB, 19/4 x 17% x 17% in ... \$1,050 Thunder Bronze. As above, one 10-in driver, 150 W amp. No push-pull design, 13/4 x 15/4 x 14 in ... \$25.00 HT Gold 2-Way Satellite Speaker 7-in polypropylene midrange, 11/4-in fabric-dome

tweeter. Magnetic shielding optional. Power han-dling 125 W: bandwidth 72-20,000 Hz; sens 91

VANDERSTEEN Model 3 3-Way Speaker

10-in active acoustic coupler, 8-in poly-con woofer, 41/2-in poly-cone ferrofluid-cooled midrange, 1-in damped ferrofluid-cooled metal-alloy dome tweeter. Biwire/biamp terminals. Power handling 200 W; crossovers 600 and 5,000 Hz; FR 26-30,000 Hz ±3 dB; sens 88 dB; imp 6 ohms. 16 x 48 x 101/4 in: 97 lb...\$2.395/or

Model 2Ce 3-Way Speaker

10-in long-fiber active acoustic coupler, 8-in poly-cone woofer, 41/2-in ferrofluid-cooled poly-cone midrange, 1-in critically damped ferrofluid-cooled metal-alloy tweeter. Biwire/biamp terminals. Power handling 160 W; cross-over points 600 and 5,000 Hz; FR 28-29,125 Hz ±3 dB; sens 88 dB SPL/W/m; imp 7 ohms. 16 x 39% x 10% in: 63 lb...\$1.295/pr

Model 1B 2-Way Speaker Rear slot-loaded design with 8-in poly-cone woofer and 1-in metal-alloy polymer-dome tweeter. Power handling 100 W; crossover point 2,800 Hz; FR 38-20,000 Hz ±3 dB; sens 90 dB; imp 6.8 ohms. 12 x 36 x 10 in; 50 lb\$695/pr

VECTOR RESEARCH VRP-275 Pro Series

Subwoofer/Satellite System

Subwoofer with 8-in driver; two magnetically shielded satellites with 3½-in midranges and 2½in tweeters. Power handling 125 W subwoofer, 75 W satellites; bandwidth 28-150 subwoofer. 140-20,000 Hz satellites; sens 90 dB subwoofer, 89 dB satellites; imp 6 ohms subwoofer, 8 ohms satellites. Subwoofer: 51/4 x 201/4 x 121/4 in. Satellites- 456 v 816 v 416 in

VELODYNE

F-1500R Powered Subwoofer 15-in servo-controlled driver, 250-W Class A/B amplifier; passive 85-Hz high-pass filter; adjustable 40-100 Hz low-pass filter; remote con trol with volume and on/off controls. FR 18-85 Hz ±3 dB: THD 0.7%. Black woodgrain or granite vinvl finish. 20-in cube; 79 lb\$1,495

F-1200 Powered Subwoofer

12-in servo-controlled driver, 100-W Class A/B amp; passive 85-Hz high-pass filter; adjustable 40-100 Hz low-pass filter. FR 20-85 Hz ±3 dB; THD 1%. Black woodgrain or granite vinyl finish. 16%-in cube; 55 lb \$1.095 F-1000. As above, 10-in driver. 80-W amp 141/4-in cube: 44 lb ...

VA810 Powered Subwoofer 8-in driver, 10-in passive radiator; 50-W Class

A/B amp; 85-Hz high-pass filter; 6-dB/oct lowpass filter. Line- and speaker-level inputs and outputs. Bandwidth 35-85 Hz. Black ..

VIDEO ACOUSTICS VAISOOBK Subwoofer

Ported enclosure with 8-in dual-voice-coil driver. Features magnetic shielding. 5-way binding posts. Power handling 250 W max; crossover point 60 Hz; FR 31-72 Hz ±3 dB; sens 87 dB; imp 8 ohms. Genuine oak-veneer finish. 191/2-in cube: 76 lb.,

VA1200BK Surround Speaker Multichambered enclosure with two 41/2-in side-

x 756 x 10 in: 30 lb

151/2 x 7 x 7 in; 16 lb

firing woofers and four top-loaded 31/2-in tweeters. Features multipolar radiation; asymmetrical crossover. 5-way binding posts. Power handling 150 W max; crossover point 400 Hz; sens 92 dB; imp 8 ohms. Genuine oak-veneer finish. 24

VA1300BK 2-Way Center-Channel Speaker Two 51/4-in woofers, 11/4-in horn-loaded polycarbonate-dome tweeter. Features magnetic shielding; angled baffle. 5-way binding posts. Power handling 200 W max; crossover point 3,000 Hz; FR 100-19,000 Hz ±4 dB; sens 90 dB; imp 8 ohms. Genuine oak-veneer finish.

Velodyne F-1500R

The following feature a 5-yr warranty.

Tower II Special Edition 4-Way Speaker Multiband-bass design with three 12-in woofers; 51/4-in cone midrange; 1-in ribbon tweeter;

1-in dome supertweeter with level controls. Biwire/biamp terminals. Power handling 300 W max; crossovers 200, 600, 5,000, and 15,000 Hz: bandwidth 22-40,000 Hz; sens 92 dB; imp 4 ohms. 151/2 x 45 x 16 in; 110 lb\$1,876/pr

Mini Tower Ha 4-Way Speaker

Passive-radiator design with two 10-in woofers; 5-in cone midrange and two 1-in dome tweeters have level controls. Power handling 200 W max; crossover points 600, 5,000, and 15,000 Hz; bandwidth 28-30,000 Hz; sens 90 dB; imp 8 ohms, 12 x 39 x 15 in; 80 lb., \$958/nr

VMPS Dedicated Subwoofer Two 12-in drivers. Power handling 200 W max; crossover 100 Hz; bandwidth 28-200 Hz; sen 92 dB; imp 8 ohms. 151/2 x 26 x 16 in......\$858

WESTLAKE AUDIO C-8 3-Way Speaker

Ported 8-in woofer, 31/2-in midrange, and 3/4-in tweeter. Bandwidth 42-19,000 Hz ±3 dB. Black oak finish. 11 x 411/2 x 10 in; 50 lb\$3,000/pr

C-6 2-Way Speaker Ported design with 6-in woofer and 34-in tweeter, FR 44-20,000 Hz ±3 dB, Black oak finish, 9 x 391/2 x 11 in; 30 lb..... .\$1.750/pc

WHARFEDALE

CRS 9 3-Way Speaker 10-in woofer, 5-in midrange, 1-in tweeter. Pow er handling 170 W max; crossover point 4,000 Hz: handwidth 35-25,000 Hz; sens 92; imp 8 ohms. 12 x 311/2 x 11 in; 35 lb...... Model 2130 Subwoofer/Satellite System

Subwoofer with two 8-in drivers in push-pull configuration: two satellites, each with 4-in midrange and two 3/4-in metal-dome tweeters. Power handling 40 W cont; bandwidth 40-22,000 Hz; sens 89 dB; imp 8 ohms. Black-vinyl finish. 5-yr warranty. Subwoofer: 8 x 12½ x 19¾ in. Satellites: 8¾ x 5½ x 4¼ in.......5600

Diamond V 2-Way Bookshelf Speaker

Ported design with 5-in mineral-filled polypropylene woofer and 1-in metal-dome tweeter. ower handling 100 W max; crossover points 3,500, 6,000, and 18,000 Hz; bandwidth 47-25.000 Hz; sens 86 dB; imp 8 ohms, 5-vr warranty. 71/4 x 101/2 x 71/4 in; 9 lb\$300/pr Diamond III. As above, 41/2-in woofer and 3/4in dome tweeter. 7 x 9 x 8 in; 8 lb\$200/pr

YAMAHA Tri-Sound A1 Subwoofer/Satellite System

Two NS-A325 satellites and YST-SW120 po ered subwoofer. Tri-Sound A2. As above, with YST-SW60 powered subwoofer

YST-SW120 Powered Subwoofer Two 7-in pure-spruce drivers; 70-W amp. Fea-

tures proprietary Active Servo Technology; magnetic shielding; 24-dB/oct low-pass filter variable from 40-140 Hz; banana-plug terminals; phasereversal switch: vol control, bandwidth 21-180 Hz. 81/2 x 241/4 x 161/4 in; 36 lb YST-SW60. As above, 50-W amp; filter variable from 50-200 Hz; no phase switch, bandwidth 25-250 Hz. 81/4 x 181/4 x 141/4 in \$299

NS-AC300 2-Way Center-Channel Speaker Acoustic-suspension design with two 61/2-in polypropylene woofers and one 1-in dome tweeter. Features magnetic shielding; 12-dB/oct crossover. 5-way binding posts. Tweeter attenuator control. Power handling 220 W max; crossover point 6,000 Hz; bandwidth 50-20,000 Hz; sens 90 dB; imp 8 ohms. High-gloss black finish. 231/2 x 71/2 x 91/2 in; 21 lb... \$299

WSX-10 2-Way In-Wall Speaker 61/4-in woofer, 1-in tweeter. New-construction

bracket available. Power handling 80 W; bandwidth 50-25,000 Hz; sens 89 dB; imp 6 ohms. White paintable finish, 8% x 12% x 3% in ...\$200

NS-AC200 2-Way Center-Channel Speaker Acoustic-suspension design with two 61/2-in polypropylene woofers and one 1-in dome tweeter. Features magnetic shielding; 12-dB/oct crossover. Power handling 220 W max; cross-over point 6,000 Hz; bandwidth 50-20,000 Hz; sens 90 dB; imp 8 ohms. Ebony-black finish 211/4 x 71/2 x 10 in; 15 lb...

NS-A202 2-Way Surround Speaker Bass-reflex design with 5-in woofer and %-in semi-dome tweeter. Power handling 100 W max; sens 91 dB; imp 6 ohms. Antique white finish. 11% x 8% x 3½ in; 4 lb... 900

DIRECTORY OF MANUFACTURERS

Acoustic Research, 330 Turnpike St., Canton, MA 02021-2703 (617) 821-2300

Acurus, 2 Elm St., Ardsley, NY 10502 (914) 693-8008

Adcom, 11 Elkins Rd. E. Brunswick, NJ 08816 (908) 390-1130

A/D/S/, One Progress Way, Wilmington, MA 01887 Advent, 25 Tri-State Intl. Office Ctr., Lincolnshire, IL 60069

(800) 477-3257 Aiwa, 800 Corporate Dr., Mahwah, NJ 07430

Allison Acoustics, 478 Stanford Ave., Danville, KY 40422

(606) 236-8298 Altec Lansing, P.O. Box 277, Milford, PA 18337

AMC, 1414 S. Fair Oaks Ave. Suite 7, South Pasadena, CA 91030 (818) 799-6396

Apogee, 35 York Ave., Randolph, MA 02368 (617) 963-0124

Aragon (see Acurus) Arcam. P.O. Box 381 Highland Lakes, NJ 07422 (201) 764-8958

Atlantic Technology, 343 Vanderbilt Ave., Norwood, MA 02062 (617) 762-6300

Audio by Van Alstine, 2202 River Hills Dr., Burnsville, MN 55337 (612) 890-3517

Audio Concepts/ACI, 901 S. 4th St., La Crosse, WI 54601 (608) 784-4570

Audio Design Associates. 610 Mamaroneck Ave., White Plains, NY 10605

Audiofile Home Theater. 1341 N. Bluegum Ave., Anabeim, CA 92806

Audio Innovations (see NHT) Audio Research, 5740 Green Circle Dr., Minnetonka, MN 55343-4424 (612) 939-0600

AudioSource, 1327 N. Carolan Ave., Burlingame, CA 94010 (415) 348-8114

Audire, 9576 El Tambor Ave., Fountain Valley, CA 92708 (714) 968-1236 Avid, Mill Complex "A," Box 192,

Mariboro, NH 03455 (603) 876-4400

Axiom, Hwy. #60, Dwight, Ontario P0A 1H0 (705) 635-2222

B&K Components, 2100 Old Union Rd., Buffalo, NY 14227-2725 (800) 543-5252

B&W, P.O. Box 8. North Reading, MA 01864 (800) 370-3740

Bang & Olufsen, 1150 Fechanville Dr., Mount Prospect, IL 60056 (800) 323-0378 Bedini, 7239 Valley St., Dalton Gardens, ID 83814

(208) 772-9207 Berning, 12430 McCrossin Lane,

Potomac, MD 20854 (301) 926-3371

BGW Systems, 13130 Yukon Ave., Hawthome, CA 90250 (213) 973-8090

BIC America, 883-E Hampshire Rd., Stow, OH 44224 (216) 928-2011 Bose. The Mountain

Framingham, MA 01701 (800) 444-2673

Boston Acoustics, 70 Broadway, Lynnfield, MA 01940 (617) 592-9000 Boulder, 4850 Sterling Dr.,

Boulder, CO 80301 (303) 449-8220 Bozak 539 Norwich Ave. Taftville, CT 06380

(203) 866-1510 Bryston, 57 Westmore De Rexdale, Ontario M9V 3Y6 California Audio Labs.

16812 Gothard St. Huntington Beach, CA 92647 Camber, 3700 Griffith #338,

Montreal, Quebec H4T 1A7 (514) 738-3225

Cambridge Audio (see AMC) Cambridge Physics, Mill Complex "C," Box 192, Marlboro, NH 03455 (603) 876-4400

Cambridge SoundWorks 154 California St., Newton, MA02158 (800) 367-4434

Canton, 915 Washington Ave. S., Minneapolis, MN 55415-1245 (612) 333-1150 Carrera, 1230 Calle Suerte. Camarillo, CA 93012

(805) 987-1312 Carver, P.O. Box 1237, Lynnwood, WA 98046 (206) 670-3429

Celestion, 89 Doug Brown Way, Holliston, MA 01746 (508) 429-6706

Cello, 112 E. 71st St., New York, NY 10021 (212) 472,5016

Classé Audio, 9414 Cote de Liesse. Lachine, Quebec H8T 1A1 (514) 636-6384

Cerwin-Vega, 555 E. Easy St., Simi Valley, CA 93065 (805) 584-9332

Clements, 25 Esna Park Dr., Markham, Ontario L3R 1C9 (416) 474 (990)

Clif Designs, 1602 Babcock St., Costa Mesa, CA 92627 (714) 645-8825 Coda, 9941 Horn Rd., Suite 150, Sacramento, CA 95827-1952

(916) 363-4653 Conrad-Johnson, 2800R Dorr Ave., Fairfax, VA 22031

Counterpoint, 2281 Las Palmas Dr., Carlsbad, CA 92009 (619) 431-5050

Creek, 108 Station Rd., Great Neck, NY 11023 (516) 487-3663

Crown International, P.O. Box 1000, Elkhart, IN 46515-1000 (219) 294-8000 Dahlquist, 601 Old Willets Path.

Hauppauge, NY 11788 (516) 234-5757 Day Sequerra (see Acoustic Research)

DB Systems, P.O. Box 460, Rinder NH 03461 (603) 899-5121 DCM, 670 Airport Blvd., Ann Arbor, MI 48108

(800) 878-8463 Definitive Technology, 11105 Valley Heights Dr., Baltimore, MD 21117 (410) 363,7149

Dennesen, P.O. Box 51, (508) 927-2521 Denon, 222 New Road, Parsippany, NJ 07054 (201) 575-7810

Design Acoustics, 1225 Commerce Dr., Stow, OH 44224 (216) 686-2600

DGX Audio Corp., 778 Marconi Ave., Ronkonkoma, NY 11779-7230

Digital Phase, 2841 Hickory Valley Rd., Chattanooza, TN 37421 (800) 554-7325 Dual, 19 W. 44th St New York, NY 10036

(212) 840-1976 Duntech, 111 South Dr., Barrington, IL 60010 (208) 526-1681

Dynaco, 125 Cubot Ct., Hauppauge, NY 11788 (516) 434-1200 Energy, 3641 McNicoll Ave

ough, Ostario M1X 1G5 (416) 321-1800 Fisher, 21350 Lassen St., Chatsworth, CA 91311-2329 (818) 998-7322

Forté, 7325 Roseville Rd., Sacramento, CA 95842 Fosgate Audionics, 8380 Balboa

vd., Northridge, CA 91325 (800) 343-9381

Fried Products, 1323 Conshohocken Rd., Norristown, PA 19401-2707 Genesis, P.O. Box 669,

Mintum, CO 81645 (303) 827-9515 Goldstar, 1000 Sylvan Ave., Englewood Cliffs, NJ 07632 (201) 816-2000

Haffar 613 S Rockford Dr. Tempe, AZ 85281 (800) 366-2349

Harman Kardon, 8380 Balboa Blvd., Northridge, CA 91325 (818) 893-9992

Hartley, 5732 Oleander Dr., Wilmington, NC 28406 (919) 392-0500 Heco, 694 Ft. Salonga Rd.,

Northport, NY 11768 (516) 261-7700 Heybrook, 5800 Overseas Hwy., Marathon, FL 33050 (305) 743-7130

Hsu Research, 20013 Rainbow Way, Cerritos, CA 90701 (800) 554-0150

Hughes, P.O. Box 7000. Rancho Santa Margarita, CA 92688 (800) 243-2733

Icon Acoustics, 13 Fortune Dr., Billerica, MA 01821 (800) 669-9662 Infinity, 9409 Owensmouth Ave., Chatsworth, CA 91311 (818) 407-0228

Jamo, 425 Huehl Rd., Bldg. 8, Northbrook, IL 60062 (708) 498-4648

JBL, 240 Crossways Park West, Woodbury, NY 11797 (800) 336-4525

Jensen, 25 Tri-State Intl. Office Ctr., Lincolnshire, IL 60069 (800) 323-0707

Joseph Audio, 2 Pine Ridge Rd., White Plains, NY 10603 (212) 724-2509 JRM. 3716 Broadway N.E.,

Knoxville, TN 37917-3120 (615) 688-6501 JVC. 41 Slater Dr Elmwood Park, NJ 07407

(201) 794-3900 KEF, 1701 Touchstone Rd. Colonial Heights, VA 23834 (804) 520-7200

Kenwood, P.O. Box 22745. ong Beach, CA 90801 (800) 536-9663

Kinergetics, 4260 Charter St., Vemon, CA 90058-2596 (213) 582-9349

KLH, 11131 Dora St., Sun Valley, CA 91352 (213) 875-0480

Klipsch, 8900 Keystone Cross Suite 1200, Indianapolis, IN 46240 (800) 554-7724

DIRECTORY OF MANUFACTURERS

Koss, 4129 N. Port Washington Ave., Milwaukee, WI 53212 (800) 872-5677

Mark Levinson, P.O. Box 781, 2081 S. Main St., Middletown, CT 06457 (203) 346-0896

Linn, 8709 Castlepark Dr., napolis, IN 46256 (800) \$46,6443

Magnepan, 1645 Ninth St., White Bear Lake, MN 55110 (612) 426-1645 M&K Sound, 10391 Jefferson Blvd., Culver City, CA 90232 (310) 204-2854

Marantz, 1150 Feehanville Dr., Mount Prospect, IL 60056 (708) 299-4000

John Marovskis, 2889 Roebling Ave., Bronx, NY 10461 Martin-Logan, 2001 Delaware St.,

Lawrence, KS 66046 (913) 749-0133 MB Quart, 25 Walpole Park S., Walpole, MA 02081 (508) 668-8973

McIntosh, 2 Chambers St. amton, NY 13903-2699 (607) 723-3512

Melos, 452 Lincoln Blvd., Middlesex, NJ 08846 (908) 302-2552

Memorex, P.O. Box 901021, Fort Worth, TX 76101 (817) 878-6700 Meridian, 3800 Camp Creek Pky., Building 2400, Atlanta, GA 30331

(404) 344-7111 Metaxas Audio Systems (MAS). 230 Rae St., Nth Fitzrov 3068.

(011) 61-3-486-2052 Mirage (see Energy)

Mission, 400 Matheson Blvd. E. #31, Mississauga, Ontario L4Z 1R5 (416) 507-0777 Mitsubishi, 5757 Plaza Dr., P.O.

Box 6007, Cypress, CA 90630-0007 (800) 843-2515 Monitor Audio, 902 McKay Rd.,

Pickering, Ontario L1W 3X8 (905) 428-2800 Motif (see Conrad-Johnson)

MTX. MTX Soundcraftsmen. 4545 Baseline Rd., Phoenix, AZ 85044

(602) 438-4545 Museatex, 5613 Burbank Rd. S.E., Calgary, Alberta T2H 1Z5 (403) 255-0665

NAD, 633 Granite Ct. Pickering, Ontario L1W 3K1 (905) 831-6333

NAIM, 1748 N. Sedgwick St., Chicago, IL 60614 (312) 944-0217

Nakamichi, 955 Francisco St., Torrance, CA 90502 (310) 538-8150

NEAR, 12 Foss Rd. Lawiston ME 04240 (207) 795-0609

NHT, 535 Getty Ct., Building A. Benicia, CA 94510 (800) 648,0003

Nikko, 2100 Trans Canada Hwy. S., Montreal, Quebec H9P 2N4 (514) 683-1771

Niles, 12331 S.W. 130th St., Miami, FL 33186 (305) 238-4373

Norman Laboratories, 1905 Atchison Dr., Norman, OK 73069 (405) 321-3205 NSM (see Heen)

NSM Loudspeakers, P.O. Box 326, (516) 486-8785 OCM Technology, 6509 Transit Rd., H-1, Bowmansville, NY 14026

Ohm Acoustics, 241 Tsaffe Pl.,

Brooklyn, NY 11205 (718) 783-1111 Onkyo, 200 Williams Dr.,

Ramsey, NJ 07446 (201) 825-7950 Optimus (see Radio Shack) Panasonic, One Panasonic Way,

iecaucus, NJ 07094 (201) 348-9090 Paradigm, P.O. Box 2410, Niagara Falls, NY 14302 (416) 632-0180

Paramount Pictures, 1195 W. Columbia St., Brea, CA 92621 (714) 257-3080

Parasound, 950 Battery St... San Francisco, CA 94111 (800) 822-8802 Phase Technology

6400 Youngerman Circle, Jacksonville, FL 32244 (904) 777-0700 Philips, I Philips Dr., P.O. Box

14810, Knoxville, TN 37914-1810 (615) 521-4316 Pinnacle, 255 Executive Dr.,

Plainview, NY 11803 (516) 576-9052 Pioneer, 1925 E. Dominguez St., Long Beach, CA 90810

(800) 421-1404 Polk Audio, 5601 Metro Dr., Baltimore, MD 21215 (410) 358-3600

ProAc, 112 Swanhill Ct., Baltimore, MD 21208 (410) 486-5975

Proceed (see Levinson) Proton, 5630 Cerritos Ave., Cypress, CA 90630

(714) 952-6900 PS Audio, P.O. Box 1119, wer Beach, CA 93483

(805) 481-4844 PSB (see NAD) PSE, 9755 Hamilton Rd., Eden Prairie, MN 55344-3424 Quad. 111 South Dr.,

Barrington, IL 60010 (708) 526-1646 Quasar, 1707 N. Randall Rd., Elgin, IL 60123

(708) 468-5600 Quicksilver, 5635 Riggins Court, Unit 15, Reno, NV 89502

Radio Shack, 700 One Tandy Center,

RCA, 600 N. Sherman Dr., Indianapolis, IN 46201 (800) 336-1900

(817) 390-3011

RDL Acoustics. 26 Pearl St. #15, Bellingham, MA 02019 Recoton, 46-23 Crane St.

Long Island City, NY 11101 (800) 223-6009 Reel to Real Designs. 3021 Sangamon Av Springfield, IL 62700

(800) 283-4644 Rock Solid Sounds, P.O. Box 8. North Reading, MA 01864 (800) 320-3242

Rotel, P.O. Box 8. North Reading, MA 01864 (508) 66L3820 Jeff Rowland, P.O. Box 7231.

Colorado Springs, CO 89033 Ruark (see Arcam) Sansui, 1290 Wall St. W.,

(201) 460-9710 Sequerra Associates, 792 Pacific St.,

Shahinian, 33 A&B Codarburst Ave., Medford, NY 11763 (516) 736,0033

Sherwood, 14830 Alondra Blvd., La Mirada, CA 90638 (800) 962, 3203 lignet, 4701 Hudson Dr.,

Stow, OH 44224 (216) 688-9400 Snell Acoustics, Snell Multin

(508) 373-6114

Sonance, 961 Calle Negocio, San Clemente, CA 92672 (800) 582-7777 Sonographe (see Conrad-Johnson)

Somy, One Sony Dr. Park Ridge, NJ 07656 (201) 930-7669 SOTA, 21 West New Ave. #2,

(800) 772,7682

Sound Dynamics (see Energy) Sound-Lab, 6451 Mou View Dr., Park City, UT 84060 (801) 649-0172

umdstream 120 Blue Rovine Rd (916) 351-1788

Speakerlab, 6307 Roosevelt Way N.E., Seattle, WA 98115-6616 (206) 523,2269 Spica, 3425 Bryn Mawr N.E.,

Albuquerque, NM 87107 (505) 883-6120 umiko, P.O. Box 5046,

Sumo, 5312 Derry Ave., Suites S & T, Agoura Hills, CA 91301

Superphon, 225 Oakes S.W., Grand Rapids, MI 49503 (616) 451-3868 Symdex, P.O. Box 359. Gloucester MA 01931 (508) 281-1115

Tannoy, 300 Gage Ave., Unit 1, Kitchener, Ontario N2M 2C8 (519) 745-1158

TDL, 1940 Blake St., Suite 101, Denver, CO 80202 (303) 295-3100 ac, 7733 Telegraph Rd.,

Montebello, CA 90640 Technics (see Panasonic)

Thiel, 1026 Nandino Blvd. Lexington, KY 40511-1207 (606) 254-9427 Threshold (see Forté)

Triad, 9106 N.E. Marx Dr., Portland, OR 97220 (503) 256-2600 Vandersteen, 116 W. 4th St., (209) 582-0324

Vector Research (see Carrera) Velodyne, 1070 Commercial St., San Jose, CA 95112 (408) 436-7270

Video Acoustics, 600 N. Sherman Dr., Indianapolis, IN 46201-2598 (317) 267-5000 VMPS, 3429 Momingside Dr.,

El Sobrante, CA 9480 (510) 222-4276 Westlake Audio, 2696 Lavery Ct.

Unit 18, Newbury Park, CA 91320 (805) 499-3686 Wharfedale (see TDI.)

Vemelie P.O. Roy 6660 Buena Park, CA 90622 (800) 492-6242

This directory includes only those manufacturers represented in the preceding Equipment Buving Guide, For more extensive product listings and a complete directory of audio and A/V manufacturers see Steren Ruyers Guide 1994 (\$4.95 at newsstands; \$4.95 plus \$1.75 postage and handling from Stereo Review Fulfillment Center, P.O. Box 7085, ick, NJ 08723; telephone 908 367-2900 for credit-card orders).



Free Information Service



Oet free literature on stereo products featured in this issue. Simply fill out your name and address, circle the number on the card that corresponds to the key number at the bottom of the advertisements and mail this card today.

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 94 85 88 67 88 89 90 19 29 39 49 59 69 79 88 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 116 126 138 146 156 166 17 68 169 170 171 172 173 174 175 177 178 179 108 108 118 128 138 148 158 168 178 188 199 109 119 128

STEREO REVIEW BUYER POLL

- In the past 30 days, have you purchased any audio or video equipment or accessories?
 A. □ YES B. □ NO → Thank You!
- 2. Which type(s) of equipment did you purchase in the past 30 days? A.

 Home audio B.

 Portable stereo C.

 Car stereo D.

 Video
- In the space below, please write in the type (speakers, car CD player, stereo VCR, etc.), the make, the model number and the price paid for each item purchased in the past 30 days.

TYPE	MAKE	MODEL	PRICE PAID

Indicate if you'd like to subscribe to STEREO REVIEW

4 Please eand me 12 issues (1 year) of STEREO REVIEW for 15 94 and hill me


PLEASE PRINT CLEARLY. Voice	after April 30,1994		
NAME	TELEPHO	ONE NO.()	
ADDRESS			SR 2941
CITY	STATE	ZIP	
		(Zip code must be in	cluded to insure delivery)



Affix Stamp Here The Post Office Will Not Deliver Without Postage

Stereo Review

P.O. BOX 1513 RIVERTON NJ 08077-7113

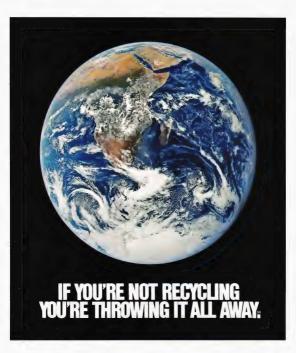

A little reminder from the Environmental Defense Fund that if you're not recycling, you're throwing away a lot more than just your trash.

You and your community can recycle. Please write the

Environmental Defense Fund at: EDF-Recycling, 257 Park Avenue South, New York, NY 10010, for a free brochure that will tell you virtually everything

you need to know about recycling.























EW REJESTE: Judgo sec.

is Unity Characteries to Mobils Fidelity,
plures the purveyers of simplify fits on
age to 1985. An elegent Concert Cotoring
ght selections, including Mola staples
passes and Rese Second.

NATURE'S ENCORE

For 17 years, Mubile Fidelity Sound Lub has been dedicated to making music sound its absolute best. Remaining at the carting alge of audio technology, we have taken our proprietary mastering techniques one step further with the revolutionary new GAIN System. We always work from original master tapes—with an unwavering attention to detail—because we love the music as much as you do. Hear the difference on the ULTRADISC II. The original limited edition 24-kgrat gold audiophile compact disc.

BEST OF MONTH

STEREO REVIEW'S
CRITICS CHOOSE
THE OUTSTANDING
CUPRENT RELEASES

The Velvet Underground: A Real Good Time



he 1993 reunion of the Velvet Underground, however short-lived, was no mere exercise in Sixties as no mere exercise in Sixties as not the state of the state of the state of the state of the farties spirit of the group that extended rock-and-collistion dark, avant-garde alleyways where it had never previously daed venance of the state of the

Sezing the reins in his no-nonsense manner, Velve's co-founder Lou Reed, who seems incapable of a false move at this point in his carret, rest-ly counts off a 12-2-4 littor of the read three of the read of the

Superfluous elaboration is kept to a minimum on "Live MCMXCIII." culled from a three-night stand at Paris's L'Olympia Theater last June; the band builds its sones on a sturdy skeleton of no-frills drumming and nervous, skittering rhythm guitar. John Cale's saturnalian viola scrapings provide classical col-oration on Venus in Furs and the ever-potent Heroin-a song that lavs out the allure of junkiedom without glamorizing it. Cale's staccato piano-pounding is central to I'm Waiting for the Man's droll depiction of a speed-freak's agitation. He also sings songs originally done by the band's late chanteuse Nico-Femme Fatale, All Tomorrow's Parties-and recites the exquisitely twisted short story The Gift with perverse gusto in his lilting, Welsh-accented voice. Sterling Morrison slips easily into his lead-guitarist role, engaging Reed in feisty dialogues. The Velvets keep it raw on "Live MCMXCIII": vou can smell the sulfur of a match and feel the heat from an untamed flame.

Most impressive of all is Reed's spirited attack on these songs. He bites into them, remaining faithful to the core arrangements but discovering something new in them three decades later. Whether boring into White Light/White Heat or dancing through Sweet Jane, he is on top of his game and in the right company to realize the best these songs have to offer. In fact, with the exception of an overly cute band intro (Velvet Nursery Rhyme) and an unredeemingly ragged version of I'm Sticking with You, the album is wellnigh perfect. You owe it to yourself to hear these pioneers revisit the iubilance and decadence of an unparalleled time and bring it all back alive.

Parke Puterbaugh

VELVET UNDERGROUND Live MCMXCIII

We're Goman Heve a Real Good Time Together: Venuin Fast. Gentlan Felling in Level. Venuin Fast. Gentlan Felling in Level. All Tomorrow's Parlices, Afferboars: Some Kinde Leury I'B B'er un Merror. Replaning to State Light: The Gift: Heard Hor Call My Name; Fermine Fasile; Hey Mr. Reals: Swort Leste My Names Physics: Well Light: The Call My Call My Name; Fermine Fasile; Hey Mr. Reals: Swort Leste Names Physics: Well Light: The Reals: Swort Leste State Light: Name Leste Light: The Most Legist Call March Legist Legist August To Dank Song: Societies with Name Enders. Best August To Dank Song: Societies with Name Herois: Parlice Aller Special Legist L

The Treasures Of Johann David Heinichen

ohann David Who?

It is amazing but true that, until now, a first-rate Baroque composer—worthy to rank with Vivaldi, Telemann, and even Handel—has remained in obscurity, his manuscripts languishing in dusty archives in East Germany. Johann David Heinichen was born in 1683 (making him two yealoder than Handel and Bach), studied

BEST OF MONTH



Musica Antiqua Köln

with Bach's predecessors in Leipzig, wrote operas for German and Italian theates, worked for the Prince of Anhaltates, worked for the Prince of Anhaltates, while), and condend the product of the Produc

Would Bash have been forgotten if he had gone to work in Dreuden? Dreuden was one of the grandest cities in Europe, but it was Catholic Germany salme of the star for the star

Heinichen was, above all, the episone of Baroque brilliance. No other music better evokes the grandeur and extravance of court life in the early eighteenth century, an impression enhanced by his entering the control of the control

lightful surprises: a bagpipe "pastorell," entire movements for winds accompanied by pizzicato strings, some gorgeous solo turns, an off-beat concerto for solo flute, oboe, violin, cello, and theorbo. Throughout, the familiar language of Baroque music is spoken in an original and personal way.

These pieces are superbly rendered by the excellent Cologne musicians under the direction of Reinhard Goebel, an early-music conductor who combines scholarship, technique, a knowledge of style, good humor, and deep feeling. Heinichen's music gives all the players a workout, a show and tell, not only in instrumental virtuosity but also in strict form and a kind of emotional deep breathing. The brilliant sound of these pieces is enhanced by the recording, which beautifully balances clarity, presence, and depth. Eric Saltman

HEINICHEN: Dresden Concertos Musica Antiqua Köln, Goebel

DEUTSCHE GRAMMOPHON ARCHIV 437 549 (two CD's, 137 min)

Cassandra Wilson Sings the Blues

n "Blue Light "Til Dawn". Cassardra Wilson slithers seducityl through standards like You Dow's Robert Johnston's Hellmound on My Trail in a deep river of blues. And to hear her do that is to wonder why critics waste superlatives on the strained the season of a Darae Schuur. Neither of these more acclaimed performers can hold a Grammy to Ms. Wilson when it comes to Jazz singing.—her improvisa-make a song and model it sensuously into take a song and model it sensuously into

In the past, Wilson has devoted a good portion of her albums to her own material. But on "Blue Light "Til Dawn," her ninth album and her debut on Blue Note, she makes a chameleonic trip through





They are blues legends whose music explodes with the most basic emotions and reverberates through rock, R&B, jazz and soul. Now you can explore a wide range of blues at its best with The Blues Experience from the Columbia House Music Collection.

Start With These 3 CDs for '9'

B.B. King — Live at the Regal (MCA). November 21, 1964 — a defining moment in blue

history. The master of electric blues gave the crowd at Chicago's Regal Theater an evening of seemingly effortless, yet truly transcendent music-making that summed up what modern blues is all about. "Mayor who cares about the unbuttoned pleasures of the blues will respond to this live abbum." — CD Review

Robert Cray — Strong Persuader (Mercury). A milestone album from the '80s. Cray's "reclaiming, for his generation, traditions tha are too important to disappear. And he's doing it right." — Rolling Stone

Clifton Chenier — Bayou Blues (Specialty/Fantasy). A fabulous collection of sydeco—the dancable, Creole-based blues from southern Louisiana — by its greatest exponent. Chenier "literally brought this music to the world from out of the bayous." — Rolling Stone

PLUS, you'll get a photo-packed booklet providing insightful background shoot these extraordinary artists and their gets runnie: — FREE. See the coupon for full details about this affordable, risk-free way to bauld your library of indimate. — and offer hard-to-find — blues album from a wide range of blues greats like Moddy Waters, John Mwajil, Dinah Washingon. Professor Longhait. Series Ray Vanghan, Koko Taylor, Louis Jordan, Albert King and more. Send for your first see: B.B. King, Robert Cray and Cliffon Chenier — TODOS.

THE BLUES EXPERIENCE Mail to: The Columbia House Music Collection, Dept. C82, P.O. Box 1134, Terre Haute, IN 47811

Professor Longhair • Stevie Ray Vaughan • Robert Cray Koko Taylor • and more

Dept. C82, P.O. Box 1134, Terre Haute, IN 47811

☐ YES. Please send me my first set in The Blues Experience, along with my FREE Program Guide. I may enjoy these recordings in either CD or cassette, as indicated below, risk-free for 14 days.

If I am not delighted, I may simply return the entire set for full credit and you will cancel my subscription — no questions asked. The Program Guide is mine to keep FREE, no matter what. I may keep the first set for just 59.99 plus 53.99 shipping and handling. Or I may return individual CDs or cassettes for a credit of 53.31 each.

Then approximately every eight weeks you'll send me another set in the series on a 14-day, risk-free audition basis for the regular price of just \$29.95 for each set of 3 CDs or \$19.95 for 3 cassettes, plus \$3.95 shipping and handling. I may return any albums I don't want for a credit of \$9.98 per CD or \$6.65 per cassette, or the entities et for full credit.

* THERE IS NO RISK. THERE IS NO MINIMUM NUMBER OF ALBUMS TO BUY. AND I MAY CANCEL MY SUBSCRIPTION AT ANY TIME.

ena my recoraings in:	u CDs	☐ Cass	ettes		
			778720	AM	AN
lame					
ddress					
ity					
cateZip_			Ģп	MBLA	
			24.5	USE	

on: We manye the right to reject any application or cancel any subscription. Applical see will be added to all orden. Please allow 4-6 works for delivery.

SEND NO MONEY • MAIL TODAY

BEST OF MONTH

material from sources as diverse as Van Morrison, Robert Johnson, Joni Mitchell, and Thom Bell. The accompaniments are also a departure, being largely acoustic and guitar-oriented and in general closer to the music Wilson absorbed in her formative years (born and raised in Jackson, Mississippi, she grew up during the Motown/folk-renaissance era and is no stranger to the blues). But this young lady does not resort to emulation; everything on "Blue Light" is superbly translated into her own style. Compare, for example, her version of Children of the Night to the original, mid-Seventies Stylistics recording, or her interpretations of Robert Johnson's Hellhound and Come On in My Kitchen-the sum and substance are intact, but she has distilled these songs and given them a timeless quality.

In short, Cassandra Wilson is a captivating, musical storyteller whose tales deserve the attention of discriminating listeners. Producer Craig Street has brought out the best in her, and one can only hope that their happy association Chris Albertson continues.

CASSANDRA WILSON Blue Light 'Til Dawn

You Don't Know What Love Is; Come On in My Kitchen; Tell Me You'll Wait for Me; Children of the Night: Hellhound on My Trail: Black Crow: Sankofa: Estrellas: Pedbone: Tunelo Honey: Blue Light 'Ti. Lawn: I Can't Stand the Rain BLUE NOTE 81357 (59 min)

A Real Roman "Tosca"

ecorded during performance at the Rome Opera in December 1990. RCA's new set of Puccini's Tosca brings a sense of reality and immediacy to the gripping music that studio recordings often do not achieve. Here, we are in the theater, caught up with the performers in the mounting intensity of the melodrama. We share in the applause, and occasionally we hear the prompter. We are delighted by the enthusiastic audience's demand for a repetition of the tenor's Act III aria, "E lucevan le stelle"-which, incidentally, is sung more effectively the second time around. The orchestral sound may lack the hyped-up resonance of more synthetic recordings, but it is the sound we would hear at the Rome Opera.

As Tosca, Raina Kabaiyanska employs her pure, silvery soprano to create a lyrical heroine. When amplitude of sound is called for, she delivers it in a well-focused and meaningful way. She sings the aria "Vissi d'arte" slower than usual. which only increases its intensity and despair. Throughout, she inflects the text for telling dramatic effect.

Luciano Pavarotti is in fine voice here as Cavaradossi, singing with attention to phrasing and with concern for characteri-



Luciano Pavarotti, Raina Kabaivanska

zation. His delivery of the two celebrated tenor arias is transporting, but there are small, individual touches as well that make his work particularly memorable. Baritone Ingvar Wixell is a properly

insinuating and despicable Scarpia. If his voice seems lighter than those of others I've heard, he nonetheless achieves all of the role's musical climaxes. His thoughtful delivery of the text, occasionally approaching parlando (speechlike singing), enriches his elegant limning of Scarnia's many-faceted personality. The rest of the cast are as effective in their briefer roles as are the three central artists.

The Rome Opera Chorus sings stirringly in the Act I Te Deum. The orchestra plays con amore; the introduction to Act III is most beautifully rendered. Perhaps this Tosca, conducted by Daniel Oren, may not be the most stunningly recorded version, but it rates cheers for bringing us the experience of the opera. Robert Ackart

PUCCINI: Tosca Kabaiyanska, Payarotti, Wixell, others: Rome

Opera Chorus and Orchestra, Oren RCA VICTOR 61806 (two CD's, 123 min)

NOW ON CD



POPULAR . THE DOORS: Waiting for the Sun.

DCC 1045, Remastered, 24-karat-gold audiophile version of the 1968 album.

MITCH RYDER AND THE DETROIT

WHEELS: Take a Ride! SUNDAZED 6007. Breakout! SUNDAZED 6008. Sock It to Mel SUNDAZED 6009. The first three albums (from 1966 and 1967) by the influential American R&B/hard-rock band. each fleshed out with bonus tracks.

- WILLIE AND THE POOR BOYS.

BLIND PIG/RIPPLE 5009, A 1985 roots-rock tribute featuring (among others) the Rolling Stones' Bill Wyman and Charlie Watts.

CLASSICAL · BACH: Suites Nos. 2 and 5 for

Unaccompanied Cello: other works. Mstislav Rostropovich. VANGUARD 4083. The early recording (circa 1956) that helped to introduce the great Russian cellist's artistry to the West.

· BEETHOVEN: Sonatas for Piano and Violin. Joseph Szigeti, Claudio Arrau VANGUARD 8060. These live, 1944 recordings from the Library of Congress "are monophonic, but, given the kind of

musicianship we are dealing with here, that becomes a mere quibble" (March 1972). · COPLAND: Billy the Kid; Rodeo. GROFÉ: Grand Canyon Suite, Gould. RCA 61667. Morton Gould and His Orchestra captured the spirit of these popular

works in "Living Stereo" (1957-1960). - TCHAIKOVSKY: Symphony No. 4; Francesca da Rimini, Bernstein.

SONY 47633. "... a gloriously exuberant performance . . . a humdinger of a test for any sound buff's playback system (Sentember 1976)



POPULAR MUSIC

JACKSON BROWNS I'm Alive ELEKTRA 61524 (47 min) Performance: Self-absorbed Recording: Very good

don't know that Jackson Browne ever studied the English Romantic poets or, if he did, whether he remembers William Wordsworth's notion that the greatest art comes from "emotion recollected in tranquility." I'd have to conclude, after listening to "I'm Alive," that Browne couldn't care less about Wordsworth's theory. That's because the singer-songwriter clearly recorded this album while still suffering from a pretty severe romantic disappointment. (Readers of the tabloid press may assume that Browne wrote these tunes after his affair with actress Daryl Hannah splashed down.) Although Browne sequenced the songs on "I'm Alive" to show the healing process of someone gradually learning to cope with such a breakup, it's clear that the men in these songs still long to be with the women in these songs. No matter how chipper or bouncy the melodies might be, the lyrics dump a lot of bitterness on top. Even in the songs that introduce a little of the understanding that comes with Wordsworthian tranquility (Two of Me. Two of You, Sky Blue and Black), Browne is clearly worn out from carrying an enormous torch. All this suffering and self-pity ultimately becomes tedious. And that, despite the deeply confessional nature of Browne's past work, is something he's never been before. RG

Jackson Browne: airl friend trouble?





JUDY COLLINS dy Sings Dylan . . . Just Like a Worr GEFFEN 24612 (52 min) Performance: High-minded Recording: Good

he idea of Judy Collins singing the songs of Bob Dylan seems to make sense. Why shouldn't one of the finest voices of the Sixties folk movement record an entire album of the premier writer of that generation? But barely a minute into this collection it becomes blazingly apparent just how far apart these two extraordinary performers have moved since they met thirty years ago.

The upshot is that Collins took the Sondheim route too many moons ago to know how to interpret these songs properly now. She may have a sedate rock band behind her here and there, and it's obvious Dylan's songs hold a lot of significance for her, both musically and lyrically. But on cut after cut, she virtually wrings clean all of Dylan's anger, bitterness. edge, and danger. The results range from the almost comical to the infuriating. In It's All Over Now, Baby Blue she sounds like Julia Child singing to a stuffed chicken, and in Like a Rolling Stone, she nearly succeeds in reducing the music of the counterculture to safe and blanded-out tunes she can perform as the quest of regional orchestras.

The best news is that vocally Collins has never sounded surer. But that does nothing to disguise the lounge-singer effect she brings to Sweetheart Like You. When she plows through that song, it's hard not to think of Lily Tomlin's perfect parody of a piano-har songstress. Col. lins might just as well have titled this album "Bobbie Jeanine Sings Dylan." Or maybe "guts" is a better word. A.N.

> PHIL COLLINS Both Sides of the Story ATLANTIC 82550 (68 min) Performance: Mushy Recording: Feir

his is the year of the sequel, with everybody from Meat Loaf to Michael Oldfield reprising former concepts on disc. Phil Collins antes up his own variant on a successful old

record in "Both Sides of the Story," which sees him returning to the stark, maundering tone of "Face Value." Producing himself, he also plays all the instruments and whines all the vocals, gazing deeply navel-ward for over an hour. Self-pity and hand-wringing over the state of the world preoccupy Collins, who largely wrote and partially recorded this disc in the hermitic confines of his bedroom studio. Mewling about the younger generation in We're Sons of Our Fathers in the manner of a self-absorbed, self-righteous forty-something. Collins sings, "When I was a boy, did we have more respect? / This world seemed a nicer place to be." Bring out the handkerchiefs.

The sones unfurl at a funereal pace as Collins moans and wallows over soggy syndrum tracks (why would a drummer as accomplished as he is program cretinously simple percussion tracks into a machine?) and meandering keyboards that sound like something you'd expect to hear emanating from the organ shop in a suburban mall. Only one song clocks in at under 5 minutes, and half a dozen run for over 6 minutes (so much for the artist/producer's ability to self-edit). As for the album as a whole, it packs all the emotional wallop of a stream of warm syrup drizzled over a bowl of mush.

> JOE HENRY Kindness of the World MAMMOTH 0057 (56 min) Performance: Convincing Recording: Good

oe Henry has a voice and a musical sensi-bility that are refreshingly down to earth and free of artifice. Descending from the same fertile folk-country loam that sprouted talents like John Prine, Guy Clark, and the Band, he is among the purest active proponents of roots music, plowing his way through a song at a sure, steady, and unhurried step. "Kindness of the World" is an album that rewards close study and repeated listening. The settings are spartan and the voice laconic, but these songs vield their nectar slowly but surely, drop by drop. In spare but telling language Henry evokes the romantic fatalism at the heart of the country-music mythos in She About Goes: "I can't make this story bend or head it off before it ends / We all have stories. I suppose / But in mine, she always goes." Most of these songs are cast in plaintive earth tones, with Henry's ungussied, matter-of-fact voice surveying a world of slumbering emotions as barren as fall's fallow fields. He mixes his elemental plainsongs with more rousing, arranged material like Fireman's Wedding and This Close to You, both of which are kicked to life by a full band including members of the Jayhawks. One or two more numbers like them wouldn't have hurt the album's pacing, but that's just

quibbling. Henry is a masterly songwriter who will convince you that less is often much, much more. P.P.

ELTON JOHN

DUETS ELTON JOHN

MCA 10926 (75 min) Performance: Middling

Recording: Okay istening to the fifteen duets on Elton John's Inewest album reminds me of the way people used to sing together on old TV variety shows. Hosts and guests would croon along with almost no sense of common feeling, because that's what hosts and guests were expected to do on such shows (that's how we got such surreal treats as David Bowie puh-rumpum-pum-pumming his way through Little Drummer Boy with Bing Crosby). The most bizarre example on "Duets" is Born to Lose, an old C&W weenie that Ray Charles made into a hit in the Sixties and that John sines here with Leonard Cohen. The combination of Cohen's foghorn recitation and John's chirpy high tenor is perverse. Unfortunately, it's also not very interesting, even on the camp level where it originated.

Everything else on "Duets" is done sincerely, including a blaring homage to God on The Power with Little Richard, a cutesy remake of Cole Porter's True Love with Kiki Dee, and a bland Don't Go Breaking My Heart with RuPaul. Only a couple of tunes catch fire: the country-scoper A Woman's Needs with Tammy Wynette and the catchy pop-soul of Go On and On with Gladys Knight. But they aren't enough to redeem the uninspired musical exercises found here.

RIC OCASEK Quick Change World REPRISE 45248 (53 min) ance: Split person **Recording: Varies**

t's a Cars album! It's an uncommercial solo album! It's two (click), two (click), two albums in one! Ric Ocasek has divided "Ouick Change World," his fourth solo record, into a "left side" and a "right side." The right side opens the disc with six manicured angst-pop tunes that could have easily come from any Cars album back when they were New Wave's gift to the charts. The left side is more like



Ocasek's personal indulgence, one of those anti-commercial labors of love he's always threatened to turn loose on the public. Admittedly, the transition from the cushiony

pop of the right side, where he used an outside producer, to the spectral agit-pop of the selfproduced left side is jarring, and the two parts don't really cohere. But that is precisely the point, and "Ouick Change World" will leave you wondering, as it almost certainly does Ocasek, why palatable pop and personal expression must be mutually exclusive. As for the tunes, the right side is a self-contained mini-album whose appealingly minimalist trappings-the steady rat-tat-tat of a snare, former Car Gree Hawkes's nursery-rhymesimple synth figures, Ocasek's own clipped, economical delivery-compare favorably with the Cars' hit-filled "Heartbeat City," rising to a peak with the airy whipped-cream pop of She's On. In the left side, Ocasek probes the darker labyrinths of modern life, inventorying our world of woe with disembodied images in What's on TV and the title track: "Well the blue denim dream in the victim line is staring at the tube riding on the flatboard toward the tin town tomb." (Say what?) The sound of the left side is less polished.

aimed at unnerving the mind rather than pleasing the ear. It reaches a crescendo with the paranoia of Hopped Up, a manic rant about red cars and blue shoes that fades with Ocasek chanting, "I'm a real live wire, I get hopped up." By this time, old Cars fans may have hopped out, but that's their problem. After having cast half of "Quick Change World" in the commercial mold of his old band, Ocasek has clearly claimed the second half of the ride as his own-love it or leave it.

ALAN PARSONS Try Anything Once

ARISTA 18741 (60 min) Performance: Ambitious

ording: Audiophile's delight rogressive-rock fans, take heart. Progrock vet Alan Parsons is back with his first album since 1987. It's also his first solo album ever, as he's officially dropped the word "Project" from his artist moniker. That's a mere technicality, however, as this album is very much in the vein of its predecessors, with a shifting cast of vocalists, moody instrumental soundscapes, and AOR-friendly songs that

Boxes! Boxes! Roxest

ed-set CD retrospectives are such a glut on the market these days that worthy ones can easily be overlooked. Here are a few that shouldn't be.

OTIS! THE DEFINITIVE OTIS REDDING RHINO 71439 (four CD's)

Sixties soul at its peak, presented (save for the live cuts on the fourth disc) in the original mono as nature intended. Hear it and be ennobled.

THE BLUES: A SMITHSONIAN COLLECTION OF CLASSIC BLUES SINGERS

SONY SPECIAL PRODUCTS 101 (four CD's)

A comprehensive and exquisitely programmed collection, with more than a hundred blues helpings by everybody from Blind Lemon Jefferson to Ray Charles.

JANIS JOPLIN

COLUMBIA/LEGACY 48845 (three CD's) Superbly remastered retrospective look at



numerous unreleased live performances from all stages of her too-brief career.

ELVIS PRESLEY From Nashville to Memphis-The Essential 60's Mosters, Vol. I

BMG 07883 66160 (five CD's) Traditional wisdom has it that Presley spent the Sixties churning out nothing but ghastly songs for even worse movies. Here's an anthology that, convincingly, suggests otherwise.

Moiten Gold-The Anthology

A&M 31451-8456 (two CD's)

Macho-dumb lyrics notwithstanding, these guys were rock's most innovative power trio (in a weirdly minimalist way) until the arrival of the Police nearly a decade later. All their best stuff is included here.

ask the age-old question "What's it all about, Alfie?" You know-time, life, love, death, eternity, and so on.

"Try Anything Once" comes attired in the most aurally distinguished wrapping imaginable, as super-engineer Parsons embeds every note in a lush sonic matrix with painstaking precision. Occasionally it all gets tethered in cliches (Back Against the Wall, I'm Talkin' to You) and hourse-voiced entreaties full of the sort of arty bombast that piques the pointy heads and poison pens of critics. But when former 10cc-stalwart Eric Stewart's wispy vocals claim a quieter number such as Siren Song or Wine from the Water, or when Parsons and crew sail off on some evocative instrumental tangent, "Try Anything Once" is airily enjoyable. Even harder-rocking tunes like Turn It Up have something to offer-namely, a measure of conviction and competence that's been in short supply in the FM-rock larder lately. Complete with one of those wondrously strange Hipgnosis album covers whose style will be recognizable to anyone who's ever gazed at a Pink Floyd jacket, "Try Anything Once" does a sound job of keeping the progrock banner waving in the Nineties.

PEARL JAM Vs. EPIC 53136 (46 min) Performance: Torrential Recording: Okay

S ome thirty years after the British invasion split the youth of America into two camps-Beatles fans and Stones fans-the Seattle rush threatens to do the same thing with Pearl Jam and Nirvana. The historical parallel, however, isn't perfect. Pearl Jam and Nirvana both have angst-ridden, dysfunctional people at the heart of their music, but Eddie Vedder and Kurt Cobain, respectively, have different ways of acting out their pain. Compared with the noisy, demanding Cobain, Vedder is a sensitive, somewhat shy person who just happens to stand in front of a rock band. And where Cobain is content to snray the world in general with his bile. Vedder seeks specific retribution, going directly for the peo-

ple who cause the hurt. Of course, the musical differences between Pearl Jam and Nirvana are major as well. Nirvana is basically a punk band with very few musical pretensions beyond slamming out the riffs, while Pearl Jam is a conventionally proficient hard-rock band with several aces up its sleeve. Compared to "Ten," Pearl Jam's debut, the new "Vs." shows a cleaner matching of riff with intention. The tangy, Stonesian hooks of Glorified G are perfect for the song's, er, unenlightened attitudes toward guns. And the lunging, desperate attack of electric guitars in Rearviewmirror goad Vedder toward a cli-

mactic epiphany. Although the targets of his rage are easier to spot, Vedder is nearly as opaque on this album as he was on "Ten." On Rearviewmirror, however, the object of his rage and the release of his emotion come brutally into focus together but only, literally, in hindsight. "Saw things," he screams, "clearer . . . once you were in my rearview mirror." Thanks to the increasing clarity of Vedder's troubled vision, and the band's growing ability to match that with powerful music. Pearl Jam shows the potential to go deeper with its music. As long as the rock of recovery continues to thrive, Eddie Vedder and company promise to be leading the way, step by step.

ADAM SCHMITT

REPRISE 45265 (60 min) Performance: Prómisina

Recording: Good magine an alternative act willing to extend its introspective, unguarded aura in the direction of commercial-minded FM guitarrock, and you might wind up with something like Adam Schmitt's second album, "Illiterature." His Replacements-meets-Cheap-Trickgoes-grunge omnibus lacks only a few key ingredients-a pinch of wit, more relaxed production-before Schmitt becomes a real contender. The guitar and drum tracks are a little too blocky and inelastic, confining some fine tunes in a sonic chokehold, and the compression-heavy sound packs an artificial punch that the songs themselves could have conveyed if anomached less strenuously. But there's plenty of power and passion to be found in songs like Three Faces West, where carefully layered guitars and limpid bass tones frame an affecting vocal from Schmitt. He's not quite there yet, but on "Illiterature" he's awfully close

Margo Timmins Is Listenino

What CD's is the Cowboy Junkies' lead singer and alternative-rock



this very minute? BRUCE SPRINGSTEEN

COLUMBIA 38358 This is the record that most influenced my life. When we first started to play we listened to it all the time . . . those simple arrangements, and the way he could make all those stories believable"

BOS DYLAN

Nashville Skyline COLUMBIA 09825

"I can sing every one of these songs. I always take it in the car when I go on a trip-why, I don't know. I think the duet with Johnny Cash [Girl from the North Country] is the greatest duet of all time . . . it almost doesn't work, but it does,"

EMMYLOU HARRIS Rivebird

REPRISE 25776

"I play Emmylou all the time, but this is the one I'm into right now. All the songs are really beautiful, and the album's really dark, which I like."



SWEETHEARTS OF THE RODEO Rodeo Waltz SUGAR HILL 3819 (43 min)

Performance: Back from the ashes Recording: Very good hen sisters Janis Gill and Kristine Ar-

nold-otherwise known as Sweethearts of the Rodeo-recorded their debut album in 1986, they were surprised to see five of the singles become Top-20 hits. After that, they were mystified as to why their careers quickly lost momentum. If this record is any indication, the Sweethearts had obvious conflicts with their former record label about the direction of their sound. Here, instead of radioready New Country hits, the Sweethearts present old-time country folk and traditional acoustic music, all done up with breathtaking, hand-in-glove harmonies.

Gill, who produced the album, has a nearly faultless sense of song selection, drawing littlerecorded material from Doc Watson (Deep River Blues), Robbie Robertson (Broken Arrow), and Gordon Lightfoot (Steel Rail Blues), and dusting off Johnny Cash's Get Rhythm to give it a bluegrass cast. She also displays maturing songwriting abilities, especially with

the penetrating There One Morning. Whether pursuing a snaky, Judds-like acoustic-meets-country sound with Long Time Gone, or renovating Hank Locklin's country standard Please Help Me I'm Falling, the Sweethearts make it clear that they are far more serious about crafting affecting and timeless music than scoring hits. They also earn points for turning mandolinist Sam Bush. fiddler Stuart Duncan, and Janis's husband, Vince Gill, who supplies all the fancy guitar parts, loose to create their own musical visions. This is an album of spectacular if quiet beauty. It should garner lots of respect in the music community, and a myriad of fans among acoustic-music devotees. A delight from start to finish.

LUTHER VANDROSS Never Let Me Go

EPIC 53231 (47 min) Performance: Romantic Recording: Clean

Gifted with a luxuriantly smooth, black-velvet voice, Luther Vandross also possesses the sheer technique necessary to embellish his vocal interpretations with the bubbling arneggios and other distinctive "Lutherisms" that make his singing consistently enticing. He's at his romantic best on "Never Let Me Go." his first album in two years. As usual, he favors his own material, most of it formulaic. But this time out he has pulled himself up 5 POPULAR MUSIC

several notches. There are some lapses into triteness, such as Love Is on the Wav (Real Love), but other selections, such as Too Far Down, merit their lush arrangements and intensely expressive treatment.

Vandross devotes one track to a soul standard, and as usual it accounts for the most dazzling performance. This time it's a medley. opening with a tender treatment of the Bee Gees' How Deep Is Your Love and a brief instrumental sliver of the Spinners' Love Don't Love Nobody, leading to an utterly rapturous rendition of the old Johnny Ace hit Never Let Me Go. It's a fitting conclusion to an album that, from a vocal standpoint, represents soul balladry at its best.

Collection



STONE FREE: A TRIBUTE TO JIMI HENDRIX REPRISE 45438 (64 min) Performance: Okay

Recording: Okay out halfway through Manic Depression. which comes about halfway through this tribute to Jimi Hendrix, Seal and Jeff Beck kiss off all traditional notions of paying homage to the legendary singer-guitarist. Through pure unfettered expression, they make us forget all about Hendrix, which is the best tribute anyone could make to a musician who exploded the boundaries of rock-and-roll. Next to the freshness of Seal and Beck, the other big names on this album sound just like themselves (Eric Clapton, Buddy Guy), just like Hendrix (Living Colour, Spin Doctors), or some wishy-washy combination of the two (everybody else). If you didn't already know Jimi Hendrix was one of the greats, you might



was a pretty dull fellow.

JEANIE BRYSON

I Love Being Here with You TELARC JAZZ 83336 (56 min) Performance: McCorklely Recording: Excellent

ou probably never heard Dizzy Gillespie speak of his daughter, Jeanie, but here she is, singing gently through a program that is a

pleasant blend of rare and common fare. The liner notes compare her style to those of Sarah Vaughan, Dinah Washington, and Carmen McRae, but if you want to know who Bryson really sounds like, think of Susannah McCorkle with a touch of Peggy Lee. While she lacks McCorkle's engaging timbre and ear for the perfect off-beat tune, Ms. Bryson can hold her own, and she makes her recording debut in superb company: Kenny Barron, Wallace Roney, Vic Juris, Steve Nelson, and tenor saxophonist Don Braden are among the musicians who contribute mightily to this nearhour of mellow sounds.

PETER DELAHO VERVE 602 (68 min)

rmance: A bright start Recording: Very good

n recent years. New York has been a magnet for young jazz talent from every corner of the country, but it also has its home-grown musicians, and pianist Peter Delano is among the better ones. As his debut album bears out, he is a musician of remarkable maturityremarkable because he was only sixteen when he recorded it. The album presents Delano in a variety of moods and instrumental configurations. The program is equally diverse, be-

THE ISOKINETIC ADVANTAGE

WHAT MAKES US BEST, MAKES YOU STRONGER.

Matches 100%

Of Your Effort. The NordicFlex Gold® strength conditioner features an exclusive

isokinetic resistance system that automatically matches your natural strength curve during each exercise. You're always working 100% of each muscle to get your most effective workout in the shortest amount of time.

Fliminates The Source Of Pain And Injury.

NordicFlex Gold uses a positive-only isokinetic resistance system to virtu eliminate the stress on tendons and connective tissue. Unlike other strength training systems that offer negative resistance. NordicFlex Gold offers:

- Minimum after-exercise soreness and pain - so you stick with your workouts! Shorter recovery time between
- workouts so you can reach your goals faster! Reduced risk of injury - so you can push yourself harder

and faster without worry! **Guides You Through A Safe.**

Focused Workout. Whether experienced or new to strength training, you don't need to worry about proper form. NordicFlex Gold uses ergonomically correct linear motion - recommended by exercise physiologists --- to ensure you are in proper position to avoid



has the patented

isokinetic

resistance system

the "had form" that can cause injuries. It also maintains the proper form and technique that isolates, shapes and tones your target muscle groups. You get the most out of each workout.

Achieves Fast Results. From your first workout, you're

building a better, leaner, more toned body. In fact, tests show that participants in our 12-week strength training program increased their energy levels and achieved up to:

- · 33% increase in strength 8% decrease in body fat
- · 10 lb. drop in weight · 3" loss around the waist

Each NordicFlex Gold system is backed with 18 years of NordicTrack fitness expertise — available to you in our exclusive workout video. and a comprehensive training manual with a daily workout guide - to meet your fitness goals.

Now you can get The Isokinetic Advantage" in your home. Models are priced from \$699.95 to \$1299.95. To find out how NorticFlex Gold can make you stronger faster,

call 1-800-441-7890 Ext. 1K1B4 for a free video and brochure.

BEST OF ALL



38-BAY IN-HOME TRIAL

ame	☐ Send me a FREE brochure	☐ Also a FREE VHS videotape	
reet		State	Zio
none (Truck for: A CMI Commons + All rights reser	and Marketins made	nor shown is restored as 9



Front panel A/V inputs control	•Wireless ren
5179°	(TEA AGV10
Technics SA-QX13	*16
-100 wattuchannel remote	*19
AudioSource CD Rec 30 Wat/Ch Receiver, 6-CD Char	ceiver 22

ics SA-GX550

CA SA-GYASO

4259™

*349**

*399**



90-watts/channel Class-AA •
direct input +6-input source
Soeaker A/B switch *Loudn
Active servo power supply
**2 99°5
nice (TEC

299 9⁵⁵	(TEC SUVERC)
Gemini PVX-20	*129
AudioSource Preamp	
AudioSource Amp O	ne +240
Gemini PVX-160	
-Fower Amp. 125 wats/channel Carver PM-1201	
-Pro Power Amp, 450 watts/channel Consense PML-600	CAL

Cassette Decks



+3-D progr echo +32 A	isc CD changer ram *Karacke mi: *Remote *Auti MFM presets *3	with 8X, 30 selections play with digital or reverse cassetts Way speakers
Cas -AMTL Pan	\$449° to MS-102CD A CO, Casseta, rench asonic SC-DI A Onal Casseta, CO Pa	*149*
HMF	A, Dual Cassette, CD Pla	*249*

er DCS-993

famaha CC-70W

JVC MXCPs







*299™



This Month's



ern Mandolin Quartet Pan American Journeys

Ray Lynch: Nothing Above My Shoulders

WH 11133per CD. \$11.99
Nightnoise: Shadow of Time
WH 11130per CD.\$11.99
Will Ackerman: Retrospective
WH 11121per CD.\$11.99
Scott Cossu:
Stained Glass Memories
WH 11120 per CD.\$11.99
Windham Hill -The First 10 Years
WH 10952-CD Set.\$21.99
Liz Story: My Foolish Heart
WH 11115 per CD.\$11.99
George Winston:
Winter Into Spring



Plotary front loading design *MASH 1- DIA converter *32 track programming *Pl control *Wireless remote control
\$249 ⁹⁵ (REC SLPONZY)
Teac PD-495 -150.8 overaming wheth \$99 Technics SL-PG340 -4129 -4129

Teac PD-495	
+18-bit, 8x oversamping, remote	*99
Technics SL-PG340	
-MASH, 1-bt B/A, 20-track programming	1129
Teac PDD-880	
-5-dec Changer, 18-bit, remote	.*169
Technics SL-PD847	
45-disc Changer, MASH 1-b4, remote	*199
JVC XLM-409	
+6+1 disc Changer, remote	·219
Flaher DAC-2403	
x24 John Vertical Inadian Channer	*279



≥ 199°	(AVC TOWISSE)
Teac W-410	1000
+Dual Cassette Deck, Doiby B	99
Technics RS-TR23	2
-Cual Cassette, auto-rev. Doiby B	CMX Pro*159"
-Dual Anto-rev, Dolby B/CASS-Pv	, Inchas 249**
Alwa ADF-810	
+3 head, Dolby BICHK-Pro, remo	. *269™
*Dual Auto-reverse, Dolby & Chip	Pro. pitch 449**
4-motors, 2-heads, Doiby S & B	CKK-Pro *699**



D.I. Carriera	
qualizer/Digital Sound Processor	*259°
Technics SH-GE90	
Titles SVL4	*239°
Uly Auto Quartz Turntable	179
fechnics SL-QD33K	*179°
Sandard Mount Carridge	*129°



\$39995/pair

13 may, 10" monter, bass refexpay \$119*6 Bose 101
-Vin Indoor/Outdoor Speakerspai *149**
Recoton W-440
-Wrotess Speaker System
Advent A1052 45th Annersay Speakers, 17 worder pair \$259*6
Cerwin Vega AT12



. \$ 4 0 095/pair

. 199	
Design Acoustics P	88W
10-Inch Subwooler	*219**
Martic Technology Pattern 3 oc Powerd System	100
3-pc Fowered System	*249**
Pinnacie PN8+/Oak 2 way, 5 wooler, dual diaducts	
2 way, 8" wooler, dual diaducts	249"
3-way, 8" wooler, titanium tweeter	*299**
1-Way Pro Studio Monitors	*599**
JBL XPL-160	****

799⁹⁵ *159** *179** ini DS-824 *199** Fostex X28 *449° *1199° CALL

al CD Pla



SE HABLA ESPANOL

gy 1548R *139**

CALL US TOLL FREE FOR ITEMS NOT LISTED IN THIS AD



FAX 718-497-1791





Super Specials!



Sleepless in Seattle (LTX) ... tenace II Society on: The Bruce Lee Story \$34.95 \$29.95 PS or LTX)

\$29.95 New On VHS



Dracula

\$16.95

\$16.95

\$16.95

\$16.95

ly Joel: Shades of Grey rid Bowie: Videos

Beyerdynamic Audiophile Headphones

\$279°5



VISIONS/VIDEO PROCESSORS/CAMCORDERS/VIDEO CAMERAS/BLANK VIDEO TAPES/ IPUTERS/PRINTERS/MONITORS/COMPUTER SOFTWARE/FLOPPY DISKS/COMPUTER S

\$299°5 Samsung VR-3703 *169^M JVC HR-J200 *199° Aiwa HVF-VX1000 1299≈ *329™

Go Video GV-3050X

Sony SLV-750H CALL

*799°

*119° v CFD-454 *139°

c RX-DS10 *159° *179° ny CFD-560 1229M *299°

\$19995

or HD-435



2579°5 *249* arp VL-L30 CALL

499™ 629∞ CALL MY KY-20TS29 CALL



ny DT-120 DIGITAL



\$499° PSN 958130201 Casio SE-4600 \$59[∞]

Sex ELS4KPL *99× *179° 1199¹⁶



39 .142" *149** ell 'Oggetti AR-650 ds//dec Rack, 4 shekes, black *249™ design Penta *299™ "CALL

124™ porex AVE *29™ *34M *69™ Tork AF9925 *79™ *149°



Or Call Toll-Free 1-800-221-9181 J&R Music World Department SR0294 59-50 Queens-Midtown Exp Maspeth, NY 11378

WORLD

*679° CALL US TOLL FREE FOR ITEMS NOT LISTED IN THIS AD

*399™

49∞

\$59™

179°

*119°

*149**

*199°



ginning with Elephants in the Sky, a brisk, boppish Delano composition, which has him leading a first-rate group including saxophonists Gary Bartz and Michael Brecker, trumpeter Tim Hagans, and drummer Lewis Nash. Then it's on to a superb blend of more originals and such familiar tunes as I Remember Clifford and Autumn Leaves. The latter, a trio performance with Nash and bassist Jay Anderson, leaves a good impression of Delano's improvisational skill. But Piano Improvisation 1, a lyrical solo flight, is probably the most convincing evidence of this young man's musicianship. The set concludes with Reminiscence, a somber, absorbing set of notes played by Delano and Brecker. This is an impressive debut, and it's probably only an inkling of

Dial (800) 621-8042

JOHN McLAUGHLIN

Time Remembered VERVE 861 (4) min)

Performance: Semi-electri Recording: Excellent

te late Bill Evans was a romanticist who delicate piano style combined remarkable lyricism with real substance. His music was gentle and sophisticated and it could hasten a heartbeat by an open fire, but it was never romantic in the syrupy sense nor did it even remotely have anything in common with the tinkling of New Age. Bill Evans communicated on a much higher level, and with his music he reached some of the most fertile minds in jazz. One dedicated devotee was guitarist John McLaughlin, who first heard Evans with Miles Davis and later joined Davis's group himself. "Time Remembered" is McLaughlin's tribute to Evans, an all-guitar set that in a wonderful, gentle way reflects the soul of Bill Evans. I can think of no better remembrance of this extraordinary artist.

LEWIS HASH

Rhythm Is My Business EVIDENCE 22041 (63 min) Performance: Swinging

Bacording: Excellent
orn in Arizona, rarely fertile ground for
jazz. Lewis Nash came to New York
twelve years ago to work for Betty Carter.
Since then, he has matured into a stellar jazz
drummer who has graduated to more fitting

associations, "Rhythm Is My Business" is Nash's first release as a leader; recorded in 1989, it has the now-well-known Mulgrew Miller working the piano to the max and the still-much-neglected Steve Nelson mingling on vibes. Both share Lewis's rhythmic qualities, so the swinging becomes quite intense at times (as on Nelson's Pranayama), and that's when the album hits its peaks. There are also some winning low-key moments here, including Omelette, a memorable collaboration between Ron Carter (who visits for this track only) and fellow bassist Peter Washington. When You Return is the only track that sent my mind drifting off to other things: it's a bland tune with a matching vocal by Nash's wife, Teresa, who I hope put more life into the three R&B albums she has made for the Japanese market

Ease On

AUDIOQUEST 1014 (61 min)
Performance: Hot and wholesome
Recording: Full-bodied
or since Jimmy Smith cooked up a storm

on a series of Blue Note and Verve albums have I heard such seething organ solos as Jeff Palmer produces on his new album, "Ease On." With Arthur Blythe's alto sax, John Abercrombie's guitar, and Victor Lewis's rock-solid drumming, this formidable quartet generates music that could animate granite. It's a volcanic mix, with Blythe's alto at times.

Fax (800) FAX AUDIO



Sinatra's "Duets": Doobie, Doobie, Don't

ou already know the idea behind Frank Sinatra's new album: The Chairman of the Board remakes some of his signature tunes with the original arrangements and some famous guests-Barbra Streisand, Liza Minnelli, Carly Simon, Tony Bennett-singing along. And you've probably heard the wordof-mouth on the results: Sinatra sounds like Joe Piscopo doing Sinatra, it's obvious the star and his collaborators weren't in the studig at the same time, and some of them-12's Bono, Gloria Estefan-have about as much business doing standards as Sinatra would have doing heavy metal. All that's true, I'm afraid, but it doesn't prepare you for the unholy mess that is "Duets."

Sure, the audible reality here is that Sinatra is simply years past it (and not just in vocal quality-the magisterial phrasing of yore seems ossified, too). And yes, the celebrities-even the ones like Bennett who are on Sinetra's stylistic wavelength-are essentially extraneous; thanks to the impersonal, uninteractive way "Duets" was recorded, they're more or less reduced to filling in the blanks



Sinatra deigned to leave for them. But all that's really beside the point-it's the concept behind the album that is monumentally wrong-headed. These songs were never intended to be call-and-response duels between superstars; they were written (by people who knew what they were doing) to be sung by an "I" to an audience. And so what we get here is not some sort of historic musical meeting of the minds but rather a Wagnerian apotheosis of the celebrity musical numbers from old Fifties TV variety shows, the kind of show-biz exhibitionism that regularly matched up Odd Couples from Hell like Dinah Shore and Tennessee Ernie Ford.

That such an undertaking (and aesthetic) is rightfully obsolete these days seems not to have occurred to anybody involved with the making of "Duets," but it's why, despite the high-profile talent involved, the album is pretty much unlistenable. On every level-beginning with the tacky Leroy Nelman cover-it was born kitsch. Steve Simela

PRANK SINATRA

The Lady Is a Tramp: What Now My Love: I've Got a Crush on You: Summer Wind. Come Rain or Come Shine: New York, New York: They Can't Take That Away from Me: You Make Me Feel So Young: Guess I'll Hang My Tears Out to Dry/In the Wee Small Hours of the Morning; I've Got the World on a String; Witchcraft; I've Got You Under My Skin; All the Way; One for My Baby (And One More for the Road). CAPITOL 89611 (46 min)



SAMMAN'S ELECTRONICS CUSTOMER SERVICE: 201-696-6531

actude manufacturer's standard accessories & U.S. Warranty, All units are factors

sealed. Shipping & Handling are non-refundable



TS Stores TV w/ Surround Sound

31' Stereo TV w/ Pletus in Pleture

PINNACLE ADVENT

Screen TV. Pro Logic Receiver, 4 Satellite Speakers, 1 Center channe eaker, Sub-woofer, and a Hi Fi VCR. The System can be

further enhanced with a Lase Combo Player and DAT Deck for the highes quality Audio and sharpes 9999

Video reproduction



BOOKSHELF AUDIO



MINI SYSTEMS

31 (35) 31 (37)



ART GARFUNKEL

Up 'Til Now COLUMBIA 47113 (42 min)

A sort-of career retrospective by folk-rock's eternal choirboy, and on its own wimpy terms quite enjoyable. Best moment: The Breakup, in which Garfunkel and Paul Simon crack themselves up contemplating just that. Biggest surprise: a remake of Since I Don't Have You that kicks Gums N'i Roose butt.

SAM KINISON

Live from Hell
PRIORITY 53863 (54 min)
Final thoughts from the quintessential
Eighties comedian (translation; a reaction-

soaring over a crater overflowing with bubbly hot staff. And the blues are everywhere, weaving in and out of the proceedings with various
in and out of the proceedings with various
in the control of the control o



REGINALD R. ROBINSON The Strongman

DELMARK 6622 (67 min)

Performance: Elegant

Recording: Excellent

ike most teenagers, Chicagoan Reginald R.

Robinson loved music. But while the other

neighborhood kids were hipping and hopping to rap, he turned to something completely ary loudmouth). Funny in spots, but frankly the guy wasn't fit to wipe Bobcat Goldthwaite's leather jacket. S.S.



PUTUMAYO PRESENTS THE BEST OF FOLK MUSIC:

CONTEMPORARY FOLK
PUTUMAYO WORLD MUSIC/RHINO

71448 (55 min)

A very nice sampler featuring more-or-less acoustic acts, from old-timers like Joan Baez to youngsters like Indigo Girls and Mary Black. Fave rave: B.B. King Was Wrong, a witv anti-bluss by Jersey folkie

SIXTY MINUTE MEN-THE BEST OF BILLY WARD AND HIS DOMINOES

John Gorka.

RHINO 71509 (55 min)

Billy Ward and the Dominoes had three great lead singers (the other two were Clyde McPhatter and Jackie Wilson), which sort of makes them the Yardbirds of

different. At thirteen, he not only developed a fascination for ragtime—he decided to play it. Seven years later, that is something young Mr. Robinson does very well. And while it is quite extraordinary, in this electronic age, to find a young African-American performing turn-of-the-century music, it is even more amazing to learn that he also composes it.

Robinson is debut album. The Strongman, "
is a delight die et of solors his proposed in a
solor proposed in the solor solors and solor solors and solor solors and solor solors and solor solors. The solor solors are solor solors and solor solors and solors and solor solors and solor solors and sol

Wallin' at the Vanguard VERVE 677 (62 min) Performance: Perfection

Becording Pleas senses

it is one of the finest drummens to come

it is one of the finest drummens to come

it is one of the finest drummens to come

it of he post misscal associates includes

Coleman Hawkims, Bud Powelf, Charle

Coleman Hawkims, Bud Powelf, Charle

And And Taylor continues to demonstrate what

a fine musician he is. His new "Wallin' at the

Anguard" is no throwway session, but nith
er a thoroughly musical, well-thought-out live

at the powelf of the powelf of the powelf of the powelful of the powe

Fifties R&B. This overdue greatest-hits collection also proves that Nick Tosches was right when he called them "the most brilliant and the classiest of the rock-androll vocal groups." Terrific stuff, surprisingly well recorded.

JIMMY WERE Suspending Disbellef

Suspending Disbeller ELEKTRA 61506 (51 min)

ELEKTRA 6/396/61 min Remember By the Time I Get to Phoenix and the other groundbreaking hits Jimmy Webb wrote in the late Sixties? Then do yourself a favor and avoid this collection of overwrought MOS, including Elvis & Me, the touching yet pathetic story of a meeting between the songenier and the King, who Webb believes he could have saved "for swire." Right, Jimmy—and how about Miles Davis? Janis Joplin? Jimi Hendrix. Annie Earhart? Annie Earhart?

VILLOW PILLS VOLUME 1 BIG DEAL/CAROLINE 9003 (70 min)

BIO DEAL CARCULES WOSI (Num). Twenty-one tracks from power-pop heaven, courtesy of the magazine of the same aname: a great new Dwight Twilley tame, a quiet stunner by the Cowsills (that's right, the Cowsills), and glorious recent efforts by Tommy Keene, Shoes, the Rubinoos, 20 yo, Adam Schmitt, and New York legend Mark Johnson, among other worthies. Veriet of the Cowsills, and Company of the Cowsills (the Cowsills), and the Cowsills (the Cowsills).

details that really distinguishes Arthur Taylor's Wailers from normal club fare. If they keep this up, they will be an all-star quintet before we know it. C.A.

MIL TORMÉ The Great American Songbook TELARC JAZZ 83328 (64 min) Performance: Compelling

Recording Han semote Mainchal's Pub is not one of New York's Mainchal's Pub is not one of New York's Pub is not one of New York's papears there the club's bad vibes seem to be put on hold. Torme has a marvelous way with a song, but he also handles an andience better than any other singer I can think of, and it's no accident that most of his recordings are live performances. The latest of these is "The Great American Songbook," recorded with a

big band at Michael's Pub in late 1992. Tormé's velvety voice is as compelling as ever, and his timing as perfect; he has the swing and improvisational skill of a fine jazz instrumentalist, and his love for the material he sings is made abundantly clear with every phrase. It is difficult to believe that this man made his debut as a big-band singer over fifty years ago when he joined Chico Marx's orchestra. Even more remarkable is the fact that he continues to improve with age. Because his taste in songs is impeccable, and the composers who intrigue him are most often American. one might argue that every Mel Tormé set is a great American songbook. So what's different about this set? Happily, nothing-it's Tormé at his best, scatting ferociously and singing tenderly to excellent accompaniments by pianist John Colianni and a well-oiled ensemble of brass and reeds CA







FREE MAGAZINE.

BBG

Nothing more to buy, ever! (see details below)

THIS SPECIAL OFFER WILL NOT BE
REPEATED IN 1994
AFTER FEBRUARY.
ER EXPIRES FEBRUARY 28.



- Exclusive CD
- Plus FREE CD buying service Here's Good News

If You Enjoy Classical Music!

The BBC announces this generous free offer to introduce its new, critically acclaimed service to American audie

It's a complete monthly guide to classical music... enjoyable writing, magnificent photographs, over 100 CD reviews and ratings, plus an exclusive CD that features an entire composition - most often performed by the internationally recognized BBC orchestras.

Now You Can Be Among The First To Experience It This is an exclusive offer. Neither the magazine nor the CD are available any-

where else. But you can evaluate this remarkable program's BBC Music Magazine, and enjoy its accompanying

classical compact disc today... without obligation. (Over, please...)

For this special offer, call toll-free

Dept. BBX or mail the reply card. BBC and the BBC logo type are trademarks of the

A COMPLETE MONTHLY GUIDE TO CLASSICAL MUSIC

Check here if you prefer your monthly recordings on cassette.

Horszowski

Mail to: BBC Classical Music Service Box 61099, Tampa, FL 33661-1099 Please send my FREE copy of BBC Music Magazine plus my FREE CD. Bill me for just shipping and handling. Thereafter, I will receive the BBC Music Magazine and an exclusive CD every month. As a subscriber to this social offer. I will always be guaranteed the low monthly orice of \$2.98 plus shipping and handling for as long as I remain an active member in the program I have no obligation to buy anything ever and I may cancel at any time. BBX

(nlease print)

Address

Have you bought anything by mail □ 1 Last 6 months □ 2 Never In Canada: \$5.98 Canadian plus shipping and handling and GST.

information, reject

ship. Limited to nev family. Local tax, if any, will be added.

FREE MAGAZINE FREE CD With nothing more to buy, ever!

AFTER FEBRUARY

You may order CDs reviewed

in the BBC Music Magazine through the BBC Classical

Music Service, if you wish. A

convenient way to shop but

Add New Excitement To

The monthly CDs alone will

add the cachet of exclusive,

superbly recorded special

performances to an already well-balanced collection. For

the beginning classical

library, they become the

nucleus to build around. And

the BBC Music Magazine's reviews and ratings of the lat-

est CDs, and its features and

columns will greatly enhance

your knowledge and appreci-

Satisfaction Guaranteed!

Simply phone toll-free or fill

out the reply card for your free copy of the BBC Music

ation for classical music

3. A Personal CD

never an obligation.

Your Collection!

Buying Service.

A One-Of-A-Kind Concept Unlike Any Before! Neither a club nor a "sampler" service, this program brings you...

1. The BBC Music Magazine With its broad scope and lively approach, this beautiful new maga zine has enormous appeal for longtime collectors as well as to those just developing an interest in classical music. It covers all aspects of classical music - live, broadcast, and recorded - in equal depth. Over 100 luxurious pages of photographs, features and columns... plus over 100 new CDs reviewed and rated each month. Indubitably, a complete guide

to classical music! 2. An Exclusive Full-Length CD.

With every issue of the BBC Music Magazine you will also receive each month, a fulllength Compact Disc that is not available anywhere else. an entire featured work (not a compilation of short excerpts) recorded to the highest quality classical standards and handsomely packaged in a jewel case... not in a

paper sleeve.





Magazine and free CD. Listen to the CD and read the

magazine, if not satisfied for any reason, return them with no further obligation.

A COMPLETE MONTHLY GUIDE TO CLASSICAL MUSIC



BUSINESS REPLY MAII

POSTAGE WILL BE PAID BY ADDRESSEE

BBC

BBC Classical Music Service Box 61099 Tampa, FL 33661-1099

NECESSARY IF MAILED

GUARANTEED PRICE PROTECTION.

Subscribe to this special offer and you will always be guaranteed the low price of \$2.98 plus shipping and handling every month, for as long as you remain an active member in the program.

For this special offer, call toll-free

CLASSICAL MUSIC

NEW RECORDINGS
REVIEWED BY
ROBERT ACKART,
RICHARD FREED, DAVID
HALL, GEORGE JELLIHEK,
ERK SALZMAN, AND

BACH: Advent Contatos Monteverdi Choir; English Barrouse Soloists, Gardine

Monteverdi Chour;
English Baroque Soloists, Gardiner
DG ARCHIV 437 327 (61 min)
Performance: Confidently personal
Recording: Excellent

ach's three cantatas for the first Sunday in land" I and II (Nos. 61 and 62) and "Schwingt freudig euch empor" (No. 36)-are often startlingly personal, full of adventurous compositional techniques that were perhaps too idiosyncratic for his larger works. They are so haltingly odd at times that they push even the formidable Monteverdi Choir to its limits. In No. 36, one of the chorale melodies is superimposed over a pulsating beehive of wind writing. No. 61 opens with what amounts to a French overture and has a stunning recitative in which only gently knocking pizzicato strings accompany the baritone's description of knocking at the door of enlightenment. No. 62 has an odd duo recitative for soprano and mezzo. In all three, the final chorales are strangely truncated (the longest is 45 seconds).

The emotional range is also remarkable, even by Bach's high standards. All three can-tatas use the "Nun komm. der Heiden Heindle etst." (Now come, Savior of the heast-darken standard etst. (Now come, Savior of the heast-darken standard etst. (Now come, Savior of the heast-darken standard etst. (Now come, Savior of the heast-darken standard etst.) (All the heast-darken sta

John Eliot Gardiner's Bach performances have sometimes been too driven, unyielding, and impersonal, but he meets these pieces on their own terms. He gets the usual fine singing and playing from his chrous and orchestra as well as from an especially attractive lineup of solists—the soprano Nancy Argenta, the mezzo Petra Lang, the tenor Anthony Roffe Johnson, and the barvince Oel 18 ir. D. P.S.

BARTOK: Violin Concerto No. 2; Rhapsodies Nos. 1 and 2

Takezawa; London Symphony, Thomas RCA VICTOR 61675 (63 min)

Performance: With a broad brush Recording: Lush

where is nothing hard-edged about Kyoko Takezawa's performance of Bartok's laborate and big-scale Second Violin Coocerto, dating from his prime creative period in the mid-1990s. Finchas Zukerman's reading, with Leonard Slatkin and the St. Louis Symphony (also on RCA), is two minutes faster in the opening movement and in the slow movement, though Takezawa's finale is closert to the

MILSTEIN BY THE BOX



A musical legend was commemorated this

fall with releases of some of his greekest recordings. EM Classies." The Art of Nathan Milistein." is a midprice six-CD set honoring the virtuous violinist, who city in December 1992. It includes recordings of the great Romantic violin concertos, works from the Barque period, and many violin encores, all recorded between 1955 and 1968, at the height of his powers.

composer's designated timings. Her decidedly Romantic retarnent does work initially, but Zukerman has a definite edge when it comesto wastaining line and continuity in the slow-movement variations, and there is also more bite in his finals. If you prefer your Bartok on the lush side, however, Tazekawa will be much to your taske, and the spacious recorded sound fits her style perfectly. Michael Tilson Thomas, who knows his way around this music, elicits fine playing from his London forces.

The CD is filled out with the two violin rhapsodies, both substantial works in Bartok's folk manner. In them Takezawa gives full rein, and with splendid effect, to her own rhapsodic proclivities.

D.H.

BEETHOVEN: Plano Sonata No. 32, Op. 111; Six Bagatelles, Op. 126; Rondo a Capriccio; Für Elise Anatol Ugorski DEUTSCHE GRAMMOPHON 435 881

(70 min)
Performance: Wayward sonata
Recording: Good

wenty-seven minutes for the arietta of Op.

111? That's the usual timing for the entire sonata. What accounts for the distension here

is not a matter of repeats, but simply Anatol Ugorski's somewhat haphazard idea of organization. He shows little grasp of, or concern for, Beethoven's grand design, but seems content just to noodle about in the arietta's variations, ignoring the elements that define their charac-

ter as well as the strands that connect them. It may be that Upporkis just un more comfortable with more modest structures. He is pointed you communicative, in fact downspitc charming, in the shorter pieces here, Für Eller is goven an aristoceralis frame that makes list more genuinely affecting, and the Rondo o Capriccio (known as "The Rage over a Lost Propulsing half of the program. But of course appealing half of the program. But of course on CPV has a swell as the constant are available on CPV has consecuently a consecuent of the course of the program. But of course on CPV has a swell as the constant are available to consecuent of the consecuence of the course of

BRITTEN: Peter Grimes

Rolfe Johnson, Lott, Allen, others; Chorus and Orchestra of the Royal Opera House, Covent Garden, Haitink EMI 54832 (two CD's, 144 min)

EMI 54832 (two CD's, 144 min)

Performance: Orchestrally superb

Recording: Excellent

nard Haitink gives his customary:

Bernard Haitink gives his customary atten-tion to the musical structures in this everfascinating opera about an outcast fisherman who may be equal parts poet and murderer, and he makes Britten's evocations of the seain some ways the main protagonist-unusually picturesque. The clean articulation and rhythmic precision of his reading, along with the resourceful recording, bring the opera vividly alive. Apart from the sound effects, one gets a strong sense of stage movement from the singers. Sarah Walker shows us the anguish behind Mrs. Sedley's drug addiction as well as the usual bitchiness. Felicity Lott's strong, passionate Ellen Orford is an unusually equal match for the rough, bossy Peter Grimes, Thomas Allen, as Balstrode, and Stafford Dean, as Swallow, are also welcome in their secondary roles.

The only thing that keeps this recording



Russian Romantics



the Seasons, the last and surely the strongest of Glazunov's three expansive ballet scores, is one of those things we have ome to know on records but never hear in our concert halls. Raymond Leppard has sen conducting portions of it here and there, and last season Edo de Waart and the innesota Orchestra did it in full: Telarc has lust issued the Minnesotans' recording of it. together with a second Glazunov work that is likely to be more of a discovery to most

listeners, and a very happy one. De Waart's performance of The Seasons Is solid and pleasing, if not quite a match for Ernest Ansermet's glorious 1967 recording, particularly in the concluding "Autumn" section. Ansermet omitted the thoroughly dispensable "Satyr" spisode in that section, but he showed more drive in the main portion (it's a bacchanal, after all) as well as a ater sense of contrast in the voluptuous 'Petit Adaglo." and his midprice London disc is treasurable, too, for his winning way with Glazunov's two delicious concert waitzes and the early tone poem Stenka Razin, Viadimir Ashkenazy's recent uncut Seasons with the Royal Philharmonic, also on London, is in the same class, and more sumptuously recorded. But the appended Scienes de Bailet on De Waart's disc is sheer

This lesser-known suite, composed in 1894, just after the concert waitzes and just before Raymonda, the first of Glazunov's ballets, was not designed for choreographic treatment but is simply a brilliant and ingratiating sequence of eight stylized dence pieces. Glazunov recycled the second one, "Marionnettes," in his ballet Ruses d'Amour; among the other numbers are a mazurka, an evocative "Danse Orientale," and a dreamy waitz that brings together his gifts for melody and color on a truly inspired level. There have been few recordings of this work since the first one, made by Eugene Goossens in London nearly sixty-five years ago, and none from any source that has made so strong a case for it as this new one.

If there is any cause for complaint, it concerns the lack of track or index access to Individual sections of the music and the skimpy documentation, which falls below Telarc's commendable norm. The sound. though, is fully up to Telarc's standard, and the flat-out irresistible performance of Scènes de Ballet makes the good one of The Seasons a duplication easy to beer.

Moscow orchestra has made its debut on the RCA Victor label in music of Borodin, some of which would have been lost to us without Glazunov's productive efforts. it was Glazunov who completed and orchestrated the two movements Borodin composed for what was to have been his Third Symphony, and he shared with his mentor Rimsky-Korsakov the responsibility for similar attention to the operatic masterwork Borodin left unfinished. Evgeny Systlanov conducts the State Symphony Orchestra of Russia in the Third Symphony. two numbers from Prince Igor-the overture (put together and orchestrated by Glazunov) and the "Polovtsi March" (orchestrated by Rimsky)-and the large-scale First Sympho-

ny, which Borodin finished on his own Svetlanov's extremely persuasive performances of the two seldom-heard symphonies clearly surpass all other CD versions. though the edge over his own 1983 recording of the Third (when his orchestra was called the U.S.S.R. Symphony) on Melodiya is a narrow one, and those who have that earlier all-Borodin disc will cherish it for his beautiful account of the Petite Suite and his poetic one of in the Steopes of Central Asia. But the Prince Igor Overture in that collection, recorded back in 1963, is no match for the new one, either musically or sonically, and the big First Symphony makes the new disc self-recommending. RCA has labeled it, by the way, "The Russian Five, Vol. 1," but has said nothing about scheduling the implied follow-ups with music of Rimsky-Korsakov, Mussorgsky, Balakirev, and Cul-or more Borodin. Such a series could prove to be an open-ended affair, and that would be all to the good if the subsequent installments come up to the level of this one.

GLAZUNOV: The Seasons; Scènes de Ballet Minnesota Orchestra, De Waart TELARC 80347 (66 min)

Richard Freed

BORODIN: Symphonies Nos. 1 and 3; Prince Igor, Overture and Polavtsi March State Symphony Orchestra of Russia, Svetlanov RCA VICTOR 61674 (72 min)

from topping the previous two-Britten's own with Peter Pears (London) and Colin Davis's with Jon Vickers (Philips)-is Anthony Rolfe Johnson, who proves that it takes more than talent, voice, and intelligence to sing the title role. His lyrical tenor can't encompass the character's extremes in mood the way Vickers did, and he lacks the plint of madness essential for a convincing characterization. Nonetheless, he sings much of his role beautifully, and the revelations offered by the rest of the cast and by the orchestral playing are more than enough reason to purchase this set. D.P.S.

ELGAR: Cello Concerto; Enigma Variations;

Froissart Overture Cohen: Royal Philharmonic, Mackerras ARGO 436 545 (77 min) Performance: Splendid conce

Recording: Excellent obert Cohen, the soloist in Elgar's late, bittersweet Cello Concerto, sets the tone at the very start, opening with a mournful, world-weary sigh that leads into a reading of the first movement more elegiac than usual but all the more affecting for it. His treatment of the transitional cadenza at the end of the movement is a particular pleasure, and the moto perpetuo-style scherzo is scintillating. The wistfulness of the slow movement would melt a heart of stone, and its effect is intensified by the contrast with the introductory passages of the final movement, by turns brusque and deeply melancholy. The melancholic element reaches its peak in what amounts to an epilogue, only to be rudely brushed aside by a "let's get on with it" conclusion. With splendid support from Charles Mackerras and the Royal Philharmonic and first-rate sound all the way, this version of the concerto ranks among the three or four hest on record

I wish I could say as much for the purely orchestral works here. The Froissart concert overture, Elgar's first major orchestral score, was meant to evoke the spirit of medieval chivalry. The orchestral sonorities are brave but the musical substance is thin. As for the often recorded and performed Enigma Variations, certain elements in Mackerras's otherwise fine and sensitive reading put me off, such as an intensely introverted treatment of the very opening pages and a curious lack of surge at the climax of the famous "Nimrod" variation.

> FALLA: El Amor Brujo; Seven Spanish Folk Sonas Nafé; Lausanne Chamber Orchestra. Lopez-Cobos DENON 75339 (44 min) Performance: Seductive

Recording: Seductive l Amor Brujo ("Love, the Sorcerer") was first performed in Madrid in 1915, almost immediately after Falla returned from Pariswhere, under the influence of the Impressionists and the École de Paris, he had somehow learned to be, at one and the same time, a European modernist and a musically traditional Spaniard.

The big-orchestra version of this music, written for both the ballet and the concert hall, is the one everybody knows. But here is the original theater version, more like a one-act

CLASSICAL MUSIC

rarruela than a ballet. There are spoken scenes between characters, instrumental backgrounds, and a chamber- or theater-size scoring. Even the story is different, simpler and more direct: Our heroine, betraved by an unfaithful gypsy lover, gets her revenge by snaring him in a black-magic love spell-or. more to the point, she discovers how to get results by playing hard-to-get sexy. Oddly enough, the program notes recount the story of the later version; fortunately, there is a complete libretto

The orchestral version will undoubtedly always be more popular; yet the original version has a dramatic power and directness of its own, and it certainly has a place on the CD shelf. It is, above all, a tour de force for a dramatic mezzo-soprano who can dance and

act as well as sing

I don't know about her dancing or stage acting, but Alicia Nafé, an Argentine long resident in Spain, has a seductive voice and the kind of simple, cool intensity that suits this material. Denon has added her attractive performances of the Seven Spanish Folk Songs (in the neat and effective orchestrations by, of all people, the Italian avant-gardist Luciano

Berio). Jesús Lopez-Cobos's view of Falla has a certain classical reserve in the midst of color and passion, but I happen to think that this suits the composer's dignified hispanicism very well. The passion is there, but instead of erupting at the surface, it stays just beneath, informing everything that goes on without pushing the passion buttons too hard. In short,

playing hard-to-get sexy. MOZART: Symphonies Nos. 35, 36, 38-41

WEBERN: Works for Orchestro Cleveland Orchestra, Dohnányi LONDON 436 421 (three CD's, 221 min)

Performance: Excellent Webern Recording: Rich hristoph von Dohnányi's performances of Mozart's six great Viennese symphonies demand three discs. To fill them out, London had him record the far less familiar orchestral works of Webern, including the Six Pieces (apparently the original 1909 version, not the standard 1928 revision), the Five Pieces, and the Passacaglia, Symphony, and Variations. It was a fine idea, and Webern's music is presented with all the brilliance and conviction one could hope for. If the combination works less well than it might, it is only because, after the engaging "Haffner" and "Linz" Symphonies on the first disc, the rest of the Mozart performances may not hold listeners' attention long

enough for them to get to the Webern. All the Mozart readings are big and bluff. but, except for the two already noted, they lack the charm and warmth of those by, say, Bruno Walter and his contemporaries. Somewhat more surprisingly, they are also shy of the level of elegance, and even of clarity, that gave such character to Herbert Blomstedt's sturdy performances with the Dresden State Orchestra on Denon. Dohnányi offers us little more, I'm afraid, than the sturdiness.

The Cleveland Orchestra, of course, is superb at delivering whatever is asked of it, and the Webern performances are such altogether persuasive realizations that they might well expand the audience for the composer. R.F.

HONO: Il Canto Sospeso Soloists; Berlin Radio Chorus; Berlin

Philharmonic, Abbado MAHLER: Kindertotenlieder; ich Bin der Welt Abhanden Gekom Lipovsek: Berlin Philharmonic, Abbado

SONY 53360 (70 min) nce: With passionate co Recording: Very good

his recording of Il Canto Sospeso ("Suspended Song") by the Italian avant-garde composer Luigi Nono (1924-1990) is from a 1992 concert staged by Claudio Abbado and the Berlin Philharmonic to protest the renewal of violent xenophobia and racism in Germany A "modern passion," as the annotator calls it, Nono's 1956 work was based on letters written by members of the anti-Nazi German resistance during World War II on the eye of their brutal execution. Most of the victims were young and in normal times would have been intent on self-realization. Their resistance mission indeed led to the "suspension," and finally the termination, of their dreams

Intellectual comprehension is not necessary for Nono's complex twelve-tone work to convey its message of bitterness and hope. Comprehension from the heart is aided in this case

NewWest lectronics

specializing in: we proudly offer:

> advent . a/v receivers infinity •

 amplifiers pioneer •

 Id players hafler •

carver • cd players

hitachi •

 speakers panasonic ·

monster • processors

sonv • · projection tv

technics • Icd projectors dahlauist •

 camcorders aiwa .

hk · ibl · ivc · tv • vcr govideo •

 car audio premiere ·

 accessories sharp •

free shipping

- honest pricing
- friendly service



call toll free from the US or Canada

mon-fri 6:30a-6:30p • sat 7:00a-5:00p • sun 7:00a-4:00p

a division of Clarity Electronics LTD . 4120 Meridian • Bellingham, WA. 98226 •



• 5 Disc Carousel Changer • 3 Beam Pickup • 20 Track Programming • Sear • Skip • Direct Track

Access • Remote ARVER SDA-380" ... ARVER SDA-490T ... ENWOOD DIPR-5750 ENON DCM-440" ... ENON DCD-550" ... ISHER DAC-2403 ...

250 Watts Per Channel Power Amplifier
 2 Channels - Solid State Design
 Fully Regulated High Current High
 Voltage Power Supply
 4 Amplifier And Speaker
 549

DCOM GFA-555 Midl* 200 Watt Power Amp DCOM GFA-585* 200 Watt MONO Block Amp DIGO SQUINCE SS THREE MK II. Sound Processor. ARVER 1774-15* 300 WING Power Amp ARVER 1774-15* 300 WING Power Amp

DSPE1000* ... 180 Wat AV Integrated Amp ... 799 DSPA1000* ... Digital Surround Processor ... 1199 DSPA2070* ... Top Of The Line Processor IN STOCK

TFM-35

_299 CALL _189

RY-V670-260 Watt Pro Logic Receiver • Digital Dolby • Pro Logic Surround • Pre-Main Coupler • Sleep Timer

Coupler • Sleep Timer (30, 60, 90, & 120 Min's) • • Remote Control ver _400 ver _849 jic .BEST c .PRICE ver CALL CARVER HR 875 DEMON AVR-3000 DEMON AVR-300° JVC RX-309VTN

NAD 705" PHILIPS FR-940 II... SHERWOOD RX-4010R SHERWOOD RX-6030R





ADF-810 Three Head Cassette Deck • Auto Tape Selector • Dolby® B&C NR HX Pro • Auto Rec-Mute • Mem Rewind & Repea • IC Logic Feather Touch Controls • RecPlay

Timer Standby Dolby - B&C NR & HX PRO 3 Head Cassette Deck
Double Cassette Deck
4600 Dolby** S / 8&C&HX PRO

CARVER TOR-1550° DENON DRW-510°... DENON DRW-840°... HARMAN KARDON T HARMAN KARDON T JUC TI-WAM

6100°.... LIPS FC-910 C TA-W410

MINI DISC . DCC . DAT



Q-90 High End
 Way
 Floorstanding eakers 8" Woofer 8" Midrange • 1" Tweete

150 Watts



HILIPS CDC-935

5-Disc Carousal CD Changer • Dual 1-Bit D/A Converters
 20-Track Program • Random Play
 Favorite Track Selection • Remote
 • Discs Changeable During Play

JBL • 2 Way Bookshell Design Speakers

• 5114 Woofer • 1/2" Tweeter Handles 80 Watts Cont. • 5 Yr. Warranty

9996



DENON

AVR-2000 290 Watt Pro Logic AV Receiver • 5 Channels With Dolby* Pro Logic And DSP • Optical Class A Circuitry
 CD-Direct Modes • Adjustable Delay • 6 Audio Inputs 2 S-Video Outputs
 Programmable Remote Controls IN STOCK

TDK NF-C09

• New Snap-On Digital Noise Absorbers Eliminates Sound Muddying Interference Generated by Digital Processing Circuits in CD Players and DAT Recorders

POLK AUDIO THORE TD-180 MKIII CS-150 Home Theatre Center

 Belt Drive Turntable
 33¹⁰, 45, 78 Speeds
 Auto Cue • Auto Return
 Anti Skating Adjustment Channel Speaker • Handles 100 Watts • 4¹⁰* Woofers • ¹⁰* Tweeter • Shielded





TH AVE

Mail Orde

FOR INFO CALL 201 467-0100 EXT DAY DELIVERY AVAILABLE ASK YOUR SALESPERSON FOR DETAILS









@ HITACHI

Haffer

arman/kardon SHARP

PHILIPS TEAC

SANSU RCA ®

TOSHIBA

Quasar.

Museatex

Sherwood Sherwood

FISHER.

KLH

SONY

D BOMCA ETC...



TV • On Screen

Displays • Stereo









CANON UC-1.

RCA PROSES







845STI

 Radar/Laser Integrated • Super Wide Band • X,K,KA • AV Alerts





14X IMAGE STABILIZER



New York Retail New Jersey Retail 1030 6th Avenue 331 Route 4 West

New Jersey Retail 22 Route 22 | pringfield, NJ 0708 OPEN 7 DAYS • SUNDAY 11-6 MONDAY-SATURDAY 10-9

New York, NY 10018
BETWEEN 38" 6 39" STREET OPEN 7 DAYS
JYMYF 6 SAT 9-6:30 • THUR 98 • SUN 11-5
TY OF NY CONSUMER AFFAIRS LICENSE 80999

OPEN 6 DAYS A WEEK We Welcome VISA, MASTERCARD, AMERICAN EXPRESS, DISCOVER & MACRIVEE DEBIT CARDS. Next Day Service Available, ®+ Registered Trace Not Responsible For Typographical Errors. Limited Quantities - Pictures are for Illustration Only. * Cornex With 1 Year and Associate Elect



because the music, sung in Italian, is preceded by a set of readings, in German, from the letters themselves, and another set serves as "intermezzo."

While the program notes strain to spell out an affinity between the chilling horrers of Nono's work and the Mahler songs on the CD Alaso recorded in concert.] I feel that they're the mazzo-toprano Marjana Lipoweck offers a supremely moving account of the oft-recorded marzo-toprano Marjana Lipoweck offers a supremely moving account of the oft-recorded of Children'), then surpasses it with a glorious performance of the contemporaneous song performance of the contemporaneous song to the the Mahler's the contemporary of the contemporaneous song to the the surpasses it with a glorious to the world'), the next-to-last of Mahler's the surpasses of Mahler's the surpasses of Mahler's the surpasses of th

five settings of poems by Friedrich Rückert. Naturally, Claudio Abbado, his Berlin Philharmonic, and the Berlin Radio Chorus gave their all at these concerts, and the recorded sound, especially in the Mahler songs, is both effective and affecting. D.H.

> PEVUELTAS: Rodes; Sensemayá ORBON: Concerto Grosse GINASTERA: Pampeane No. 3 Simón Bolívar Orchestra, Mata DORIAN 90178 (70 min)

Performance: Energetic Recording: Close, gentle he Mexican Renaissance, most famous for its painters, also had its outstanding comnosers. The hest-known was Carlos Chavez but the most extraordinary and original was Silvestre Revueltas, who created a handful of powerful works, most notably Sensemayá, an incantatory tone poem that translates a work by the Cuban poet Nicolás Guillén into a dynamic and hypnotic orchestral language. Unfortunately, most of Revueltas's brief output is to be found in his film music, and most of that is considerably less interesting than his concert music. The exception is the music for Redes ("Nets"), which, in the composer's own concert version, shows a more intimate and sympathetic (but no less genuine) side to his genius than the big, noisy, powerful orchestral works like Sensemavá.

Julian Orbon is the youngest and least Latin American of the composers on this CD. Born in Spain in 1925, he was brought up in Cuba and lived for many years in this country. He is represented by a rich, powerful, and extremely attractive Neoclassical concerto for string quartet and orchestra.

The Argentinian Alberto Ginastera started life as a nationalist, and although his later work evolved in the direction of international modernism, it is still his earlier, folkloric music that is best known and most performed. The Pampeana; (the title refers to Argentina's Pampas, or prairie) belong to a transition period, and their idealized portrayal of Argentine life has a mixture of nationalist, modernist, and quite personal elements.

personal elements.

The performances, by a good Venezuelan orchestra under the redoubtable Eduardo Mata, have energy and flavor, but the recording, although clear and present, is curiously gentle, perhaps taking a bit of the punch out of the punched places in the music.

E.S.

STRAVINSKY: Agon; "Dumbarton Oaks"
Concerto; other works
Orchestra of St. Luke's, Craft
MUSICMASTERS 67113 (25 min)

Performance City

Beautiful Polyla and dear Management Virus the comprehensive Stravinsty series understand by his brag-time
sty series understand by his brag-time
devoted to works composed in this country
between 1973 and 1975, Agon, the last of his
ballets, no of paramount interest since Craft
ballets, no of paramount interest since Craft
Ballanchine's staging for the New York. (197)
Ballanchine's staging for the New York. (197)
Ballanchine's staging for the Sorings—different
for each of the fifteen movement—is facility
for the contract of the cont

The "Dumbarton Oaks" Concerto for Chamber Orchestra, another prize item, also gets a crackling treatment, and Elizabeth Mann's flute solo is a marvel. The 1944 Billy Rose commission, Scéres de Bullet, is the only large-scale, full-orchestra work here, and its large-scale, full-orchestra work here, and dissonance of the introduction to the delicate tradic harmonics of the andantino "Pantomina" episode toward the end. The performance is expert.

The Eight Instrumental Miniatures, worked up from a 1921 piano piece, are delightful entertainment, winding up with a tellingly tart tango movement. Among the shorter pieces, I enjoyed Craft's super-rowdy treatment of the Circus Polka and was intrigued to hear the Scherzo à la Russe in its original instrumentation (for the Paul Whiteman band). The Gregg Smith Singers are heard to fine advantage in an a cappella version of The Star Spangled Banner that has some unusual harmonic touches, in Stravinsky's highly individual arrangement of Bach's chorale-variation on Vom Himmel Hoch, and in the curious Balanchine-Stravinsky Chorale, the composer's arrangement of a thirty-two-note melody with Russian lyrics that Balanchine wrote in 1946 as a sixtyfourth-birthday offering.

The recorded sound throughout is a pleasure, and I was consistently impressed by the vitality of Craft's conducting. Enthusiastically recommended! D.H.

SIYMANOWSKI: Violin Concertos STRAVINSKY: Violin Concerto Juillet: Montreal Symphony, Dutoit LONDON 436 837 (70 min) Performance: Rovishing Recording: Very good

Recording: Very good

arol Szymanowski's pair of violin concertos are hardly unknown, but this appears
to be their first major-label recording in recent

years. It makes one wonder why nobody did it sconer. Charles Dutoit and his Montreal or-chestra were born to play these works, which don't always seem like conventional concertos at all, but tone poems with a prominent role for violin. (Perhaps they're neglected because



there are so many other things going on that steal attention from the solvist.) Though each can be roughly divided into four sections, they're basically one-movement works, recalling Lists with their continuous flow and cyclical motifs. The musical language was Straussian at this point in the Polish composer's career, and there's some Straussian vertebosity, too, but the lash harmonies have a wooderful total ambiguity.

As the soloist, Chantal Juillet's cool, classical approach to the Szymanowski concertos is a welcome foil for their overheated quality. She gets to show off a bit in the Stravinsky concerto, which Dutoit explores with a geniality and sense of color that some might find anti-Stravinskian and others will consider a relief. D.P.S.

VAUGHAH WILLIAMS: Symphonies Nos. 3 and 4; "Greensleeves" Fantasia Philharmonia Orchestra, Slatkin

Philharmonia Orchestra, Slatkin RCA 61194 (73 min)

VAUGNAN WILLIAMS: Sinfonio

Antartica; Quick March; Five Variants of "Dives and Laxarus" Philharmonia Orchestra, Slatkin

RCA 61195 (53 min)

Performances: "Antartico" outstanding
Recordings: Excellent
alph Vaughan Williams's "Pastoral" Sym-

high Vaughan Williams's "Pastoral Symphony (No. 3) fares well in Loonard Slatkin's reading. The first two movements are, as always, ravishingly lovely—with the offstage natural trumpet in the second ineffably haunting. The captriculousness of the third movement's pretto is splendfully captured, and the finals has an apt intensity. Linda Hohenfeld's finals has an apt intensity. Linda Hohenfeld's louise with the property of the property of the control of the property of the control of the control of the property of the control of t

The sulphurous Fourth Symphony from 1948 is not quite as successful. Stakin pushes a bit too hard in the first movement, and in the slow movement. I miss the releastles stalking quality of the pizzicato basses and cellos I've beard in other performances, although the flute solo at the end is breathtakingly lovely. The scherzo is force and flast—impressively more of a dance quality. The nightmarth finale goes at a terrifying city, almost to the



Now Only

Cerwin Vega SW12B Subwoofer

Luxman DZ-92 Oria \$280

• Remote controlled single CD player 3-beam laser • Duai DAG
 20 track programming LAST \$99 CALL

Aiwa AD-F810 Orig. \$400 NOW ONL'

Pinnacle PN8+ Patented Compact Loudspeakers intented dual diaduct port system

 1° Liquid polymer dome tweeler . 10-125W RMS power handling 375W Peak nower handling. . Designed & manufactured in the USA Orig. \$400 NOW ONLY

BBE ARS Sonic Maximizer

SHIPPING & HEADPHONES

JBL L7 Floor Standing Tow

 4-Way lower system . 1° Pure Tilanium dome Iweel · 8" die-cast midbass . 12" Aquaplas bass drive

1.800 .542.7283 1.201 .838 .2516

> 1.201.838.2653 or Returns or Claims

/IOS • OVERSTOCK • ONE OF Δ KIND *199 CALL 459 mt 42002 Can re MSY3500 30W/rb

*169 *299 CALL *59 After Lansing ALC11 CALL 99 239 69 249 o source us one Compac cemer crunner spea atic Technology 100 Salelille/suvooler syslem atic Technology 200 Dolby& Pro Logic syslem **.**688

*179

*259

*399 *189 *149 *119 *79 CALL *799

*269 *119

1100

1166

40 CD6500 16-Bil 4X OS Single 40 BM6500 Seomasler AM,FM i uzooks 782 8" bass lube for cars

JBL PSIZD Powered home solwhooter wi?2' driver JVC TWSGB00 Sport Vish Hirl steem Vish wykemole JVC TW1905 Supersignine cassets deck Lumann PF144 AMILI-room later ge-amplier ALIO SSA9 Steps CD with remole control RAIO SSA9 Steps CD with remole control RIGA SF24 4-First speaker selector Philips PF840 C polity PTo Logic AV receiver whemche Philips PF840 C polity PTo Logic AV receiver whemche Philips PF840 C pfilips C polity PTO JUNIO PRINCE PRINCE AND PRINCE PRINCE

Innacio PRS+ 2-Way bookshell speaker CA WHP101 RF wireless headphones 5000 Dolby® Pro Logic surround sound processor adstream 06001 30With car power amplifier adstream 010001 50With car power amplifier echnics SAGX650 Dolby® Pro Logic AV receiver Terk AF9925 Amplified AAA/FM antenna JVC RX206 40W/ch stereo receiver compu-link

Advent Legacy II Floorstanding speakers Best Buy Recoton W440 Wireless speaker system JBL LXSOC 8"3-Way speaker system Innacia PK2+ 2-Way compact bookshell speakers Siereo digital headphones Passonic LX600 Laser disc player whemole JVC HR0X62U 4-Head storey VCR with remole control Mitsubishi CS13SXI Cable mady 13" color TV whem Phillips CDC33SBK Remole 5-Disc carousel with FTS

ADS C4006S 2-Way 6 1/2" in wall speaker Niles Niles 75 5-1/4" Square in wall speakers Panasonic RXDT880 AM/FM/CD/Cass portable Sonance \$830 White 2-Way in buildoor speaker Phillips CD950 Remote controlled stands Chilaba

Bang&Olufsen THORENS AudioSource PINNACLE SOUNDSTREAM SONY MADVENT phase linear

Hafler sage aıwa LUXMAN Canon exicon MB QUARTE CANTON CARVER A * MITSUBISHI ORION Panasonic

Technics DENON

LASER DISC PLAYERS

Orig. \$599 NOW ONLY · Combi Laser Player 425 Lines of horizontal re 20 Programmable tracks Remote controlled • S-VHS **Rockford Fosgate Amps**

1060X Series 1 Orlg \$299 2060X Series 1 Orig \$159 CALL

IASCA STANDARD MEASURE Hafler MSE88 4/2 Channel Car Power Amplifier Gold RCA inpuls w/adjustable • 75W/ch x 2 into 4 ohm · Runs mono & siereo simultane

. MOSFET with trans-nova circuitry 22W/ch x 4 into 4 ohm Orig. 1280 \$159 JBL CAR AUDIO **GTI SERIES Auto**

*139 *78 *329 *128 *368 *139 *229 *219 CALL CT963

PRECISION

POWER PPI4200 · 2-Ch power amplifier . SOW x 4 (4 ohms) . 100W x 4 (2 ohms)

. 200W X 2 Bridged Hughes AK-500 SRS

If used with tape recordings, the tape is permanantly pointed as a 3D mix. Astoundi

Rt 23, Kinnelon NJ 07405 Call 201+838+3444 Mon-Fri 9-9 • Sat 9-6 FOR A FREE CATALOG CALL 1.800.GET-HI I

Mail Order Hours: Mon - Fri 9-9 Sat 9-6 Monday - Friday 9-5

CLASSICAL MUSIC

point of hysteria; the fugal epilogue in particu-

lar seems rushed. The "Sinfonia Antartica" (No. 7), worked up from the composer's 1943 film score for the documentary Scott of the Antarctic, is one of Slatkin's most impressive readings. Everything works flawlessly. The atmosphere in the opening movement is truly chilling, and the wind effect is the most convincing I have heard to date. The awesome menace of the "Landscape" movement is enhanced by the climactic organ solo. The heart of the work is the fourth movement, with its movingly poignant oboe solo. In the epilogue, the offstage soprano (Hohenfeld again), the Philharmonia women's chorus, and more wind effects evoke as keen a sense of desolation as one could feel short of the actual experience

Vaughan Williams's snappy arrangement of British sea songs as a Quick March makes a fine opening for this disc, and the concluding Dives and Lazarus Variants elicit gorgeous string sound from the Philharmonia and some lovely harn and violin solo playing. My highest recommendation.

Collection



CHRISTA LUDWIG Farewell to Salzburg RCA VICTOR 61547 (69 min)

Performance: Moving Recording: Very good ith her operatic "farewells" behind her, Christa Ludwig is now giving farewell recitals in various locations where she was hailed throughout her thirty-five-year career. This program of songs by Schumann, Mahler, Brahms, and Strauss was recorded in an Austrian castle last January. Thirteen of the twenty-four songs are not included in EMI's comprehensive four-disc set of this remarkable singer's recordings in her prime years (1957-1969). It should surprise no one that her current form cannot match her old one: Her tone tends to spread in forte passages, and her dynamic gradations are less subtle than before. But her diction remains a model, and her low range has retained its voluptuous quality. Mahler's tragic Um Mitternacht and Ich Bin der Welt Abhanden Gekommen-familiar Ludwig landmarks-are as moving as ever, and she brings an opera singer's dramatic insight to Strauss's haunted Ruhe, Meine Seele. With fine partnership by the pianist Charles Spencer, this is an imperfect but still lovely souve-

GJ.



AMRAM: American Dance Suite; Theme and Variations on "Red River Vailey"; Travels for Trumpet and Orchestra; Three Songs for America

Manhattan Chamber Orchestra, Clark NEWPORT CLASSIC 85546 (71 min) David Amram (born 1930) celebrates his American heritage with all manner of vernacular influences, from Cheyenne Indian dances to the words of Martin Luther King. Jr. While his ideology is admirable, the music is often self-consciously illustrative. His combination of excitability and facility brings him dangerously close to



BERLIOX: Symphonie Fantastique LISXY: Les Préludes Chicago Symphony. Solti

LONDON 436 839 (69 min) Recorded in concert at the Salzburg Festival in 1992, this Symphonie Fantastique is less hard-driven than I would have expected from Georg Solti. There are good things here-the oppressively pensive introduction and the effective offstage oboe in the "Scène aux Champs"-but the reading as a whole adds nothing to the more effective performances already on CD. Far better is that old Liszt warhorse, Les Préludes, to which the Chicagoans and Solti give their all. The sonics have plenty of heft and D.H brilliance.

PROKOFIEV: Violin Concerto The Love for Three Oranges, Suite Bell: Montreal Symphony, Dutoit LONDON 440 331 (65 min)

Very attractive playing from Joshua Bell, who does not, however, for all his engaging warmth and animation, show the range of color we find in recordings of these two fascinating concertos by Kyung-Wha Chung, Isaac Stern, and other violinists, The rich-sounding recording is well suited to the material, though, and Charles Dutoit, a noble partner in the concertos, gives a stunning account of the suite from the opera. R.F.

RESPICAL: Roman Festivals: Brazilian Impressions; Pines of Rome Dallas Symphony, Mata DORIAN 90182 (69 min)

Eduardo Mata finds real music in these works, and Dorian's excellent production team has gone along with him to create another impressive showcase for the fine orchestra he made out of the good one he found at the beginning of his productive tenure in Dallas. Toscanini, Reiner, and Dorati are still more persuasive in The Pines, but the superb sound here can be a powerful equalizer.



SCHUBERT: Trout Quintet; Saven Hades

Ainsley; Lubin; Academy of Ancient Music Chamber Ensemble

FOISEAULI YRF 433 848 (60 min) Schubert's effervescent "Trout" Quintet sounds fresher than ever in this performance, in which Steven Lubin's fortepiano achieves a far more homogenous blend with the old-style strings than one normally hears with modern instruments. The disc's most distinctive element, however, is the inclusion of seven lieder written around the same time as the quintet-including The Trout, of course, whose melody is used in it. They're sung by John Mark Ainsley, a tenor with a boyish voice and an adult intelligence. D.P.S.

STRAVINSKY: The Fairy's Kiss

TCHAIKOVSKY: Francesco da Rimini Leningrad Philharmonic, Mravinsky RUSSIAN DISC 11 160 (66 min)

Both of these 1983 concert performances under the unforgettable Evgeny Mravinsky are quite exceptional (and the Stravinsky is the complete ballet score, not the divertimento extracted from it), but the sound just won't do for music that makes its impact at least as much with color as with substance Wind solos come through well, but the rest of the orchestra is pretty much washed out in the thin, dry sonics. Pity.

SEATTLE SYMPHONY SYRINGS Transformations for Strings

DELOS DE 3121 (71 min) European composers have traditionally written some of their most intense and personal music for strings, and the odd triplet on this CD conducted by Gerard Schwarz, music director of the Seattle Symphony, provide no exceptions: Webern, early and passionate, in Slow Movement for String Quartet, a souvenir of youthful love; Strauss, late and passionate, in Metamorphosen, an old man's testament; Honegger reflecting, in his Symphony No. 2, on the dark days of World War II with dramatic foreboding and tragic feeling, redeemed only at the very last minute by an uplifting and somewhat surprising trumpet chorale.

The performances do not plumb the depths

or scale the heights, but they are skillful

enough and nicely recorded.

Stereo Review C L A S S | F | F | N

For Advertising Information Call 1-800-445-6066, 9am-5pm EST

Please Note: It is impossible for us to verify all of the claims of advertisers, including product availability and existence of warranties. To confirm that an advertiser is authorized to sell a product, we suggest you contact the manufacturer directly. Please review our Tips for Mail Order Purchasers in this section.

CD CABINETS

CD STORAGE SHELVES, TOWERS, DRAWERS, BINDERS, SLEEVES, LARGEST SELECTION ANYWHERE GIT DEAS, FREE CATALOG

AUTHORIZED

CALL TOLL FREET (800) 826-0520. Map SONY - CARVER - CELESTION - AUDIOSONY - CARVER - CELESTION - AUDIOFOR THE CARVER - CELESTION - AUDIOFOR FOR CARVER - CELESTION - AUDIOFOR FOR CARVER - CELESTION - AUDIOFOR FOR CARVER - CELESTION - SOURCE
- FOR FOR CARVER - CARVER - LEICON
- FOR CARVER - CARVER - CARVER - LEICON
- FOR CARVER - CARVER

SAVE 40% ON HIGH-END home speakers, subwoofers, amplifiers. FREE CATALOG! RTRD, 3021 Sangamon Ave., Springfield, IL 62702. 1 (800) 283-4644.

SEDGHAMMER ALDAY FREISES FOCAL WIR & DIMMERICAL COURSIPACES with good prices and fost service. MADEQUIAD SPACES with good prices and fost service. MADEQUIAD SPACES COMPONENTS, 8008 University Green for 4503 Modern W SOTAL-4308, (600) 851-862. DEPERMENCED, FREISDUT ADVICES FREE SHIPPING IMBRACE, FRANCISCO, COMPONENT AND STATE SHAPE SHAPE COMPONENT AND STATE SHAPE SHAPE COMPONENT AND STATE SHAPE COMPONENT AND STATE SHAPE SHAPE COMPONENT AND STATE SHAPE SHAPE

IN CAS OF EMBROBINCH RISCONAUED, BERECITY MIDCAL STICKISS, Inches Name, Address, Phone for Younal Physcian, and Friend. Bloodlyse, Medication, Reaction, Allments, Insurance Cartier and Social Sociality (politicne), MMR SSfor(2) for Medical Ordis Bioboos, Box 163, Northridge, Californio 9925. HEGH-RID HOME, ALIDANDIVIE, AV LOUDSPARIES AND KIS, WIDE SECTION OF SPRANS COMPRINENT VIFA. DINNIUDICA.

WDE SELECTION OF SPEAKER COMPONENTS VEA DYMALDIOL, MR. PERRIESS, ALDIAX, OTHERS, FOR BEGINNERS & EXPERTS. FREE CATALOG, A48.5 SPEAKERS, \$170 23RD STREET SAN FRANCISCO. CA 94110. (415) 641-4573.

LOW PRICESS! Notomichi. CARVER. Polk. DE-

LOW PRICES!! Nokomichi, CARVER, Polk, DE-NON, Onkyo, PARADIGM, NAD, Parasound, B&K, KEF, M&K, Snell, plus more! SOUND SHOP 206-692-8201.

FOR SALE

B&W, CELESTION, DEFINITIVE TECHNOLOGY, KEF, MIRAGE, VELODYNE, ADCOM, B&O, CARV-ER, DENON, HARMAN/KARDON, NAKAMICHI, ONKYO, YAMAHA, AND OTHERS. S.T.I. (800) 370-1800.

CHEAP PRICES & FREE SHIPPING: ADCOM, ADS, ALPINE, BOS-TON CAR, BOSE BACOGAR, BALIPIANTI, CARVER, CLABION, DEPRHINT TECHNOLOGY, DINNON-POSGAET CAR, KIE, BIRSH-ITF, JRL, NC, KENYOOO CAR, NAD, PARADIGAR, POLK, GUARN-CAR, PIONERS SONY ISS, SONY CRS, SHERYOOD & TWAMANA, SOURD IDEAS, P.C. BOX 124, COMMACK, NY 11725. [516] 844-6484, RN, 1618 846-4457. BIG DISCOUNTS!!! CARVER, NAD, POLK, B&K, DENON, ONKYO, M&K, VELODYNE, GRADO, B&W, KEF, VPI, SNELL, SPICA, NAKAMICHI, PARADIGM, PARASOUND, AND MORE. STEREO TECH. 414-836-2942.



FREE CALL...(800) 423-1122...FREE CALL FOR BEST PRICE ON BOSE, CARVER, DENON, ONKYO, ADS, KENWOOD CAR STEREO. IN STOCK, FULL MANUFACTURER'S WARRANTY. NEW WORLD AUDIO (800) 423-1122.

audio EXCELLENCE a u d i o · v i d e o Phone us for expert advice, personal service, and great prices! Specialists in Mini Bluc - OR A - OR Converters

and great prices!

specialists in Miri Disc * DAT * DIA Convert
ansports * CD Players * Receivers * Ampli Loudspeakers * Turntables * TV * VCR's Camcorders and more!

FROM ALL MAJOR MANUFACTURERS

> (212) 229 • 1622 143 West 25th Street • N.Y. N.Y. 100 ALL HAJOR CREDIT CARDS ACCEPTED

BARGAIN BOCKS: Sovie up to 80% on publishers' overstocks, remainders, imports. Thousands of titles in over 40 subject oreas including MUSC, science, movies and TV, and more from \$195. Free catalogy Hamilton, Box 15-944, Falls Village, CI VIDEO LASERDISCS-Largest Selection. All Audio/Video needs call Colonel Video & Audio. Discount-Sony. Panasonic, Kenwood, Planeer. 1-800-423-VCRS.

FOR SALE

Wholesale Connection



1993: Mon-Sai 9 AM 6 PM EST Prices subject to change. Prices enclude ship ping 8 handling, Not responsible for hypographical errors. MasterCard, Ves., American Eugenes and C.O.D. accepted. Products come with W.C. Warrandy. Wholesale Connection 83-46 108h St. Forest Hills, NY 11375



B&W - CARVER - DENON - KEF - ONKYO - POLK - OTHER LINES AVAILABLE - 24 HOUR PRICING - COURTEOUS ASSISTANCE AVAILABLE - AMERI-CAN THEATER SYSTEMS - (904) 321-0100. HARD TO IND DOES ADC PMST SERVICE CAULAMET BIS. 5402 BUCHAMAN PLACE FREMONT CA 94538 (590) 490-4522 FAX (501) 650-650.

THREE BEST S1,500 LOUDSPEAKERSIII THX
HOME THEATER!! B&W - Alon - Celestion - KEF
- Hofler - Fosgate - Hamman/Kardon - Bang &
Olutsen - Denon - Adcorn - Polk - McCommock
- Eminent Technology - Carver - Crown - Velodyne - VMPS + 29 More brands - Honest
Advicel TECH ELECTRONICS, (904) 376-8080.

Not affiliated with Amerisound or STI.

TIPS FOR MAIL ORDER **PURCHASERS**

It is impossible for us to verify all of the claims of advertisers, including product availability and existence of warranties. Therefore, the following information is provided for your protection.

1. Confirm price and merchandise information with the seller, including brand, model, color or finish, accessories and rebates included in the

2. Understand the seller's return and refund-policy, including the allowable return period, who pays the postage for returned merchandise, and whether there is any "restocking charge.

3. Understand the product's warranty, is there a manufacturer's warranty, and if so, is it from a U.S. or foreign manufacturer? Note that many manufacturers assert that. even if the product comes with a U.S. manufacturers warranty card, if you purchase from an unauthorized dealer, you are not covered by the manufacturer's warranty. If in doubt, contact the manufacturer directly. In addition to, or instead of, the manufacturer's warranty, the seller may offer its own warranty. In either case, what is covered by warranty, how long is the warranty period, where will the product be serviced, what do you have to do, and will the product be repaired or replaced? You may want to receive a copy of the written warranty before

placing your order. 4. Keep a copy of all transactions. including cancelled checks, receipts and correspondance. For phone orders, make a note of the order including merchandise ordered, price, order date, expected delivery date

and salesperson's name. 5. If the merchandise is not shipped within the promised time or if no time was promised, 30 days

of receipt of the order, you generally have the right to cancel the order and get a refund. 6. Merchandise substitution without

your express prior consent is not allowed. 7. If you have a problem with your

order or the merchandise, write a letter to the seller with all the pertinent information and keep a copy.

8. If you are unable to obtain satisfaction from the seller, contact the consumer protection agency in the seller's state or your local Post Office.

If, after following the above guidelines, you experience a problem with a mail order advertiser that you are unable to resolve, please let us know. Write to the Associate Publisher of STEREO REVIEW Magazine, Tony Catalano. Be sure to include copies of all correspondence.

CDSTORAG



Soricé Systems - Setting the Standards in Audio/Video Storage Systems

· Store 300 CD's in this Premium Solid Hardwood

Cabiner. · Impeccably crafted in your choice of Solid Oak,

Walnut, Teak or Cherry, · Fully adjustable Shelves store any combination of

CD's, Videos and Cassettes - all in ONE cabinet. No-Slot design maximizes storage space, simplifies organizing & re-arranging your collection, accommodates single & multiple CD sets, allows

for possible changes in the size of CD packaging. Adjustable Solid Brass Bookends keep Discs & Tapes upright and in place.

· Cabinets can be stacked, wall mounted or left free standing.

 Optional Clear or Smoked Glass Doors are available. Completely enclosed back provides dust protection.

 Compact size: 39½ "H x 23½ "W x 7½ "D · Shipped to you fully assembled.

48473. 313-655-8639

P.O. Box 747-A Nutley, NJ 07110 We accept Visa, MasterCard, American Express, Checks and MosFor Prices and Free Full Color Literature on our Complete Line of Audio Video Storage Systems: Call Toll Free 1-800-432-8005 or FAX your name and address to 1-201-748-2592

COMPACT DISCS \$9.99. Send \$2.00 for 28 page (refundable) or \$10,00 for 12 issues, 10th Year, Viso/MC Buy/Sell AUDIO HOUSE, 43048 Brayon, Sworts Creek, Michigan

40,000 NEW CDS \$4-to-\$12 FREE details. Compact Music-SR. 1105 Webster, Sandy, Utah 84094-3151. Phone/fax (801)



WANTED TO BUY IP's & CD's, BOUGHT & SOLD: Clossicol, Rock, Jozz, Aus

ophile, Etc. PRINCETON RECORD EXCHANGE, 20 Tulone St., Princeton, NJ 08542. (609) 921-0881 Mointash and Marantz tube type HI-R; and old JBL, Aftec Toppov PV Patrician and Western Flectric speakers, David

MISCELLANEOUS unaffached music lovers. Witte CMLE, Box 31, Pethom, NY 10803. (800) 233-CMLS

MISCELLANEOUS TERMPAPER assistance. 19,278 papers available! 306-page geles, 90025, TOLL FREE HOTUNE: 800-351-0222, (California)

BUSINESS OPPORTUNITIES PUBLISHING FIRM DESPERATELY NEEDS PEOPLE RANSCRIBE FROM HOME, \$35 PER ITEM, NO EQUIPMENT OR REPRINCE REQUIRED SEND SASE TO RABBIT MAN, DEPT. CW. LOUDSPEAKERS

Parts Express is a full-line distributor of electronic

parts and accessories, geared toward the consumer electronics industry, and the technical hobbyist. Stocking an extensive line of speaker drivers and accessories for home and car. Call for your free 172 page catalog today.

FACTORY DIRECT SERVICE on OHM Brand speakers up to 22 years old with many upgrades available. OHM Acoustics Corp., 241 Taaffe Place, Brooklyn, N.Y. 11205 (718) 783-1111. LOUDSPEAKERS

REPAIR FOAM ROT FOR YOURSELF! SAT will save you hundreds of dellars sizes including AR, Advent, BOSE, Surrounds, achesive & instruction \$27,96/pr. 805E 901's \$67,96/pr. (in S/H. No COD's) De it yourself with \$1



BOTTEN FOAM EDGES? LOWEST PRICES, REST WARRANT

Speaker recording, DY Foom Surround KHs. VisatMC/Discover SIMPLY SPEAKERS: 1-800-767-4041. STATE OF THE ART CROSSOVER NETWORKS, UPGRADE ANY SPEAKER SYSTEM, FREE DESIGN GUIDE, ALLPASS TECHNOLOGIES INC., P.O. BCIX 453, AMITYVILLE, NY 19701 (516)698-1320.

RECORDS LVICD/RECORD COLLECTOR'S SUPPLIES. Jewel baxes, record jackets, sleeves, storage baxes, 78 sleeves, dividers, much morel Free brochure: CABCO PRODUCTS, ROOM 641, POB 8212, COLUMBUS, OH 43201, 6161 267-8468. EXES/CARTRIDGES & Belts-Expert Consultations, All A

Por Brands, One of Largest Stocks in Country Including Olds Obsolete Models. NEEDLE DKPRESS 1-800-982-2620. RECORDS AND CD BARGAINS FACTORY FRESH OVERSTOCKS AND DELETIONS, ROCK/POPLIAZZ COLLECTIBLES, GOOD MUSIC GREAT PRICESI MONTHLY UPDATE, FREE CATALOG, RPM SALES DEPT. SRC, P.O. BOX 1348, SOMERVILLE, MA 02144 1-800-388-1386/FAX 1-617-776-2514.

HALF MILE VINYL AFFORDABLE PRE-OWNED LPS, SELECTED WICARE, CLEANED & GRADED, ALL CATAGORIES, CALL FINFOR-MATION, SASE CATALOGAWANTS: BOX 98, EAST WAREHAM, MA 02538. (508) 295-2508

NEW PRODUCTS

CABLE TV DESCRAMBLERS

CONVERTERS + ACCESSORIES * Name Brands * Lowest Prices * PRIME TIME (800) 777-7731 Electronics, Inc.

ABLE T.V. CONVERTERS. Jerrold®, Zenith, Pioneer, Oak Scientific Alianta, And Mony Morel 12 Years Experience Gives Us The ADVANTAGE ViscHAC, Amex, COD, ADVANTAGE ELECTRONICS, INC.; 1-800-952-3916; 1125 RIVERWOOD DR.

CABLE TV

CABLE TV DESCRAMBLERS. SAVE MONEY, DON'T PENTL NORODY REATS OUR PRICE! CALL LIS LAST FOR THE BEST PRICE! ALL BRANDS 24 HOUR SHIPPING, VCI 1-800-677-0321.

ARE YOU TIRED OF PAYING A HIGH MONTHLY CARLE FEE? WE STOCK ALL MAKES & MODELS OF CABLE EQUIPMENT. FOR FREE CATALOG SEND SASE TO: CABLE-TRONICS, INC., 450 SHAGBARK, ALGONQUIN, IL 60102 OR CALL (800) 232-5017, VISA/MC/COD, NO ILLINOIS ORDERS.

ATTENTION STEREO REVIEW ADVERTISERS

Reach proven mail order buyers! They turn to us when they are looking for purchasing information and advise. Advertise your products and services in a low-cost environment that sells. Millions of your prime prospects can be found in the industry leading titles of Hachette Filipacchi Magazines, Inc. To place a classified ad, simply call Toll-Free:

1 (800) 445-6066

9am to 5pm EST In Canada call (212) 767-5750

RETAIL MART

FINALLY-MALUE REDERINED. You Don't Have To Sell The Fo Real Class A Design Performance, N.E.W. Designer NELSON PASS (Threshold, For TE, ESS.) Proved it First With The Legendary Classic Pass A 40 Amplitier. Now, A New Sonic Threshold Acheived - The More Musically Amazing N.E.W. A 20 High Bigs Class A Amplifier, Only \$598! Highly Recommended Re Available, Also, The Ultimate Home Theater Amplifier, 30 Day Home Demo. N.E.W., BX 1148. Rancho Santa Fe, California

PUBLICATIONS COMMON SENSE GUIDE to purchasing stereo equipment. 21 years experiencel Tips on what you NEED to know. Send \$9.95 to COMMON SENSE GUIDE, P.O. Box 36183, Des Moines, P.

CABLE TV

CABLE TV CONVERTERS/DESCRAMBLERS, Guoranteed lowest prices in U.S., Jerrold, Hamlin, Zenith-many others! Lowest dealer prices! Orders shipped within 24 hours! MasterCard-Visa-C.O.D. accepted. For Free catalog, orders and information, call (800) 345-8927, Pacific Cable Co., Inc., 7325 1/2 Reseda Blvd., Dept. 1394, Resedu, CA 91335

Cable TV Descramblers, Converters, Accessories, Name Brands, Lowest prices, Best service, Call CABLE READY COMPANY (800) 234-1006 for FREE 16-page color catalog.

This publication is available in microform from UMI.

800-521-0600 toll-free 313-761-4700 collect from Alaska and Michigan 800-343-5299 toll-free from Canada

We don't sell perfect systems.

After 15 years, we've learned no perfect system exists. It has to be built-to your specifications, within your budget. To help you, we've selected the 60 companies that offer

the finest equipment, at the best value. We'll proceed step by step until you're satisfied that the system you purchase is the perfect system for you.

To get started, call us today, and ask us how.

310 517-1700 310 517-1732 fax





ASK US HOW.

AUTHORIZED DEALER: AKG · ATLANTIC TECH · AT OUEST AUDIO ALCHEMY · AUDIO CONTROL · BEYER DYNAMIC · B ABS - CARVER CELESTION · CLEARFIELD · COUNTERPOINT · CWD · DAHLOUIST · DCM · FOSGATE · GENESIS

GRADO · HAFLER · HARMAN KARDON · HUGHES · INFINITY · JAMO · JBL · LEXICON MAGNUM/DYNALAB · McCORMACK · MELOS · MERIDIAN · NAD · NESTOROVIC · NHT · NILES ONKYO · PARASOUND · PHILIPS · PIONEER · POWER WEDGE · PROTON · PROAC · PSB ROOMTUNE - SONANCE - SONIC FRONTIERS - SONY - STAY - TARGET - THORENS - TICE - VPI

Stereo Review



ADVENT

DENON

- NILES · ALPHASONIK · ONKYO BAZOOKA PIONEER
- · BOSE BOCKFORD CARVER SONANCE
- · SONY ES INFINITY * AND MANY MORE SEE US FOR BEST PRICE THE SOUND APPROACH



udio Concepts, Inc

Since 1977 La Crosse WI 54601 Voice (608) 784-4570 Fax: (608) 784-6367 Ask for a free catalog on our full line of loadspeakers



M&K NAD NILES PARADIGM ALCHEMY PS AUDIO APATURE SONY BOSE GRADO SONY ES

HAFLER THORENS (617) 547-2727 Q AUDIO M-F 10:00-7:00

SUMIKO

95 Vassar Street SAT. 10:00-6:00 Cambridge, MA 02139 WE LOVE TRADE-INS Please bring us your old gear

176 ER CTW 500F HIFONICS GEMINI PHILIPS DCC 900... THE BEST IN QUALITY AND COMPETITION CAR STEREO MANY MORE IN STOCK THE FINEST IN HIGH-FIDELITY We Will Beat Any Advertised Price HITACHI 27AX1B

CD-PLAVERS

CARVER SDA 360

JVE DIGI XLZ 1050

PHILIPS CD 950

PRONEER POT M3 337

Trained experts to help select.

components

TAPE DECKS

atch & integrate

SONY COP DAYS

THE YEAR SOO

PHILIPS

CARVER HR 74

DENON AVR 2000

HAR KAR HK 3500

HAR KAR AVE 30

AUTOTEX 7:0081S CLARION 1700RT

JBL GTO 200

JMC KSBX 750

DIONECO M.C

SOMY VEHI 222

DIONECD VEHIOUS

JVC BX 509

CALL KENWOOD OP 2050 158 KEWWOOD DE 6650

157

258

324

CALL 248

CALL PIONEER POM 702 PIONEER POM 902 193 279

In This

ublication Prompt Delivery On The Finest Audio and Video Components

HITACHE STRIKES

588 JVC HRJ 600 255

TOSHIBA M 756 568 PANASONIC LY 900 DALL SONY MODISON

CALL

CALL

548

147

CAL

w-Back Guaran GUARANTEED Defectives Gladly Exchanged

RECEIVERS 469

PIONEER VSX 452 PIONEER VSX 09025 398 672 245 AD M AS 416 BIDAKS BIC V12 POWERED The Best Service • Best Prices DES. ACOUST. PS CV UAD VAD TACHTS

CAR STEREO PIONESS IN- IN

248

127 297 299

207

237 158

PIONEER TSA 6940

DATMEED TO A 1001

POWERED SUB WOOFERS IN WALL SPEAKERS BAZOONA TROA 258 SYSTEMS INFINITY RS6603 145 IMPRINTY KARRA 63 POLK MANAGES 295 KENWOOD NEC 6963

INC NO. KEKWOGO UD 351M KENWING TO THE PIONEER CCS 325 SONY MHC C90 Custom wiring &

JAMO SW300 SYSTEM

NHT SW 2 PWD

PARADIEM TITAN PINNACLE PN 5-

AMA SAT/SUI

in-wall projects CABLING & ACCESSORIES

THE FINEST IN AUDIO GEAR The est Prices With

The Best Customer We are devoted to 100% Customer Satisfaction

Fully Authorized with Manufacturers Warranty

351 MITSURISM 3520 100% Satisfaction Guarantee - Ever innany, NJ 07981 • MON-FRI 10-8 SAT, 10-5 NEW ADDRESS: 9 Whippany Road C-3 *

WE ACCEPT ALL MAJOR STORE: 201-503-9444 INFO: 800-872-1002



years of experience. Our warehouse is stocked in-wall and mobile speakers.

Our goal is to help our customers re-create the most pleasurable listening environments their budgets can provide.

Our recommendations don't just come from a spec-sheet... but from first hand experience.

speakers in a surround system.

at an affordable price!

Premium Monthly Specials

One of the better values in a floor standing speaker. They also work well as front.

ntic Technology System 150 \$796

3-way floor-standing monitor. British nobility

We really can save vou a fortune...

A complete 6 piece home theatre system, WE DON'T JUST SELL TOP of the line equipment...
we sell it at discount. We understand what it 9-front, 9-rear, center and 70 watt powered sub-woofer, white or black finish, brackets. means to purchase the components of your dreams Bose AN-5 II & AM-7 and how disappointing it can be if you have no Virtually Invisible! Acoustimass** money left for tapes or discs.

Our prices are as good or better than

any merchant in this publication - everyday. But money isn't the only thing to consider when buying loudspeakers. Sound-quality, accuracy, performance and value all need to be evaluated when choosing the best speakers for your specific needs.



colors, brackets supplied at no charge

We're talking selection... ROM THUNDERING SUB-WOOFERS to precise acoustic-

F static towers, we have the speakers you've always wanted. Call our toll-free number and get connected with a virtually limitless selection of quality loudspeakers. 30-Day 'Satisfaction-Guaranteed' Trial Period



535 Tabor Road, Morris Plains, New Jersey 07950 Phone: 901-984-5900 • Fax: 901-538-9578 YOUR COMPLETE SATISFACTION GUARANTEED . FULLY AUTHORIZED DEALER

DOLBY PRO-LOGIC . S-CHANNEL SUPROUND SOUND . REMOTE SY WE GLADLY ACCEPT . VISA . MASTERCARD . AMERICAN EXPRESS . DISCOVER

■ WIRING & INSTALLATIONS ■ HOME THEATRE п



Save \$1501

Authorized Dealer For:

· NAD · GRADO LEXICON · PROAC · ATLANTIC TECHNOLOGY . APATURE

TARGET

 NAKAMICHI * ALIDIOCONTROL · PROTON · CWD - CELESTION . STAY - DAULOUST . CANITE

Stereo Review

 NILES AUDIO
 NITTY GRITTY MAK SOUNDSTREAM ONION HARMAN KARDON · MONSTER CABLE ADCON. ALTEC LANSING BOCKEORDEOSCATE THORENS

· POLK AUDIO 2808 Cahill Road, P.O. Box 224 Marinette, WI 54143 1-800-826-0520 (715) 735-9002

ON HOME & CAR STEREO

The SOUND Approach FACTORY (800) 368-2344

(800) 229-0644

AND CARTRIDGES, World's



M-Sat 10-7 Sun 12-5

NO BULL.... 1-800-NO-BULL-94

(800-662-8559) • INFO 1-908-651-8400 VISIT US LAST WITH YOUR BEST

ADVENT HEOMICS ALTEC ALPACE AL	LEGIT DEAL & WE WILL BEAT IT				
ADVENT HEOMICS ALTEC ALPACE AL	AU	TO	HO	ИΕ	
CERWIN VEGA* PRECISION POWER JBL* SONAN	ALTEC A/D/S' ALTONE AUTOTER BELL' BLAUPUNKT' CERMN VEGA* CODE ALARM	HIFONICS INFINITY JBL* JVC* KENNOOD PIONEER* POLK PRECISION POWER	ANNA* ATUATE TROUCLOS* B & K* CESTMIN VEGA* DESIGN ACOUSTICS* B & K* ANNA*	MITSUBS MLEST ONKTO PHILIPS PIONEE! USSEKUM PINNACL RCA* SONANC SONANC SONANC	

ALL CAR AUDIO & HOME THEATRE



SPEAKERS LCD PROJ.

RECEIVERS CASSETTES COMPACT DISC I ACED DI AVEDO MINI SYSTEMS

TV's /All Che ARE CUSTOM DESIGN SYSTEMS SPECIALISTS ECTROWORKS, INC

AMEX - C.O.D

ABC 1-800-354-1324 225 325 Onkyo DX-C806 DX-706 Call Call 199 DPC735 Cat Cas 325

INFINITY DEPTHETREDISAL A MICRO II SYSTEM \$5910 \$59210 ##W212

ALDED J CAN CAN EASTA CTR CH RE 625 BE 525 88 425 RE 323

RS SUBS CALL RS VIDEO CALL EN 152 DE 122 DK 112 EN 102 EX 82 EASTA 8.1

28 G EASTA 7.1 EMP2 6.1 EASTA VIOSO RENAISSANCE AND MORE CALL! I'VE 10 INFINTY CAR

JVC VIDEO EDS (900 SALE CALL) 200 800 THE ADDRESS STREET SALES MAY 700 May 606 XXYP 604 GR4 505 MO 110 355 JVC AUDIO

MINCH

BOOMBOXES

TOY1050 X251010TH 32200VTN 1750 Rd EX709VTM 1430 RE RESORTS 82309TH 5750 PROE BX206BX 323509TH Res 120 HG ILBATTS. XLE4517N from 120 M18 XLF211TH TOWNSONTE DOM: 120MINETARY TOWNSON BOM 60 MIN SYSTEMS tem 60 MIRROR were

MAXELL

120 KIFI

& DISCHAN JVC CAR 120 FORE NA AUDIO 389 180 FVES 12.41 TIMO BOOK 345 tm 828 120 X180 70085 295 km KI\$ 60 237 Ban 90 XLMX 500 4.71 **** 250 gam 120 820 TIA 1900 X14 2900 225 PILTI ESRT 70 179 120 PVIII 6.99 CDE5060 160 SVES 9.99 CDES460 185 ECRE 100 120 A/V FRO 2.89 CDED0000 160 A/Y 280 3.99 CBET393

HORE CALL! TDK 3.19 MDX-01 7.49 MBX220 7120 ESG *HITACHI TIRD FYES VT#772 VTFS51 V27462 VEF272 CALL ENDERO **7160 ERG** CALL TRACAS \$m120E00VEVAP 12.19 TW1060 VM8200 10057 tem fostgreen 9.39 mg140 AND HORE! 8mm 120 HIR 7.29 XM6020 *G.E. CALL Sam 60 HIS 5.29 mc2000 *RICOR CALL JVC 120 SVBJ 7.49 XBBHKII JUC 1300/88883 10.59 88700 * R C A BASE TIES 3.29 EMC1000S BASE TIRES 6.29 NICIA V2200 VR.661 VR657 BASE TOOLSO 7.79 99576 19526

220883 280130

AND MORE!

AVAILABLE CALL AND MUCH MORE! 2898 N. UNIVERSITY DRIVE #35 CORAL SPRINGS, FL 33065 FACTORY AUTHORIZED

AUTHORIZED DEALER MEANS A VALID WARRANTY AND BRAND NEW! 14 DAY TRIAL PERIOD FOR DETECTIVE EXCHANGES

AUTHORIZED AUDIO/VIDEO/CAR

HOME

CDEAFERC

ACCOUSTION

ADVIDIT

ATW

NIMA

ATLANTIC TECH.

BIC

CELESTION

DAHLOUIST

HARMON KARDON

JBL

XEX

NAD

NILES

ONICYO

PARASOIDE

PIONEER ELITE

POLK

SANSUI

SHERWOOD

SONY E.S

PECHANICS

CAR AUDIO

ADCOM

ALTEC LANSING

BAZOOKA

CLARTON

TRE.

159 PIONEER

1-800-348-7799 BRAND NEW FACTORY COMPLETE

MANUFACTURERS FULL IISA WARRANTY FAST DELIVERY

WHEN YOUR DONE SHOPPING AROUND, WE'LL BEAT ANY OTHER AUTHORIZED DEALERS ADVERTISED PRICE!!

SONY VIDEO PIONEER CAR SHARP SALE CALL: SUFFICE SUITSONY PEN 75A 725 STOCK SLUSORES #LVR1000 DEN 990 DEF TVN 250 SALE CALL STATEOU SLAT'360 DER 980 ENT 10 SALE CALL SLEF2000 SLEFFING DEN BOO 369 NEW CALL DER 780 VI.AT. 100 CALL MOPEON MOPES DEE 730 CALL MOPEOS

CALLI OCCUTATION DEED \$20 PRO LINE LCD T.V. - S CCDVE) CALL CC048300 CCDTR500 DEX MAGO CCDTR21 CEX-T70 CC04362 VIDEO CALL CCDFE620 KRIDE \$500 00089718 GREAT THE BOX (10) OWLY ETVEZORS EVE3000 KEEK \$200 GMC0 KEEK 7500 CONTTO REEN 7300 265 Q1950 SONY TERMESON XL11050 DAT 120 7.59 SONY AUDIO KEEKS500 ATV1050 1750 NG.

3.59 2.89 STR20090 4.29 STR2911 FTS:01011 EXE 9494 TS 201 STREFT11 KER 2200CR 6.99 FTRD611 STRES11 KER 6969 169 5.39 STREETS CDOC735 CDOCPICS 381 7.39 0000910 CDF-CX100 CDXFX35 311 11.29 CD9C335 CD0C235 CD0D(30 275 3.55 PEC690 TOWNS 355 CDUDE 12 TOWERS COUNTY 9.19 ***** 7.49 TCE6115 TCRX311 EQ6500 wery 7120 EVES 165 MMC 510 GMM 200 MRC610 MESS

CHEATER

CONTRACTOR CHURADAR

HAPLER MECC70 CHEE 100 185 INFINIT wanner. MD6101 CMCK 840 OR 900 91 3.49 Latt0220CD Latt0110CD CHEE44 SONY ME CALL! 75-A 6980 125 PAIR 7.43 KRIMOO TS-A 6970 95 PAIN FULL LINE OF TS-A 5705 69 PAIS KICKER TE-8 4105 75 PAIR NILES ROOMBOYES AND TS-A 1680 95 PAIN PTONERS DISTONAN TS-A 1675T CALL TS-A 1395 65 PAIR 3.89 POLK TS1600 II 105 PAIR SONY CAR TETREBOO 165 PATE AUDIO

CDEUS-00

XX0110

200330

XX2500

DM 520

D4040 VEXD7028

ERSONETT

XBC7008

SPEAKERS

REMOTES CALL

100X35

VERDIR II

EX201

SABSPACE TEW 301 59 PAIR COX5260 TEP 461 SONY CDED5260 TSC1601 110 PAIN POSITER CERTAGE TETRE 1000 CALL BOSE LIFESTYLE MUSIC MORE MODELS SYSTEMS CALLII PREMIER CALL 99177 PIONEER

EMCGOOD VAL 452 VEX 402 SPEAKER SYSTEM VERYSON LT CALL JBL S12518 F449 LJ CALL SP 7000 OR 222 17 603 GR 470 LX 440 VEP 333 20TKO J2080 32060 BROWS 07 34130 PEN 502 PRO 3 PLUE 220 1 CTM 628 CTM SUZE MP. , P. SERIES CALL CTME 6028 CTMN 5028 MUSIC 1 CALL

301 III 201 111

VEX.DEGIS 100 VEX.DEGIS 100 VEX.DEGIS AM POWERED

VERNOUS 151 IN WALL SPEAKERS

CLDD 702 ADVENT BAST III 129 PAIR LMGACY III 289 PAIR KARAGEE 250 PATE CLEV740 BER ITAGE SALE CALL CLEVS40 SALE CALL CAMCORDER ASTRINCOPEN 225STETE

THE CHARL BATTERIES DUAYS 179 PAIR CALL!! MINT FREATURE 115 PR

Stereo Review

RFTAIL MART Comput Ability Mon. Fr. Barn Sp.

(I) PIONEER JVC

Cassette Decks A/V Recivers CD Players D-V661TN RX-509TN XL-M509TN W709TN BX-709Th XL-M409TN XL-Z451TN RX-809TN

SONY JVC CD Boom Boxes npact &Mini Sys CFD-445 CFD-580 CFD-560 CFD-758 MXS4 MORE

MODELS AVAILABLE

CFD-570 CFD-768

Canon Panasonic SONY. JVC 800-554-2183

Millions of your prime prospects can be found in the industry leading titles of Hachette Filipacchi Magazines, Inc To place a classified ad, simply call toll-free and

reserve your space today 1-800-445-6066 (9am-5pm EST) In Canada: 1-212-767-5750

Straight Talk.... 106 Brands Available! AUTHORIZED DEALER

AWARD WINNING DEALER 34 YEARS

> We are not aware of any one facility that has the unique combination of physical size, depth of inventory, and number of

quality lines to complement our approach to display, demonstration and competitive pricing.

KANSAS UNIVERSITY STUDENTS & ALUMN APP ABOUT OUR

SPECIALS

913-842-1811 24TH & IOWA Lawrence, KS 66046

""ARMORED BAR" Anti-theft Steering Wheel Lock.

The best choice. The best value Protect your car against theft with the Armored Bar. Easy & quick to use—it's simple as 1, 2, 3. Unlock Bar, extend onto steering wheel



Disables Steering System-Lock on steering wheel and it's impossible to turn Hi-Visibility Theft Deterrence Clearly seen through windows Cross-Key Lock -Key is almost impossible to duplicate Lock tumblers are virtually pick-proof

No Annoying False Alarms



ABOVE THE COL Pushbutton Lock Mechanism— Easy to use-no need for key-just push to set Cross-Key Lock —Key almost impossible to duplicate Heavy-duty Solid Die-Cast Lock Housing
"Anti-Mar" Ball End—For easy installation & protects vehicle interior ■ TRIDENT END—For a more secure

fit, less play when installed on "thick" or "thin" steering wheels VISA. 1-800-447-2559

COMPARE AND SAVE! FACH

Fla. residents add 6.5% sales tax.



Index to Advertisers		
Reader	Page	
Service No.	Advertisor Number	
	20-2 III Istics. 25 hnology 1117 nica 4 Systems 76	
BMG CD Ch Bose 9 Boston Acou	ub162,1	
6 Cambridge S 24 Celestion	SoundWorks	
28 DCM 15 Definitive Te — Design Acou 28 Digital Phase	24 echnology 34, 35, 37 sixts 43 c 61	
Electronic W Energy	/holesalers	
— Illinois Audi	io 144	
32 J&R Music W — JBL	Vorld	
35 Klipsch	C	
— Linn Hi-Fi		
— Marlboro 39 Mobile Fideli 37 Mobile Fideli 38 Mondial	31 ity	
40 New West El 42 Nordic Track	lectronics	
50 Paradigm — Pioneer	45-50	
- Rally Accesse	ories	
6th Avenue I Sony Sound City	Electronics 150-151 6-7, 28-25	
— U.S. Army	CI	
41 Velodyne		
- Warner Musi	ic70a,b, 146a,b	

bruarv

TIME DELAY



tape recorder and was "unable to hear any difference between the incoming and outgoing signals" when he recorded stereo tapes off the air.

So there! In the satiric feature "Facts About Hi-Fi," author Jim Wilder was asked to explain the advantages of using 72-ohm rather than 300ohm wire in an FM antenna. His succinct reply: "No."

Stereo Revie



Sonnie Raitt (pre-Grammy

in wedgies." Eric Salzman evaluated Janine Dacasota's Musical Heritage set of neglected Weber piano sonatas in baseball terms ("Good field, no hit"). And Lester Bangs. confronted with the Who's latest "rock opera," "Quadrophenia," declared it "worth your attention even if you hate both noisy guitars and Verdi.'

CD-XI programmable CD player, which weighed significantly less than the company's first-generation



30 Years Ago

February 1964 column, editor Furman Hebb took up the issue of a high-power U.S. Air Force radar unit that was causing audible beeps in most hi-fi sets and TV's in a suburb of Pittsburgh. "Frustrated hi-fi listeners in the area," he noted, "have taken the extreme step of moving to sections of the city shielded by hills."

New products this month included the Harman Kardon A-1000T transistorized stereo amplifier (\$370) and the Sonotone Mark IV ceramic phono cartridge, with a frequency response of 20 to 17,000 cps (Hz) and a recommended tracking force of 1.5 to 3 grams. In test reports, Julian Hirsch examined the Ampex F-44



20 Years Ago

Can we pick 'em or what? Among the winners of STEREO REVIEW's annual Record of the Year Awards was "Greetings from Asbury Park, N.J.," the debut album of one Bruce Springsteen, As of February 1974, "Greetings" had sold less than 12,000 copies.

In Best of the Month, George Jellinek hailed the new RCA recording of Puccini's Tosca with Leontyne Price ("the best recorded treatment of this opera in twenty years"), and Noel Coppage gave a thumbs-up to "Takin' My Time" by future Grammy winner Bonnie Raitt ("a timeless appeal"). Elsewhere in the review sections. Peter Reilly called an Andrews Sisters reissue "as surreal an experience as seeing an elephant walk down the street

included the Superbend speaker system from Boestedt. the Teac Model 360S cassette deck with Dolby B (\$360), and the Telephonics TEL-111 electret-condenser headphones, available in both stereo and quad models. In test reports, Julian Hirsch praised the Hitachi SR-5200 receiver's "first-rate performance in almost all domestic listening circumstances" and called the Akai GX-285D open-reel tape deck, the company's first with Dolby B, "truly impressive."

New products this month

Good news for Joey Buttafuoco: In an interview. the conductor and



harpsichordist Raymond Leppard described the seventeenth-century composer Jean-Baptiste Lully as "surely the bastard of all time."

10 Years Ago

New products this month included the Discwasher Zerostat, which removed static from LP's and looked ominously like a Star Trek phaser weapon, the Yamaha


CD players, and the Pyramid Met 11 speaker system with time-aligned and phasecorrected drivers for improved imaging. In test reports, Julian Hirsch called the Kvocera




R-851 receiver "unusually muscular and conservatively rated" and said of Dahlquist's DQM-3 speaker, "We have no hesitation in recommending it for use in any moderately priced system."

Like the Beavis and Butt-head album? In Letters to the Editor, reader Richard E. Andrews of Howell, New Jersey, declared himself in favor of the compact disc over the declining LP, but with one potential caveat. "The question," he wrote, "is whether the manufacturers will find some way to trash up the CD." -Steve Simels



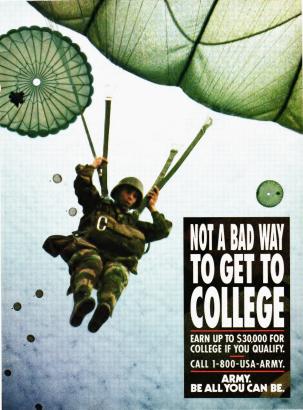



GREAT HOME THEATER DEMANDS GREAT SPEAKERS. IT'S AS SIMPLE AS THAT.

Precious few home audio speakers can handle the dynamics of a movie soundtrack the way Klipsch speakers can. Klipsch's unique hom technology supplies the high efficiency, wide dynamic range and controlled directivity vital to recreating real movie theater sound in your home. The most challenging digitally recorded motion picture soundtrack is reproduced in all its glory, with less distortion than conventional speakers. Klipsch produces a variety of speakers aimed at home theater—center channel, left and right front channels, left and right rear channels and powered subwoofers—to achieve a true theater-like sound experience. If You want to build a great audio and home theater restem.

the choice is simple – Klipsch. For the name of the authorized Klipsch dealer nearest you, call 1-800-KLIPSCH.

